

MMBD4448W6

SURFACE MOUNT FAST SWITCHING DIODE ARRAY

FEATURES

- Fast Switching Speed
- Ultra-Small Surface Mount Package
- For General Purpose Switching Applications
- High Conductance
- Lead free in compliance with EU RoHS 2011/65/EU directive
- Green molding compound as per IEC61249 Std. . (Halogen Free)


MECHANICAL DATA

Case : SOT-23 6L, Plastic

Terminals : Solderable per MIL-STD-750, Method 2026


Approx weight : 0.0005 ounce, 0.014 gram

Marking Code : B48



SOT-23 6L

Unit : inch(mm)

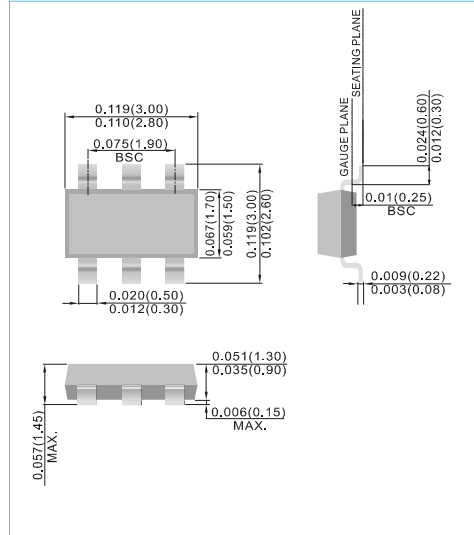

MAXIMUM RATINGS (T_A = 25°C unless otherwise specified)

Characteristic	Symbol	Value	Unit
Non-Repetitive Peak Reverse Voltage	V _{RM}	100	V
Peak Repetitive Reverse Voltage	V _{RRM}	80	V
Working Peak Reverse Voltage	V _{RWM}		
DC Blocking Voltage	V _R		
RMS Reverse Voltage	V _{R(RMS)}	57	V
Forward Continuous Current (Note1)	I _{FM}	500	mA
Average Rectified Output Current (Note1)	I _O	250	mA
Non-Repetitive Peak Forward Surge Current	I _{FSM}	4.0	A
		2.0	

THERMAL CHARACTERISTICS

Characteristic	Symbol	Value	Unit
Power Dissipation (Note 1)	P _D	350	mW
Thermal Resistance Junction to Ambient Air (Note 1)	R _{θJA}	357	°C/W
Operating Junction and Storage Temperature Range	T _J , T _{STG}	-55 to +150	°C

MMBD4448W6

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise specified)

Characteristic	Symbol	Test Condition	Min	Max	Unit
Reverse Breakdown Voltage (Note 2)	V_{BR}	$I_R = 2.5\mu\text{A}$	80	-	V
Forward Voltage	V_F	$I_F = 5.0\text{mA}$	0.62	0.720	V
		$I_F = 10\text{mA}$	-	0.855	
		$I_F = 100\text{mA}$	-	1.000	
		$I_F = 150\text{mA}$	-	1.250	
Reverse Current (Note 2)	I_R	$V_R = 75\text{V}$	-	2.5	μA
		$V_R = 75\text{V}, T_J = 150^\circ\text{C}$		50	μA
		$V_R = 25\text{V}, T_J = 150^\circ\text{C}$		30	μA
		$V_R = 20\text{V}$		25	nA
Total Capacitance	C_T	$V_R = 6\text{V}, f = 1.0\text{MHz}$	-	3.5	pF
Reverse Recovery Time	T_{RR}	$V_R = 6\text{V}, I_F = 5\text{mA}$	-	4.0	ns

Notes : 1.Device mounted on FR-4 PCB 70 x 60 x 1mm pad layout.

2.Short duration pulse test used to minimize self-heating effect.

3.No purposely added lead.

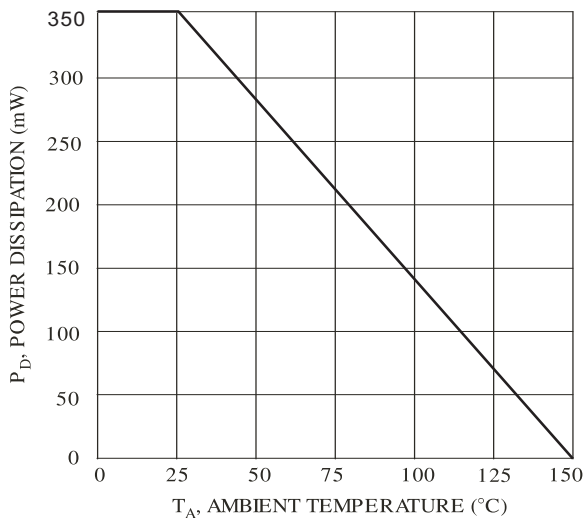


Fig. 1 Power Derating Curve, Total Package

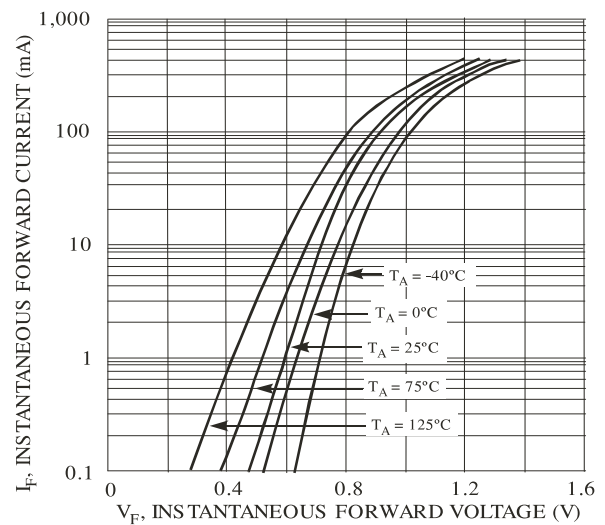


Fig. 2 Typical Forward Characteristics, Per Element

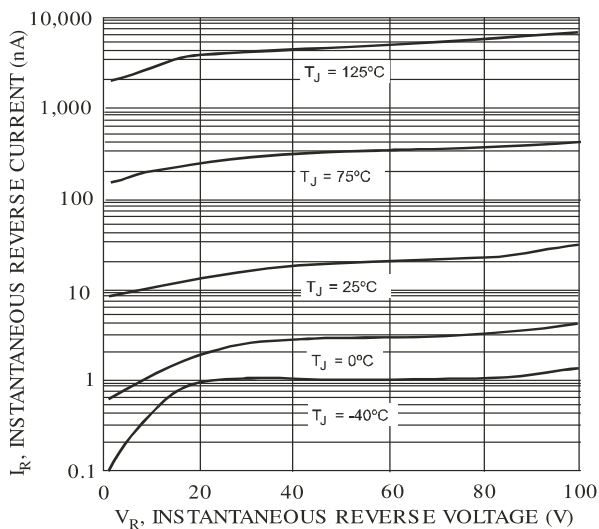


Fig. 3 Typical Reverse Characteristics, Per Element

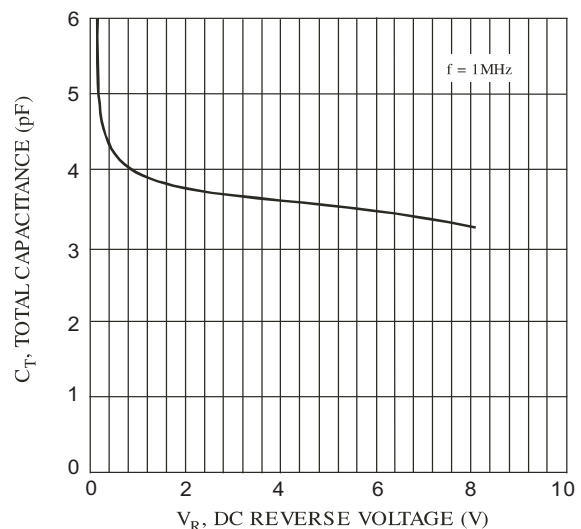



Fig. 4 Total Capacitance vs. Reverse Voltage, Per Element

MMBD4448W6

MOUNTING PAD LAYOUT

SOT-23 6L

Unit : inch(mm)

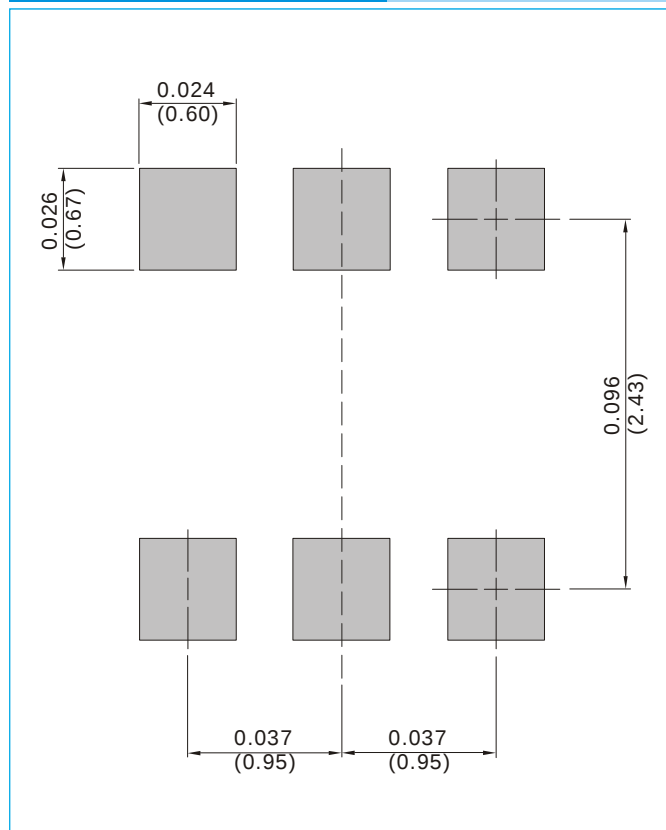

ORDER INFORMATION

- Packing information
T/R - 10K per 13" plastic Reel
T/R - 3K per 7" plastic Reel

MMBD4448W6

Part No_packing code_Version

MMBD4448W6_R1_00001
MMBD4448W6_R2_00001
MMBD4448W6_S1_00001
MMBD4448W6_S2_00001

For example :

RB500V-40_R2_00001

Part No.

Serial number

Version code means HF

Packing size code means 13"

Packing type means T/R

Packing Code XX				Version Code XXXXX		
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	B	13"	2			
Tube Packing (T/P)	T	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			



MMBD4448W6

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.