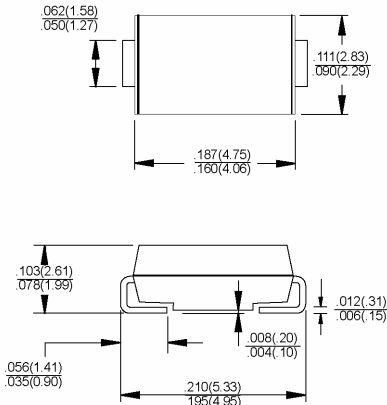


TSC 	1SMA6V8 THRU 1SMA200 Surface Mount Glass Passivated Zener Diode		
		Voltage Range 6.2 to 200 Volts 1.3 Watts Peak Power	
Features ✧ For surface mounted applications in order to optimize board space ✧ Low profile package ✧ Glass passivated junction ✧ Low inductance ✧ High temperature soldering guaranteed: 260°C / 10 seconds at terminals ✧ Plastic package has Underwriters Laboratory Flammability Classification 94V-0		SMA/DO-214AC  Dimensions in inches and (millimeters)	
Mechanical Data ✧ Case: Molded plastic over passivated junction ✧ Terminals: Solder plated solderable per MIL-STD-750, Method 2025 ✧ Polarity:Color Band denotes positive end (cathode) ✧ Standard packaging: 4 mm tape (EIA-481) ✧ Weight: 0.002 ounces, 0.064 gram			
Maximum Ratings and Electrical Characteristics			
Rating at 25°C ambient temperature unless otherwise specified.			
Type Number	Symbol	Value	Units
Peak Power Dissipation at $T_A=25^{\circ}\text{C}$, $R_{\theta JA}=100^{\circ}\text{C/W}$	P_{tot}	1.3	Watts
Peak Power Dissipation at $T_A=25^{\circ}\text{C}$, $R_{\theta JA}=25^{\circ}\text{C/W}$	P_{tot}	3.25	Watts
Max. Forward Voltage Drop @ $I_F=0.5\text{A}$	V_F	1.0	V
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to + 175	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS

(TA=25 °C unless otherwise noted) VF=1.0V max, IF=0.5A for all types.

Device (Note 1)	Device Marking Code	Zener (1) Voltage Rabge Vz @ Izt	Maximum Zener Impedance Z _{ZT} @ I _{ZT}	T _{typical} Temperature Coefficient @ I _{ZT}	Test Current I _{ZT}	Max Reverse Leakage Current IR @ VR		Max. Regulator Current @ 45°C I _{ZM}
		(V)	Ohms	(% / °C)	mA	uA	Volts	(mA)
1SMA6V8	EE	6.4-7.2	3	+0.035	100	5.0	4.0	147
1SMA7V5	ED	7.0-7.9	3	+0.035	100	5.0	5.0	133
1SMA8V2	EF	7.7-8.7	4	+0.055	100	5.0	6.0	122
1SMA9V1	EG	8.5-9.6	4	+0.055	50	5.0	7.0	110
1SMA10	EH	9.4-10.6	4	+0.070	50	1.0	7.5	105
1SMA11	EK	10.4-11.6	7	+0.075	50	1.0	8.2	97
1SMA12	EL	11.4-12.7	7	+0.075	50	1.0	9.1	88
1SMA13	EM	12.4-14.1	10	+0.075	50	1.0	10	79
1SMA15	EN	13.8-15.8	10	+0.075	50	1.0	11	71
1SMA16	EP	15.3-17.1	15	+0.085	25	1.0	12	66
1SMA18	EQ	16.8-19.1	15	+0.085	25	1.0	13	62
1SMA20	ER	18.2-21.2	15	+0.085	25	1.0	15	56
1SMA22	ES	20.8-23.3	15	+0.085	25	1.0	16	52
1SMA24	ET	22.8-25.6	15	+0.085	25	1.0	18	47
1SMA27	EU	25.1-28.9	15	+0.085	25	1.0	20	41
1SMA30	EV	28-32	15	+0.085	25	1.0	22	36
1SMA33	EW	31-35	15	+0.085	25	1.0	24	33
1SMA36	EX	34-38	40	+0.085	10	1.0	27	30
1SMA39	EY	37-41	40	+0.085	10	1.0	30	28
1SMA43	EZ	40-46	45	+0.095	10	1.0	33	26
1SMA47	FD	44-50	45	+0.095	10	1.0	36	23
1SMA51	FF	48-54	60	+0.095	10	1.0	39	21
1SMA56	FG	52-60	60	+0.095	10	1.0	43	19
1SMA62	FH	58-66	80	+0.105	10	1.0	47	16
1SMA68	FK	64-72	80	+0.105	10	1.0	51	15
1SMA75	FL	70-80	100	+0.105	10	1.0	56	14
1SMA82	FM	77-87	100	+0.105	10	1.0	62	12
1SMA91	NF	85-96	200	+0.110	5.0	1.0	68	10
1SMA100	FP	94-106	200	+0.110	5.0	1.0	75	9.4
1SMA110	FQ	104-116	250	+0.110	5.0	1.0	82	8.6
1SMA120	FR	114-127	250	+0.110	5.0	1.0	91	7.8
1SMA130	FS	124-141	300	+0.110	5.0	1.0	100	7.0
1SMA150	FT	138-156	300	+0.110	5.0	1.0	110	6.4
1SMA160	FU	153-171	350	+0.110	5.0	1.0	120	5.8
1SMA180	FV	168-191	400	+0.110	5.0	1.0	130	5.2
1SMA200	FW	188-212	500	+0.110	5.0	1.0	150	4.7

Note: 1: Tested with Pulses.

Pulse test: tp ≤ 50ms, δ < 2%.

RATINGS AND CHARACTERISTIC CURVES (1SMA6V8 THRU 1SMA200)

FIG.1- MAXIMUM CONTINUOUS POWER DISSIPATION

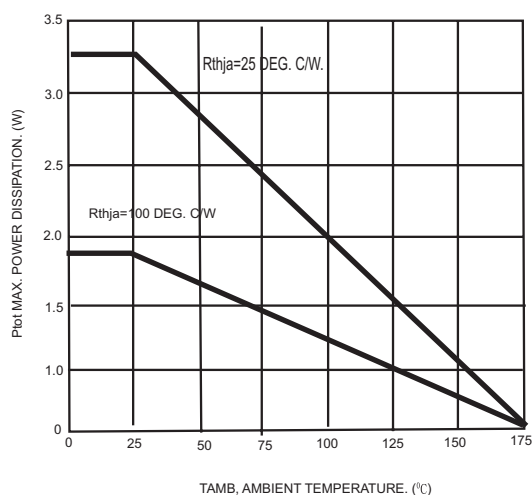


FIG.2- TYPICAL FORWARD CHARACTERISTIC

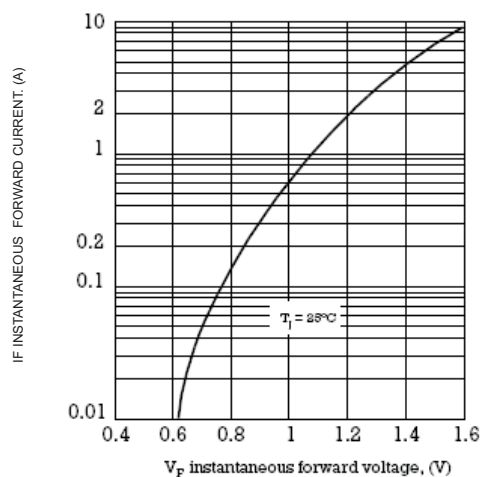


FIG.3- TYPICAL ZENER IMPEDANCE

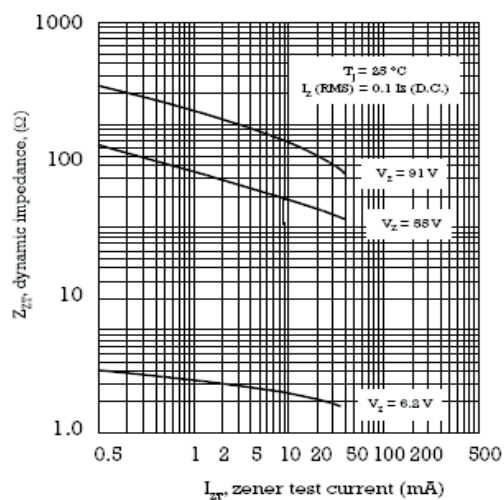


FIG.4- TYPICAL REVERSE CHARACTERISTIC

