
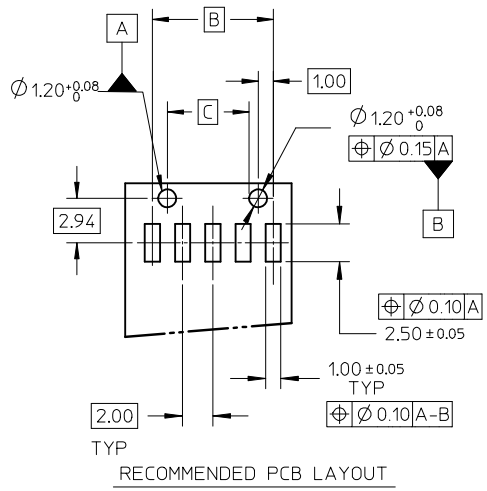


10		9			8		7		6		5		4		3		2		1	
CKT SIZE	DIMENSION									PART NO. IN TAPE & REEL PACKAGING	CKT # SIZE	PART NO. IN TRAY PACKAGING	KAPTON TAPE	PEG	PLATING OPTION	VOID POSITION	DIMENSION			
	A	B	C														F	MATING END	SOLDER TAIL	
03	5.90	4.00	-									-	Y	N	1	----	8.00	3.20	2.80	
05	9.90	8.00	6.00									-	Y	N	1	----	8.00	3.20	2.80	
07	13.90	12.00	10.00									-	N	Y	1	----	8.00	3.20	2.80	
09	17.90	16.00	14.00									-	Y	N	1	----	8.00	3.20	2.80	
11	21.90	20.00	18.00									-	N	Y	1	----	8.00	3.20	2.80	
13	25.90	24.00	22.00									-	Y	N	1	----	8.97	4.17	2.80	
15	29.90	28.00	26.00									-	Y	N	1	----	8.97	4.17	2.80	
17	33.90	32.00	30.00									-	Y	N	1	----	8.97	4.17	2.80	
19	37.90	36.00	34.00									-	Y	N	1	----	8.97	4.17	2.80	

PART WITHOUT PEG CONFIGURATION

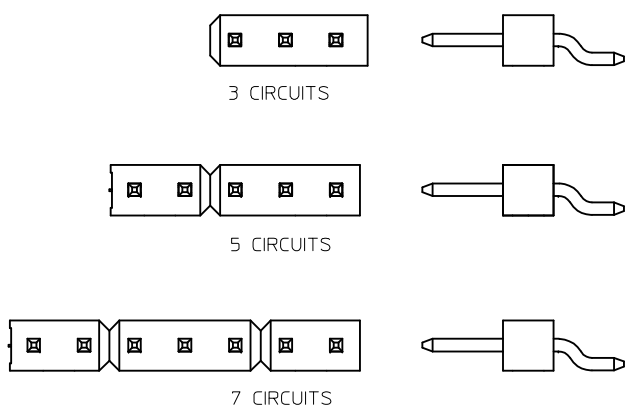


A	C	DESCRIPTION	REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION				
						MM ONLY		NTS	METRIC	◎ □				
						mm	INCH	DRAWN BY	DATE	TITLE				
						4 PLACES	± ---	± ---	CWLAM	2007/12/04	2MM SINGLE ROW HDR (ODD)			
						3 PLACES	± ---	± ---	CHECKED BY	DATE	SMT WITH PEG, BREAKAWAY			
						2 PLACES	± 0.2	± ---	KWLEE	2007/12/17				
						1 PLACE	± ---	± ---	APPROVED BY	DATE				
						ANGULAR ± 3 °		KWLEE	2007/12/17	molex MOLEX INCORPORATED				
						DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
								SEE TABLE		SD-87858-022		2 OF 3		
								SIZE A3 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
EWR:HSG MODIFICATION		EC NO: S2009-0295		2009/02/09		2009/02/10		2009/02/11						
DRAWN:ATSEE		CHKD:SKANG		APPR:MLONG										

10 9 8 7 6 5 4 3 2 1

CKT	DIMENSION					PACKABLE
	BoA	Ao	K2	F	W	QTY
5	11.20	8.50	4.40	11.50	24.00	1200
7	15.20	8.50	4.40	11.50	24.00	1200

TAPE AND REEL INFORMATION

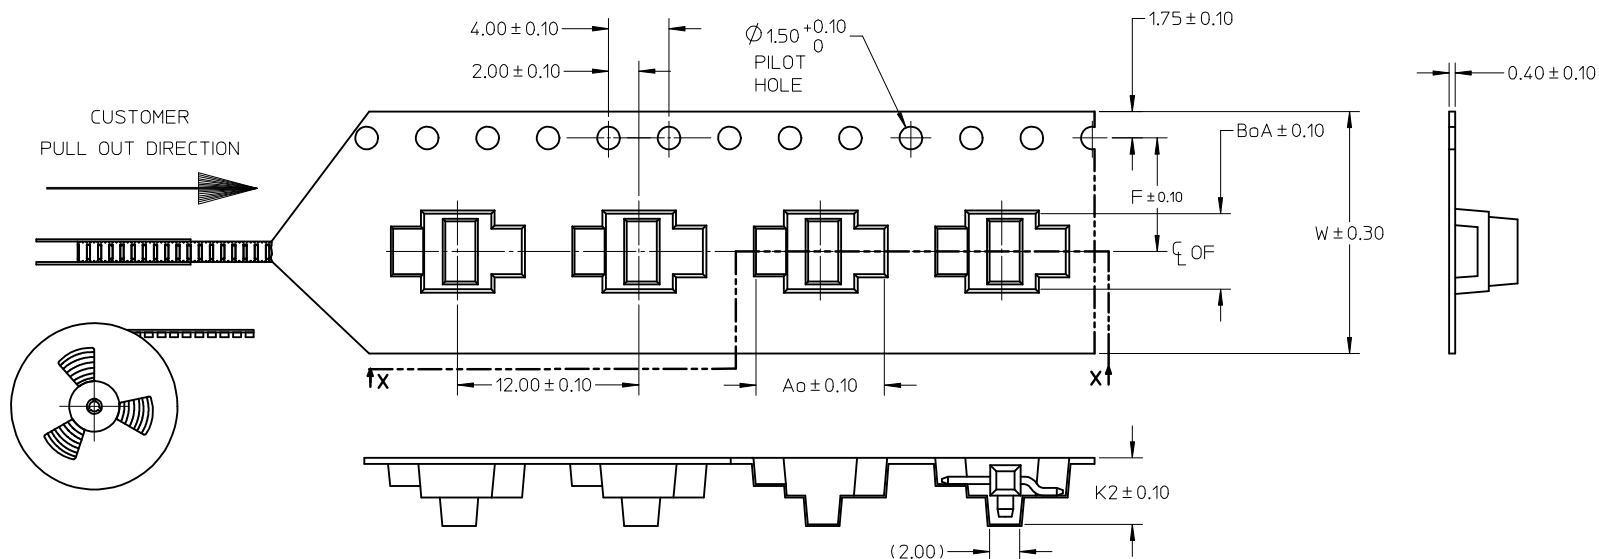


SECTION X-X


PART IN
TAPE & REEL
ORIENTATION
(FOR REF. ONLY)

NOTES:

1. LEADER AND TRAILER TAPE

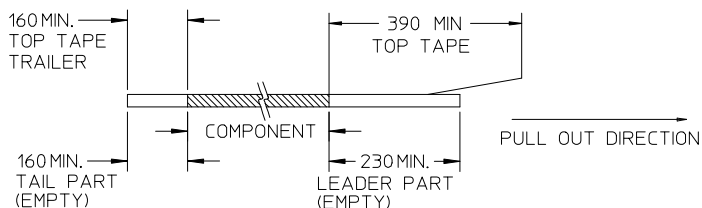

2. PEELING OFF FORCE OF THE TOP TAPE: 20-80gf. (PEELING DIRECTION AS SHOWN IN FOLLOWING FIGURE)



3. MATERIAL: BLACK P.S CONDUCTIVE

4. PACKAGING STANDARD IS AS PER EIA-481.

5. THE TAPE IS TREATED FOR ANTI-STATIC.

EWRHSG MODIFICATION EC NO: S2009-0295 DRWN:ATSEE 2009/02/09 CHKD:SKANG 2009/02/10 APPR:MLONG 2009/02/11	DESCRIPTION ▽=0 □=0	QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC		THIRD ANGLE PROJECTION		
				mm	INCH	DRAWN BY	DATE	TITLE 2MM SINGLE ROW HDR (ODD) SMT WITH PEG, BREAKAWAY					
		4 PLACES		± ---	± ---	CWLAM		2007/12/04					
		3 PLACES		± ---	± ---	CHECKED BY		DATE					
		2 PLACES		± 0.2	± ---	KWLEE		2007/12/17					
		1 PLACE		± ---	± ---	APPROVED BY		DATE					
						KWLEE		2007/12/17	MOLEX INCORPORATED				
						ANGULAR ± 3 °							
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				MATERIAL NO.		DOCUMENT NO.					SHEET NO.
				SEE TABLE		SD-87858-022					3 OF 3		
				SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

9 8 7 6 5 4 3 2 1