


REV	DOCUMENT	CHANGED BY	CHECK
10	0038225	PRS 04APR08	BLR

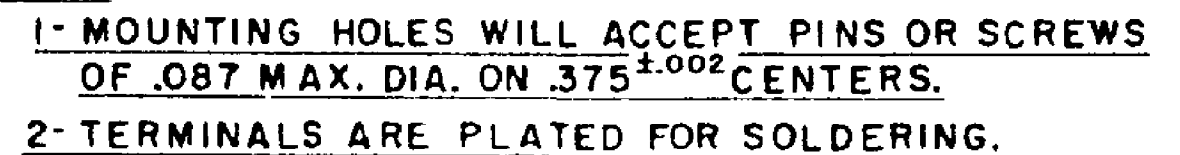

RELEASE NO.	SR - 7730
REPLACES	

CHARACTERISTICS		ELECTRICAL DATA				DESIGN UNITS: INCH				DRAWN	VK	25 OCT 07		Honeywell			
OPERATING FORCE – – – – 7 OZ MAX		CONTACT ARRANGEMENT S P D T				TOLERANCES UNLESS NOTED:				CHECK	RJ	25 OCT 07					
RELEASE FORCE – – – – 2 OZ MIN		30 VOLTS DC RATING				NO PLACE X ± -				THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC				
PRETRAVEL - - - - - .219 MAX		SEA LEVEL 50,000 FT				ONE PLACE .X ± 0.030											
DIFFERENTIAL TRAVEL – – – .025 MAX		INDUCTIVE 3 AMP 2.5 AMP		RESISTIVE 5 AMP 5 AMP		TWO PLACE .XX ± 0.015											
OVERTRAVEL – – – – – .030 MIN		MAXIMUM INRUSH 24 AMP				THREE PLACE .XXX ± 0.005				INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME		REV
APPROVALS		KEMA, CE	5A, 250V ~ T85 1E4				THIRD ANGLE PROJECTION		B				I	111SM2-T		10	
		UL, CSA	5A, 250 VAC ~														
										RASTER			SCALE -	WEIGHT .008 LB MAX	SHEET	1 OF 1	