

71922-YXXZLF

= STANDARD HOUSING COLOR GREY
(WITHOUT OPTIONAL LETTER)

S= SPECIFIC CUSTOMER PLATING OPTION
HOUSING COLOR GREY

- LATCHING

1= STANDARD LATCH

2= LOW PROFILE LATCH

1 - HOUSING MAT'L : GLASS FILLED
THERMOPLASTIC. UL94V-0

3 - PRODUCT PACKAGED IN TUBES

5 - TO DETERMINE DIMENSIONS :
N = NUMBER OF POSITIONS PER ROW
EXAMPLE : 8 POS $N \times 2.54 = 20.32\text{mm}$

7 - NO LEFT POLARIZATION ON POSITIONS 06, 08, 10, 14.

8 - NO GROOVE ON POSITIONS 06, 08, 10, 14, 30, 34

9 - 4.5mm SOLDER TAIL
ORDER 71922-4XX (WITH STANDARD LATCH ONLY)
ORDER 71922-5XX (WITH LOW PROFILE LATCH ONLY)

a - PLATING:

- "LF" MEANS THE PRODUCT IS LEAD-FREE, 2μm MINIMUM MATTE TIN OVER 1.27μm MINIMUM NICKEL UNDERPLATE.





b – MANUFACTURING PROCESS COMPATIBILITY

- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C ±5°C SOLDER BATH TEMPERATURE FOR 5 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm MIN THICK CIRCUIT BOARD.

c - LABELING:

- MEETS PACKAGING SPECS AS PER GS-14-920

d - LEGAL STATEMENT: SEE GS-47-0004.

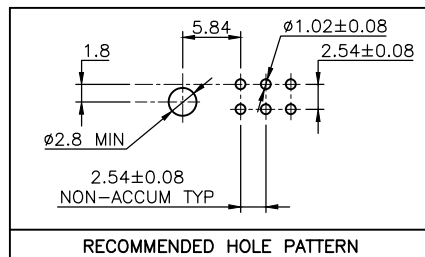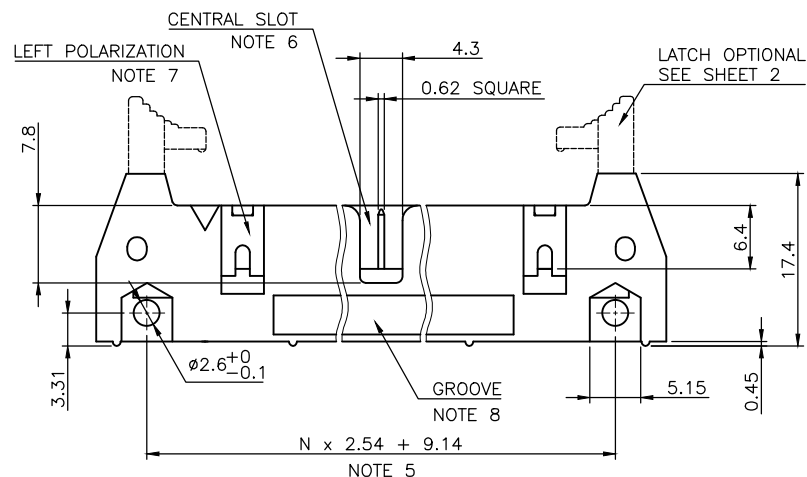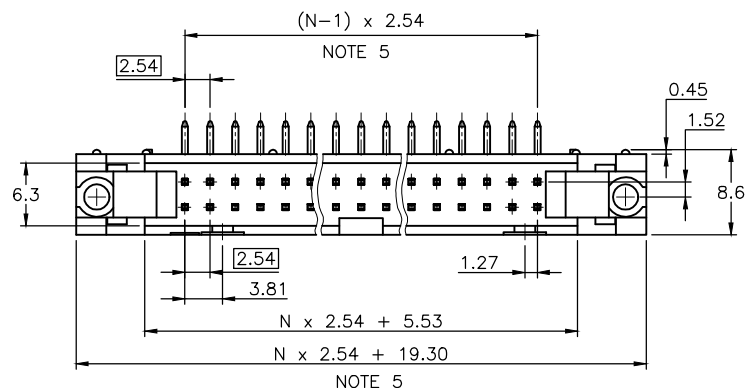

mat'l. code SEE NOTES				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family QUICKIE			
ltr ecn no dr date				tolerances unless otherwise specified				 mm scale 2:1		title SHR.EL.HEADER RA DR TMT			
V F10-0054 LMU 10.05.19				angles linear		XX ±0.3							
W B-16776 LMU 01.14.23						.XX ±0.13							
X B-18018 JCO 14.06.19						.XXX ±0.05							
Y B-18236 LMU 14.07.08				dr D.LE		01.01.24				dwg no sheet 1 of 2 size			
AA B-19092 LMU 14.10.16				enrg JM.C		01.01.24							
AB B-20349 BVE 15.03.02				chr JF.N		01.01.24				71922		A3	
				appd JM.C		01.01.24						type CUSTOMER Drawing	
sheet index		revision sheet		AB T		1 2							





FCIconnect.com

Copyright FCI

PRODUCT NUMBER	SIZE	LATCHING AVAILABILITY	MISSING PIN POSITIONS
71922-X06(B)LF	2x3	0/1/2	
71922-X08(B)LF	2x4	0/1/2	
71922-X10(B)LF	2x5	0/1/2	
71922-X14(B)LF	2x7	0/1/2	
71922-X16(B)LF	2x8	0/1/2	
71922-X18(B)LF	2x9	0/1/2	
71922-X20(B)LF	2x10	0/1/2	
71922-X26(B)LF	2x13	0/1/2	
71922-X28(B)LF	2x13	0/1/2	PIN 5 TO 12
71922-X30(B)LF	2x15	0/1/2	
71922-X34(B)LF	2x17	0/1/2	
71922-X35(B)LF	2x17	0/1/2	PIN 2 & 3
71922-X39(B)LF	2x20	0/1/2	PIN 20
71922-X40(B)LF	2x20	0/1/2	
71922-X44(B)LF	2x22	0/1/2	
71922-X50(B)LF	2x25	0/1/2	
71922-X60(B)LF	2x30	0/1/2	
71922-X64(B)LF	2x32	0/1/2	

PLATING :

- 0.76µm GOLD/GXT
(PdNi WITH GOLD FLASH) ON CONTACT AREA
- 2µm MIN MATTE TIN ON TAIL
- UNDERPLATE : 1.27µm Ni MIN

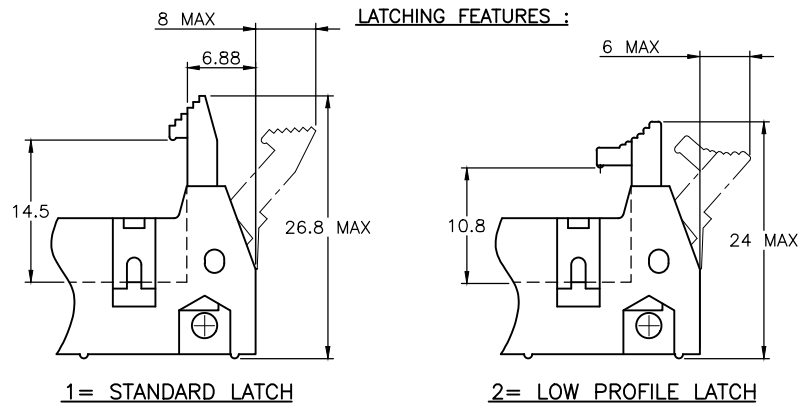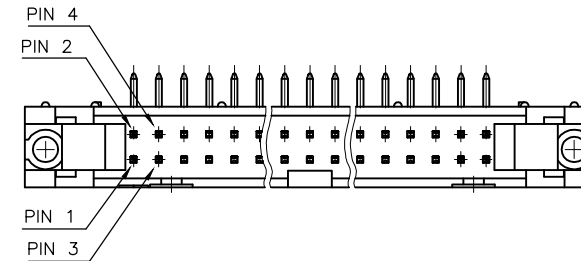

mat'l. code				surface ISO 1302 ✓ ISO 406 ISO 1101			projection mm		product family QUICKIE	
ltr	ecn no	dr	date	tolerances unless otherwise specified			title SHR.EL.HEADER RA DR TMT		sheet 2 of - size	
M	F06-0229	LMU	06.07.17	angles	linear		scale 2:1		71922 A3	
N	F07-0195	LMU	07.05.25				FCI		CUSTOMER Drawing	
P	F08-0146	YOV	08.04.11							
R	B-16776	LMU	14.01.23	dr	D.LE	01.01.24				
S	B-19092	LMU	14.10.16	enrg	JM.C	01.01.24				
T	B-20349	BVE	15.03.02	chr	JF.N	01.01.24				
				appd	JM.C	01.01.24				
sheet index	revision sheet									