



5

4

3





2

1

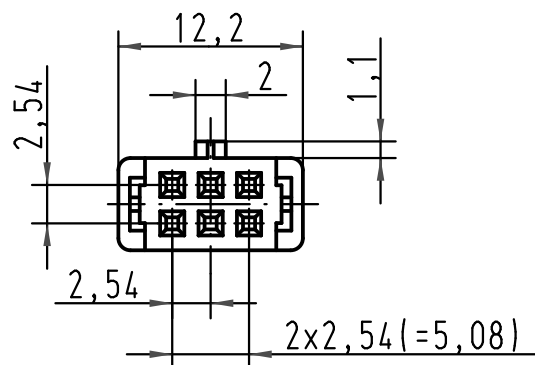

vorverrastet
pre assembled
preassemble

strain relief verrastet
fitted
assemble

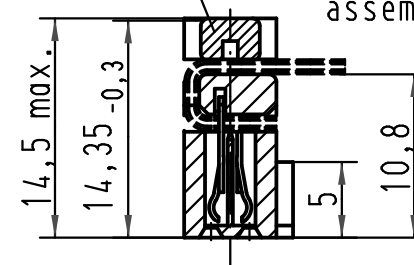

1) Markierung erster Kontakt, Ader 1 des Flachkabels
1) Contact no.1, 1st wire of flat cable
1) Contact no.1, repère 1 du câble

A

09 18 506 5813 58U	0,76 μm Au	Bulk packaging MOQ = 3000 pcs		All Dimensions in mm Original Size DIN A 4			Techn. Character.			Nicht tolerierte Maß/Free size tolerances			
09 18 506 6813 58U	2										SEK 18 Female connector 6 poles with central polarisation without cable stop with strain relief		
09 18 506 7813 58U	3												
09 18 506 5813	0,76 μm Au	N.A					Detail.	01-FEB-00	Th	Maßstab/Scale 2 : 1			
09 18 506 6813	2	N.A					Insp.	30-SEP-11	JB				
09 18 506 7813	3	N.A					Stand.						
Bestell-Nr. Part-No. Reference	Anforderungsstufe performance level Niveau de qualite	Index Designation	36265	30-SEP-11	BH	HARTING EURL F-95972 Paris				TB	0918506X813	Blatt/ page 1 1	
			26570	01-FEB-00	JB								
			Mod.	Dat.	Name								
										Sub.			