


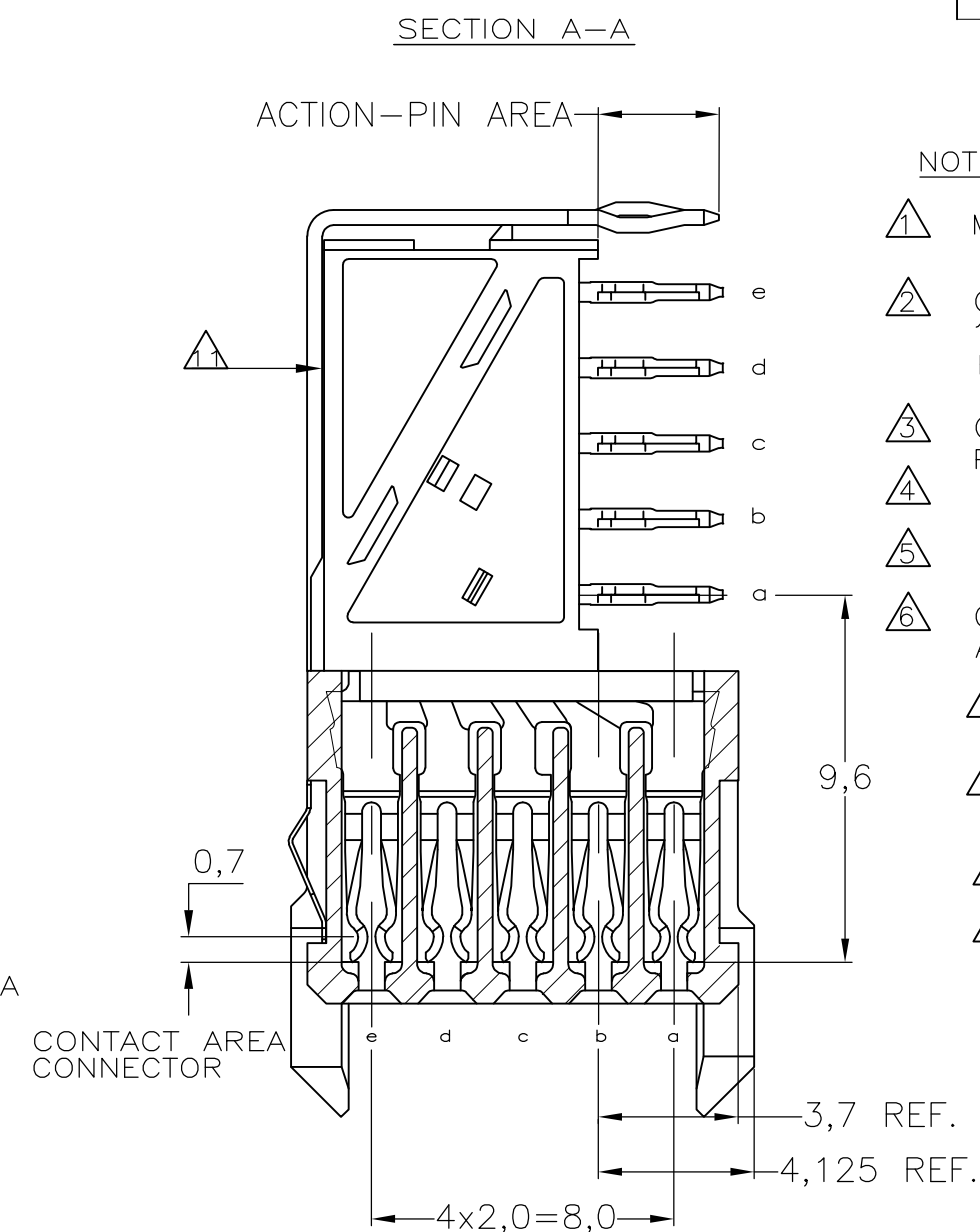

① MATERIAL CONTACTS; PHOSPHORBRONZE
MATERIAL HOUSING; GLASSFILLED POLYESTER (GRAY)

② GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT):
1,27μm NICKEL MIN. AND ACTION PIN: 0,5μm TIN-LEAD MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION
REFERENCE FOR EACH DASH NUMBER.

③ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 2.

④ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 1.

⑤ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA
GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.

⑥ CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE
APPROVED LUBRICANT.

⑧ ASSEMBLY PRINTED WITH P/N AND DATECODE
THE MARKING CAN APPEAR ON THE FRONT SIDE OR BACK SIDE.


⑨ HOLE PATTERN FOR FEMALE CONNECTOR TYPE A
110 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID

⑩ ROW "f" 13 PLATED THROUGH HOLES FOR UPPERSHIELD

⑪ SHIELD MOUNTED ON CONNECTOR WITH DOUBLE SIDED
ADHESIVE TAPE OR ADHESIVE

⑫ AREA RESERVED FOR KEYING PART (BASIC P.N. 100526)
13 BASIC P.N. LOWERSHIELD: 338108

REF. ⑭ 0.76μm MIN GOLD PLATING AT MATING SURFACES.

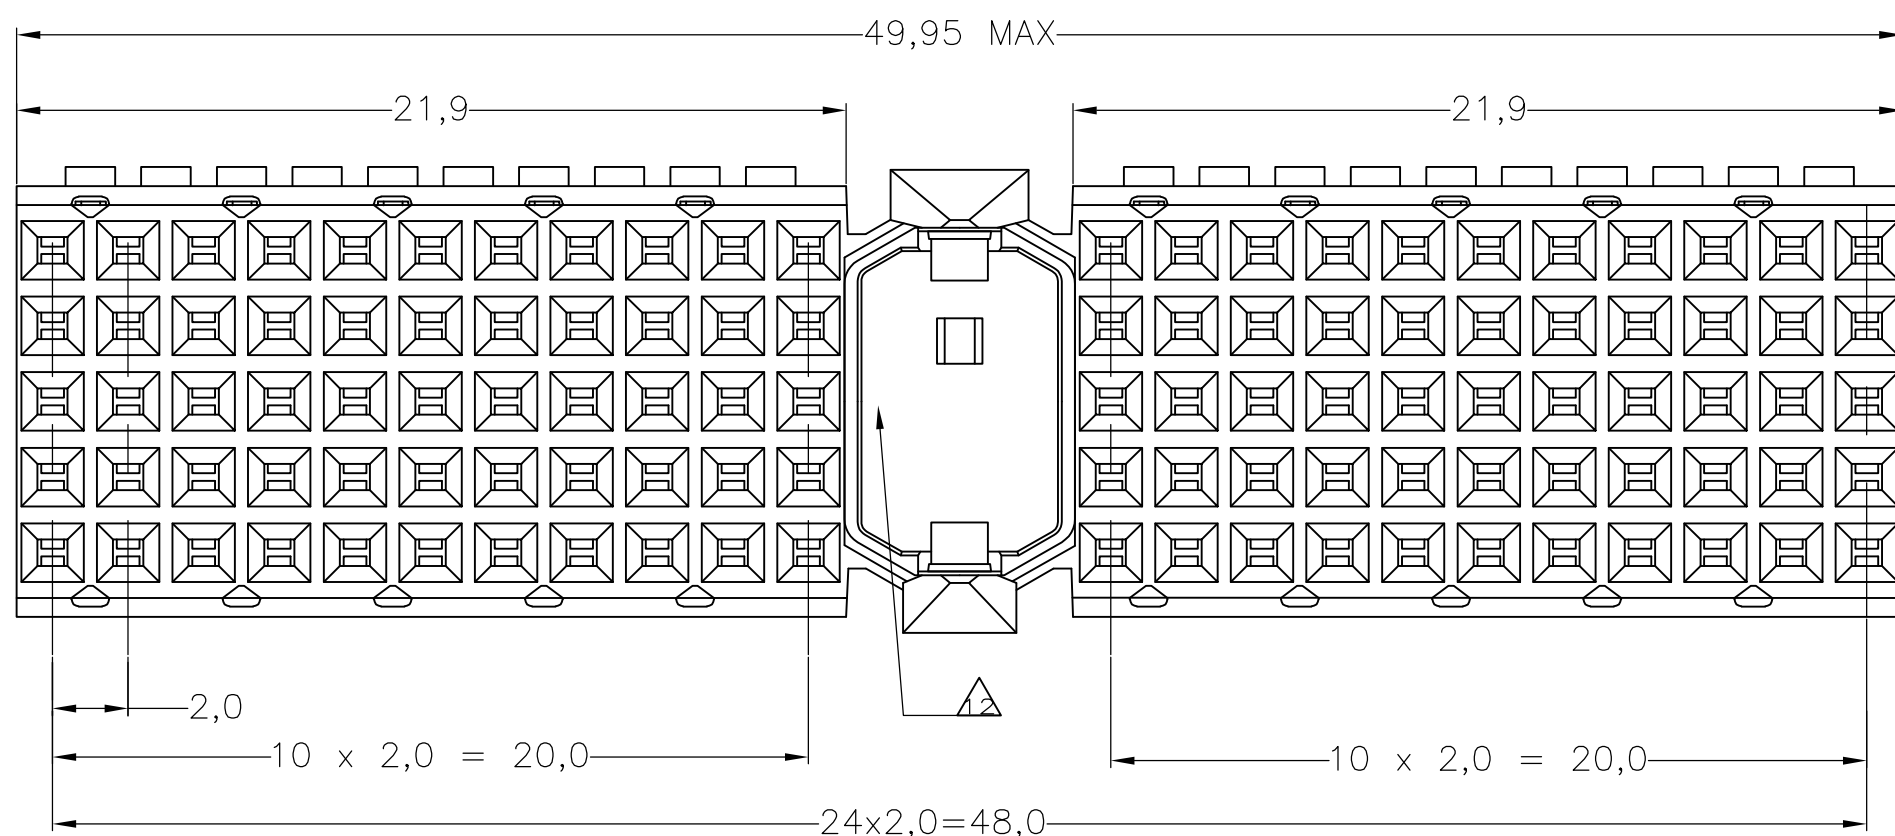

Technical drawing of a PCB layout showing dimensions and hole specifications. The drawing includes a grid of holes and various dimension lines with values in millimeters.

Dimensions:

- Overall width: $12 \times 4,0 = 48,0$
- Overall height: $10 \times 2,0 = 20,0$
- Internal width segments: $10 \times 2,0 = 20,0$ and $8,0$
- Internal height segments: $4 \times 2,0 = 8,0$
- Distance from edge to first hole row: $1,5$

Hole Specifications:

- Top row of holes: $\varnothing 1,0$
- Bottom row of holes: $\varnothing 0,05$
- Label: ALL HOLES

Other Labels:

- NS ACCORDING CompactPCI
- E CONNECTIVITY / AMP
- EDGE OF P.C.BOARD

OBSOLETE
OBSOLETE

			3-352068-0
E			— 352068-9 —
E			— 352068-4 —
			352068-1
	FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. TRUREN		20JAN97		 TE Connectivity	
		CHK —		—			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD —		NAME	
		0 PLC ± —		PRODUCT SPEC		Z-PACK 2MM HM TYPE A - 25 COLUMNS PRE-SHIELDED RECEPTACLE	
		1 PLC ± — ±0.2		108-19082			
		2 PLC ± —		APPLICATION SPEC			
		3 PLC ± —		114-19029			
4 PLC ± —		ANGLES		SIZE		CAGE CODE	DRAWING NO
MATERIAL		FINISH		WEIGHT		RESTRICTED TO	
—		—		0.000000		A2 00779 C-352068	
CUSTOMER DRAWING						SCALE	NTS
						SHEET	1 OF 1
						REV	N