

NUMBER C-177905


METRIC 三角表示 (3rd ANGLE PROJECTION)

METRIC




PRINTING DIMENSIONS IN MM. DO NOT SCALE PRINT

PRINT DIST

- 注:
1. 適用製品規格: 108-5410
 2. 適用コンタクト型式
リレー・コンタクト: 177915-C(*20-*16AWG)
177914-C(*26-*22AWG)
 3. 適合端子側製品型式
キャップ・ハウジング: 177913-C(パネル取付タイプ)
プラグ・コンタクト: 177917-C(*20-*16AWG)
177916-C(*26-*22AWG)
 4. 適用プレート型式: 177920-C
 5. 取扱説明書: 411-563B
- △ 表1参照

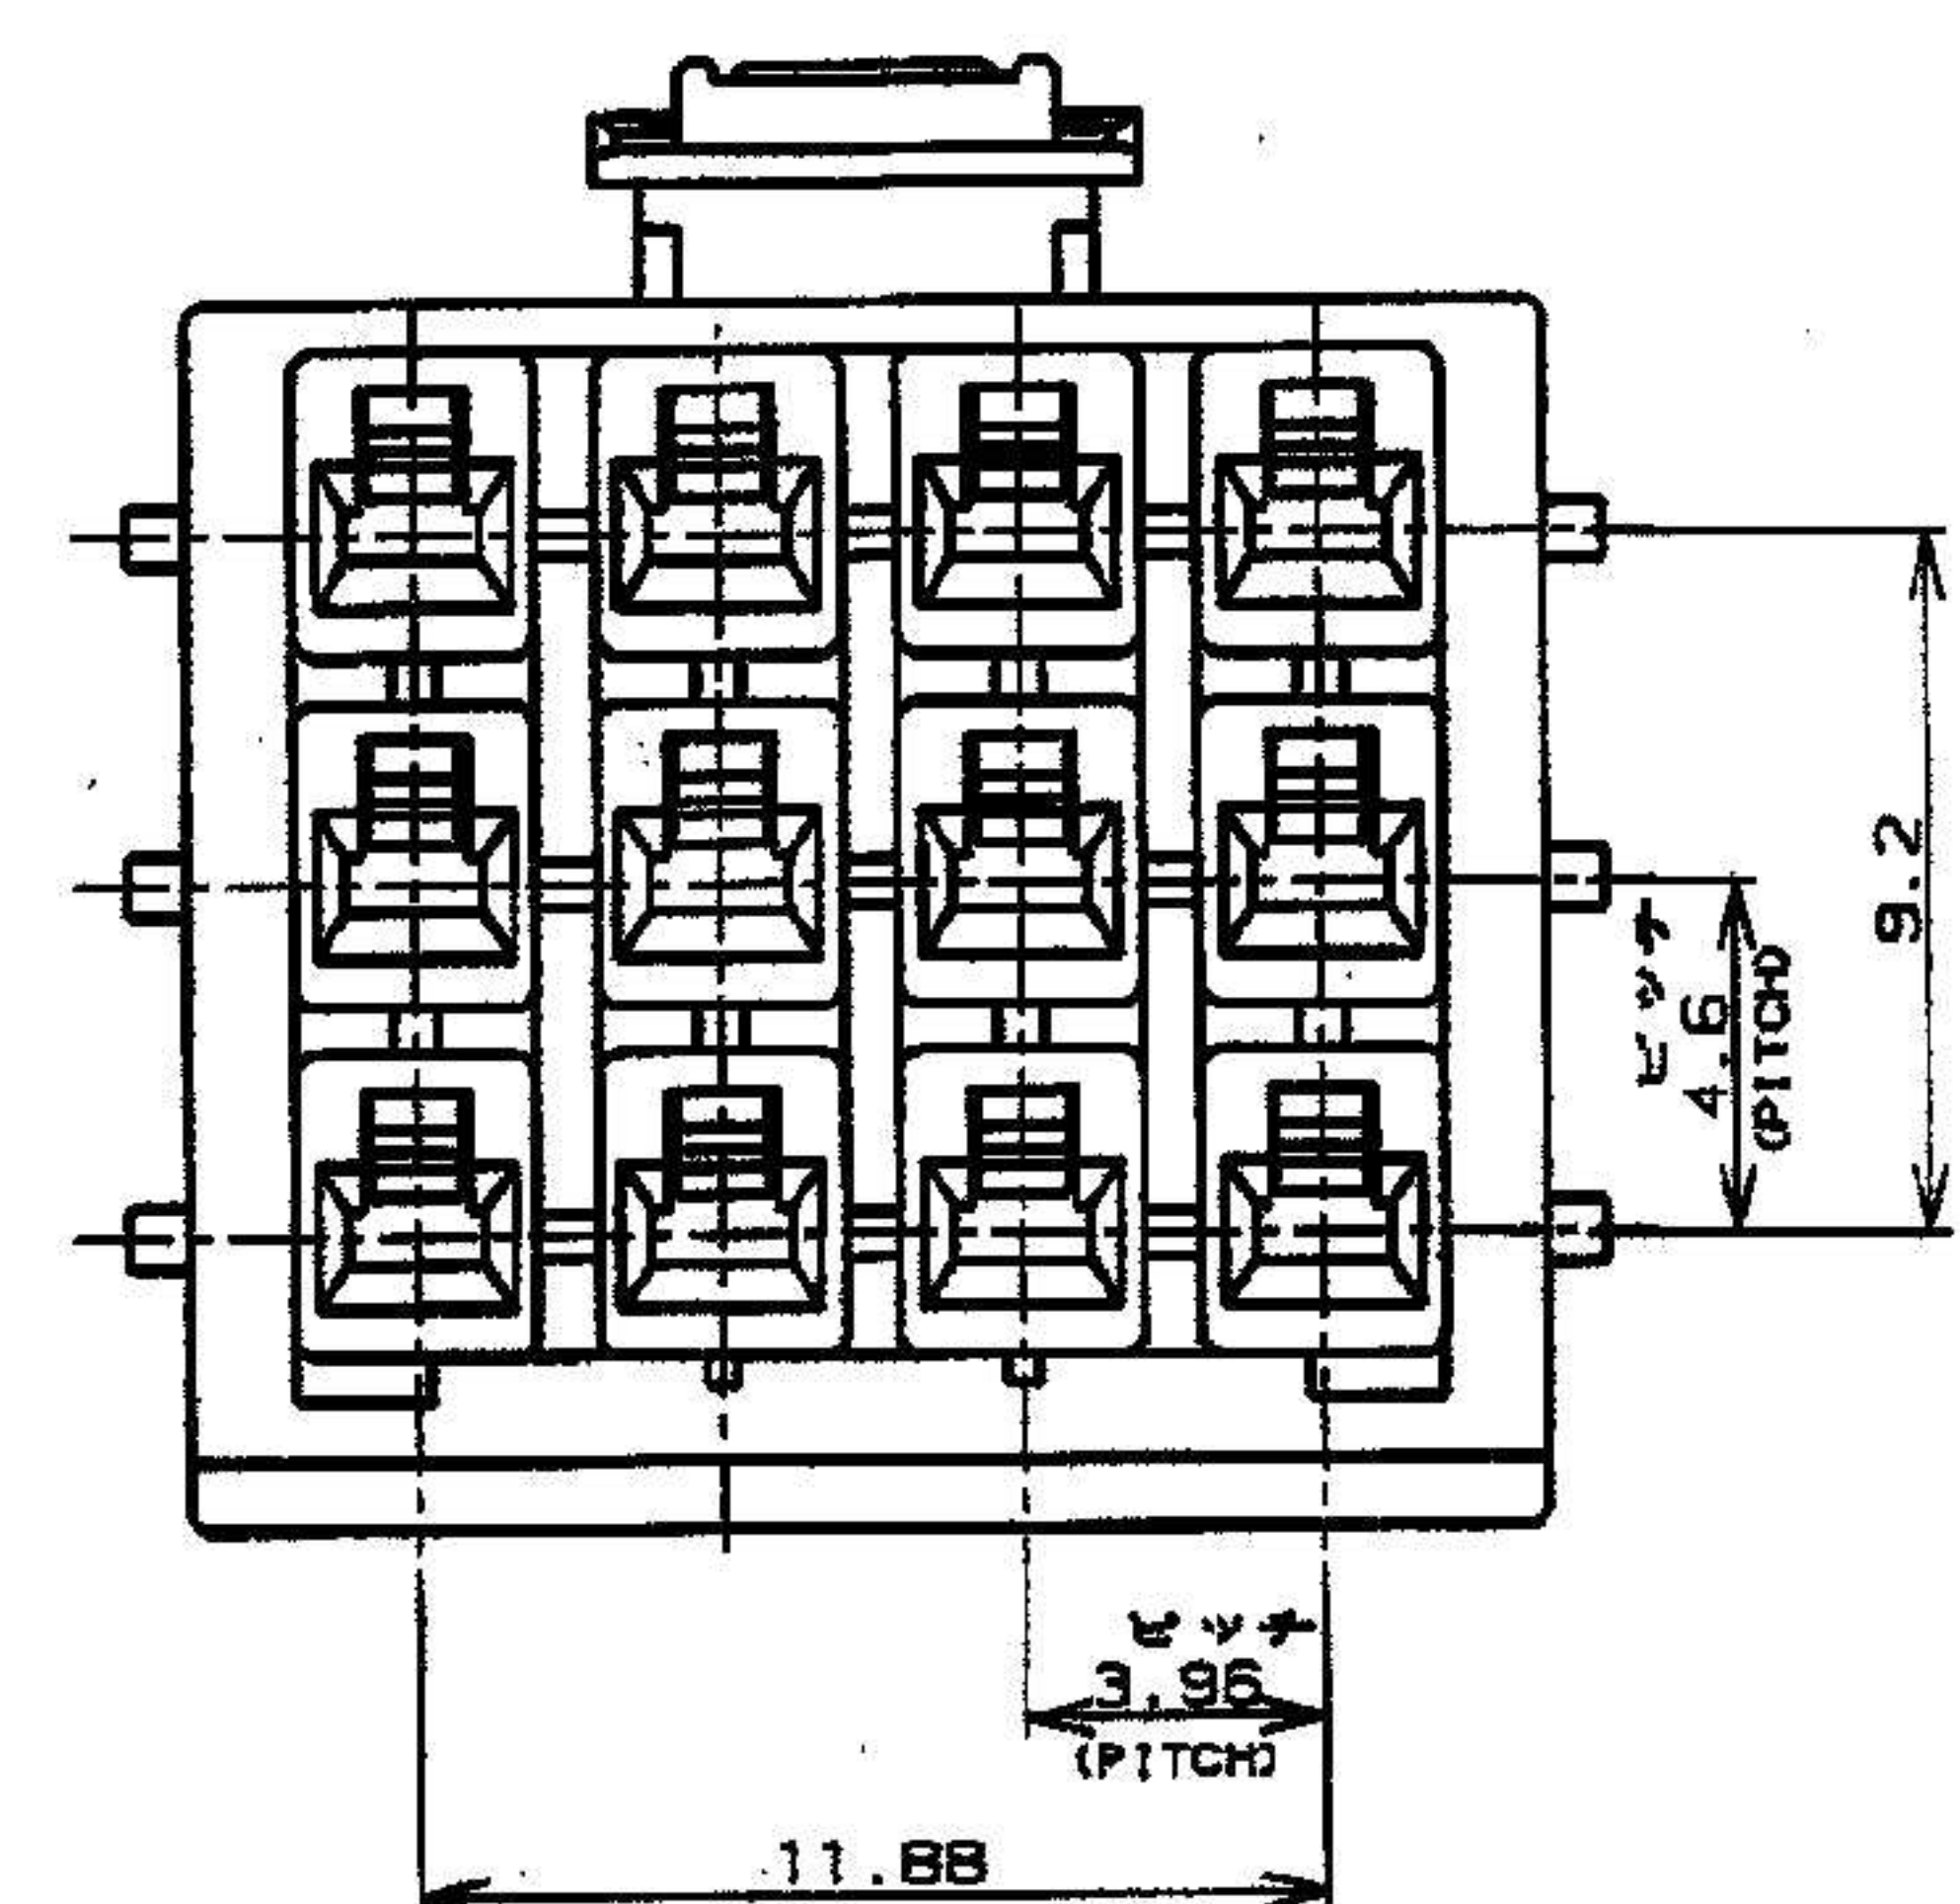

- NOTES
1. PRODUCT SPEC, 108-5410
 2. APPLICABLE CONTACT P/N
REC CONTACT: 177915-C(*20-*16AWG)
177914-C(*26-*22AWG)
 3. MATING CONN. P/N
CAP HSG: 177913-C (PANEL MOUNT)
TAB CONTACT: 177917-C(*20-*16AWG)
177916-C(*26-*22AWG)
 4. APPLICABLE PLATE P/N: 177920-C
 5. INSTRUCTION SHEET: 411-563B
- △ SEE TABLE 1

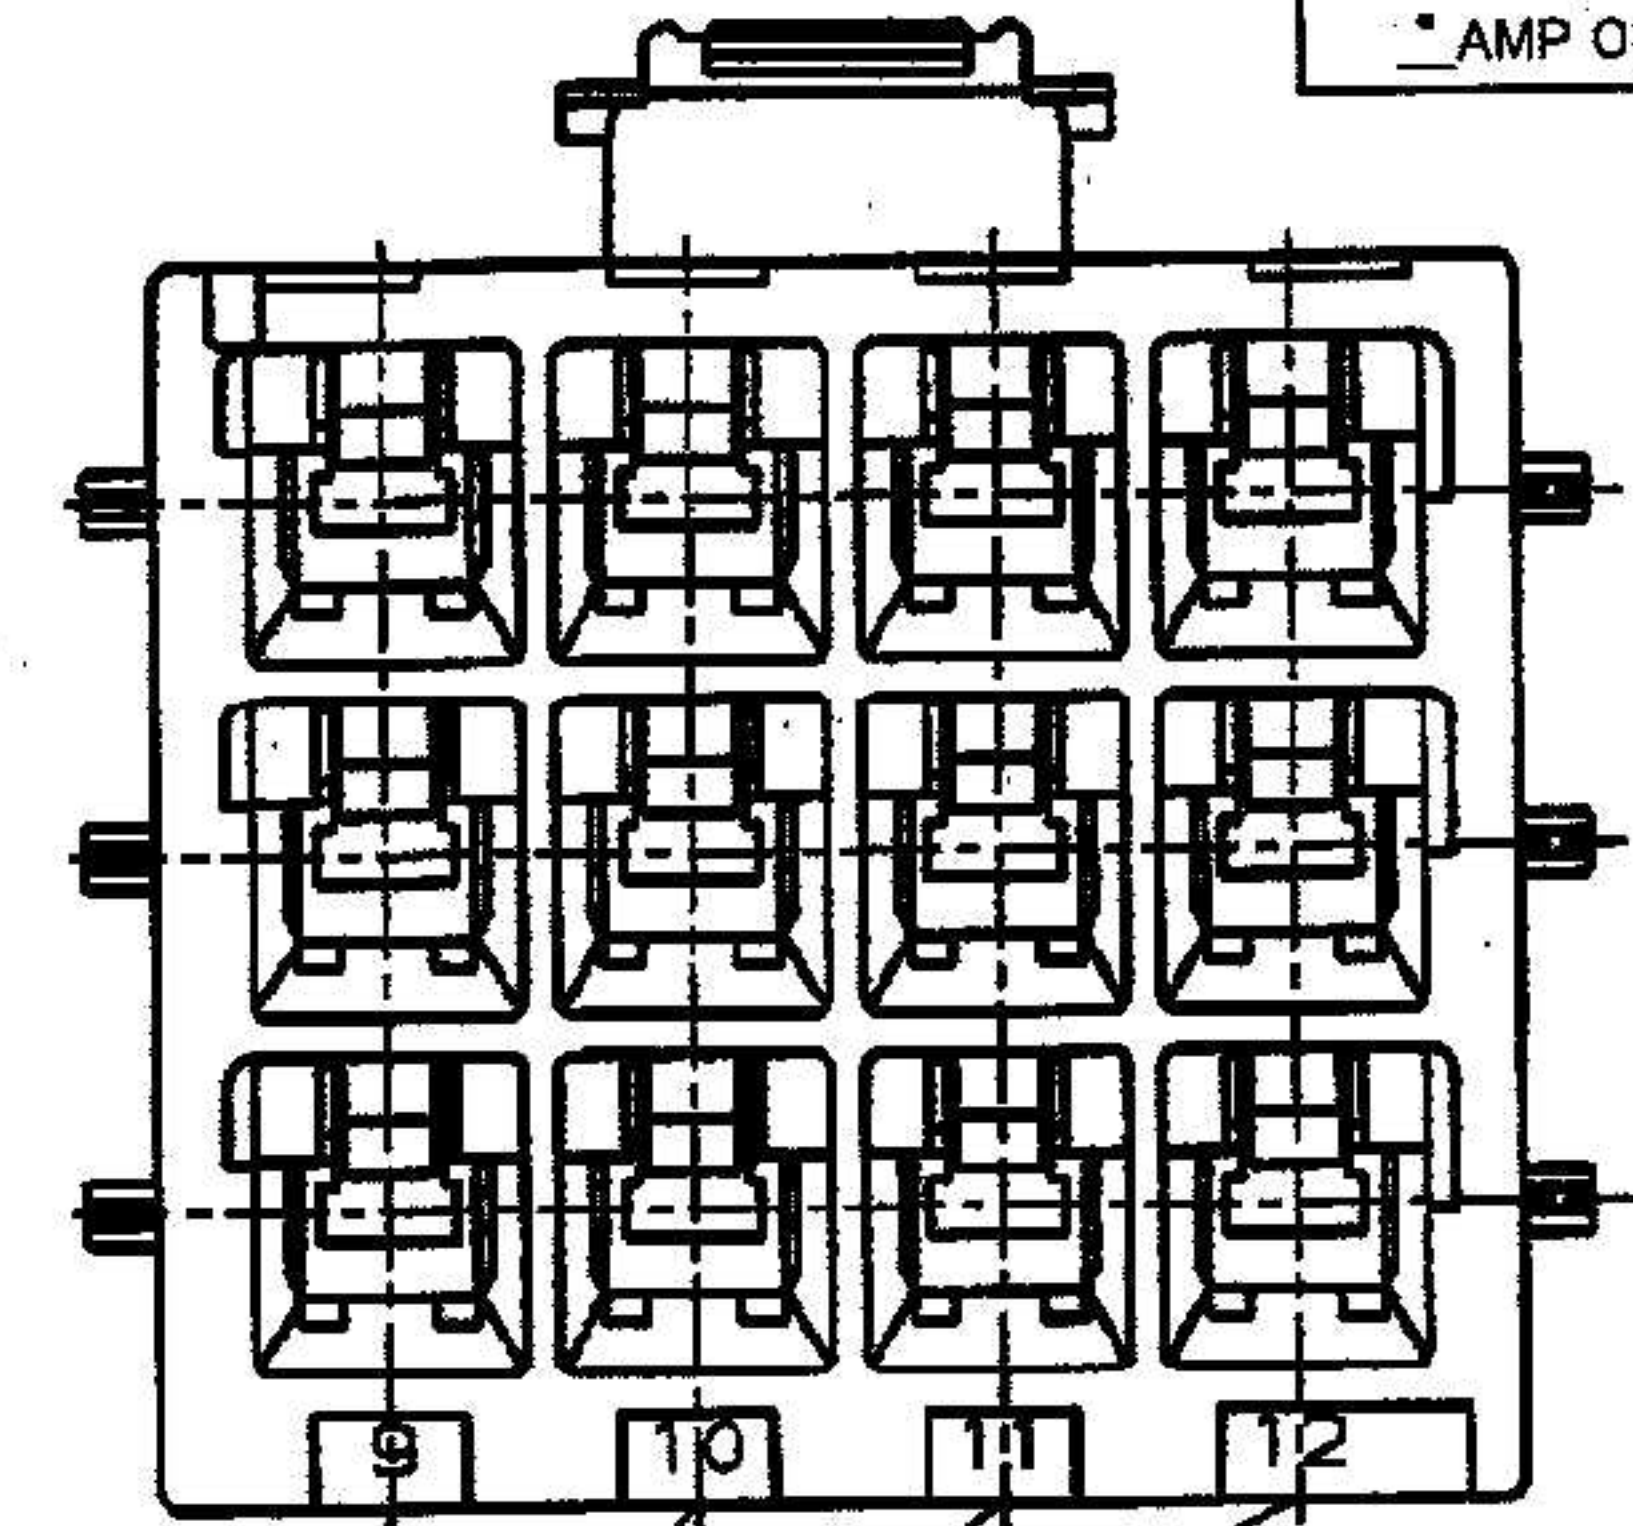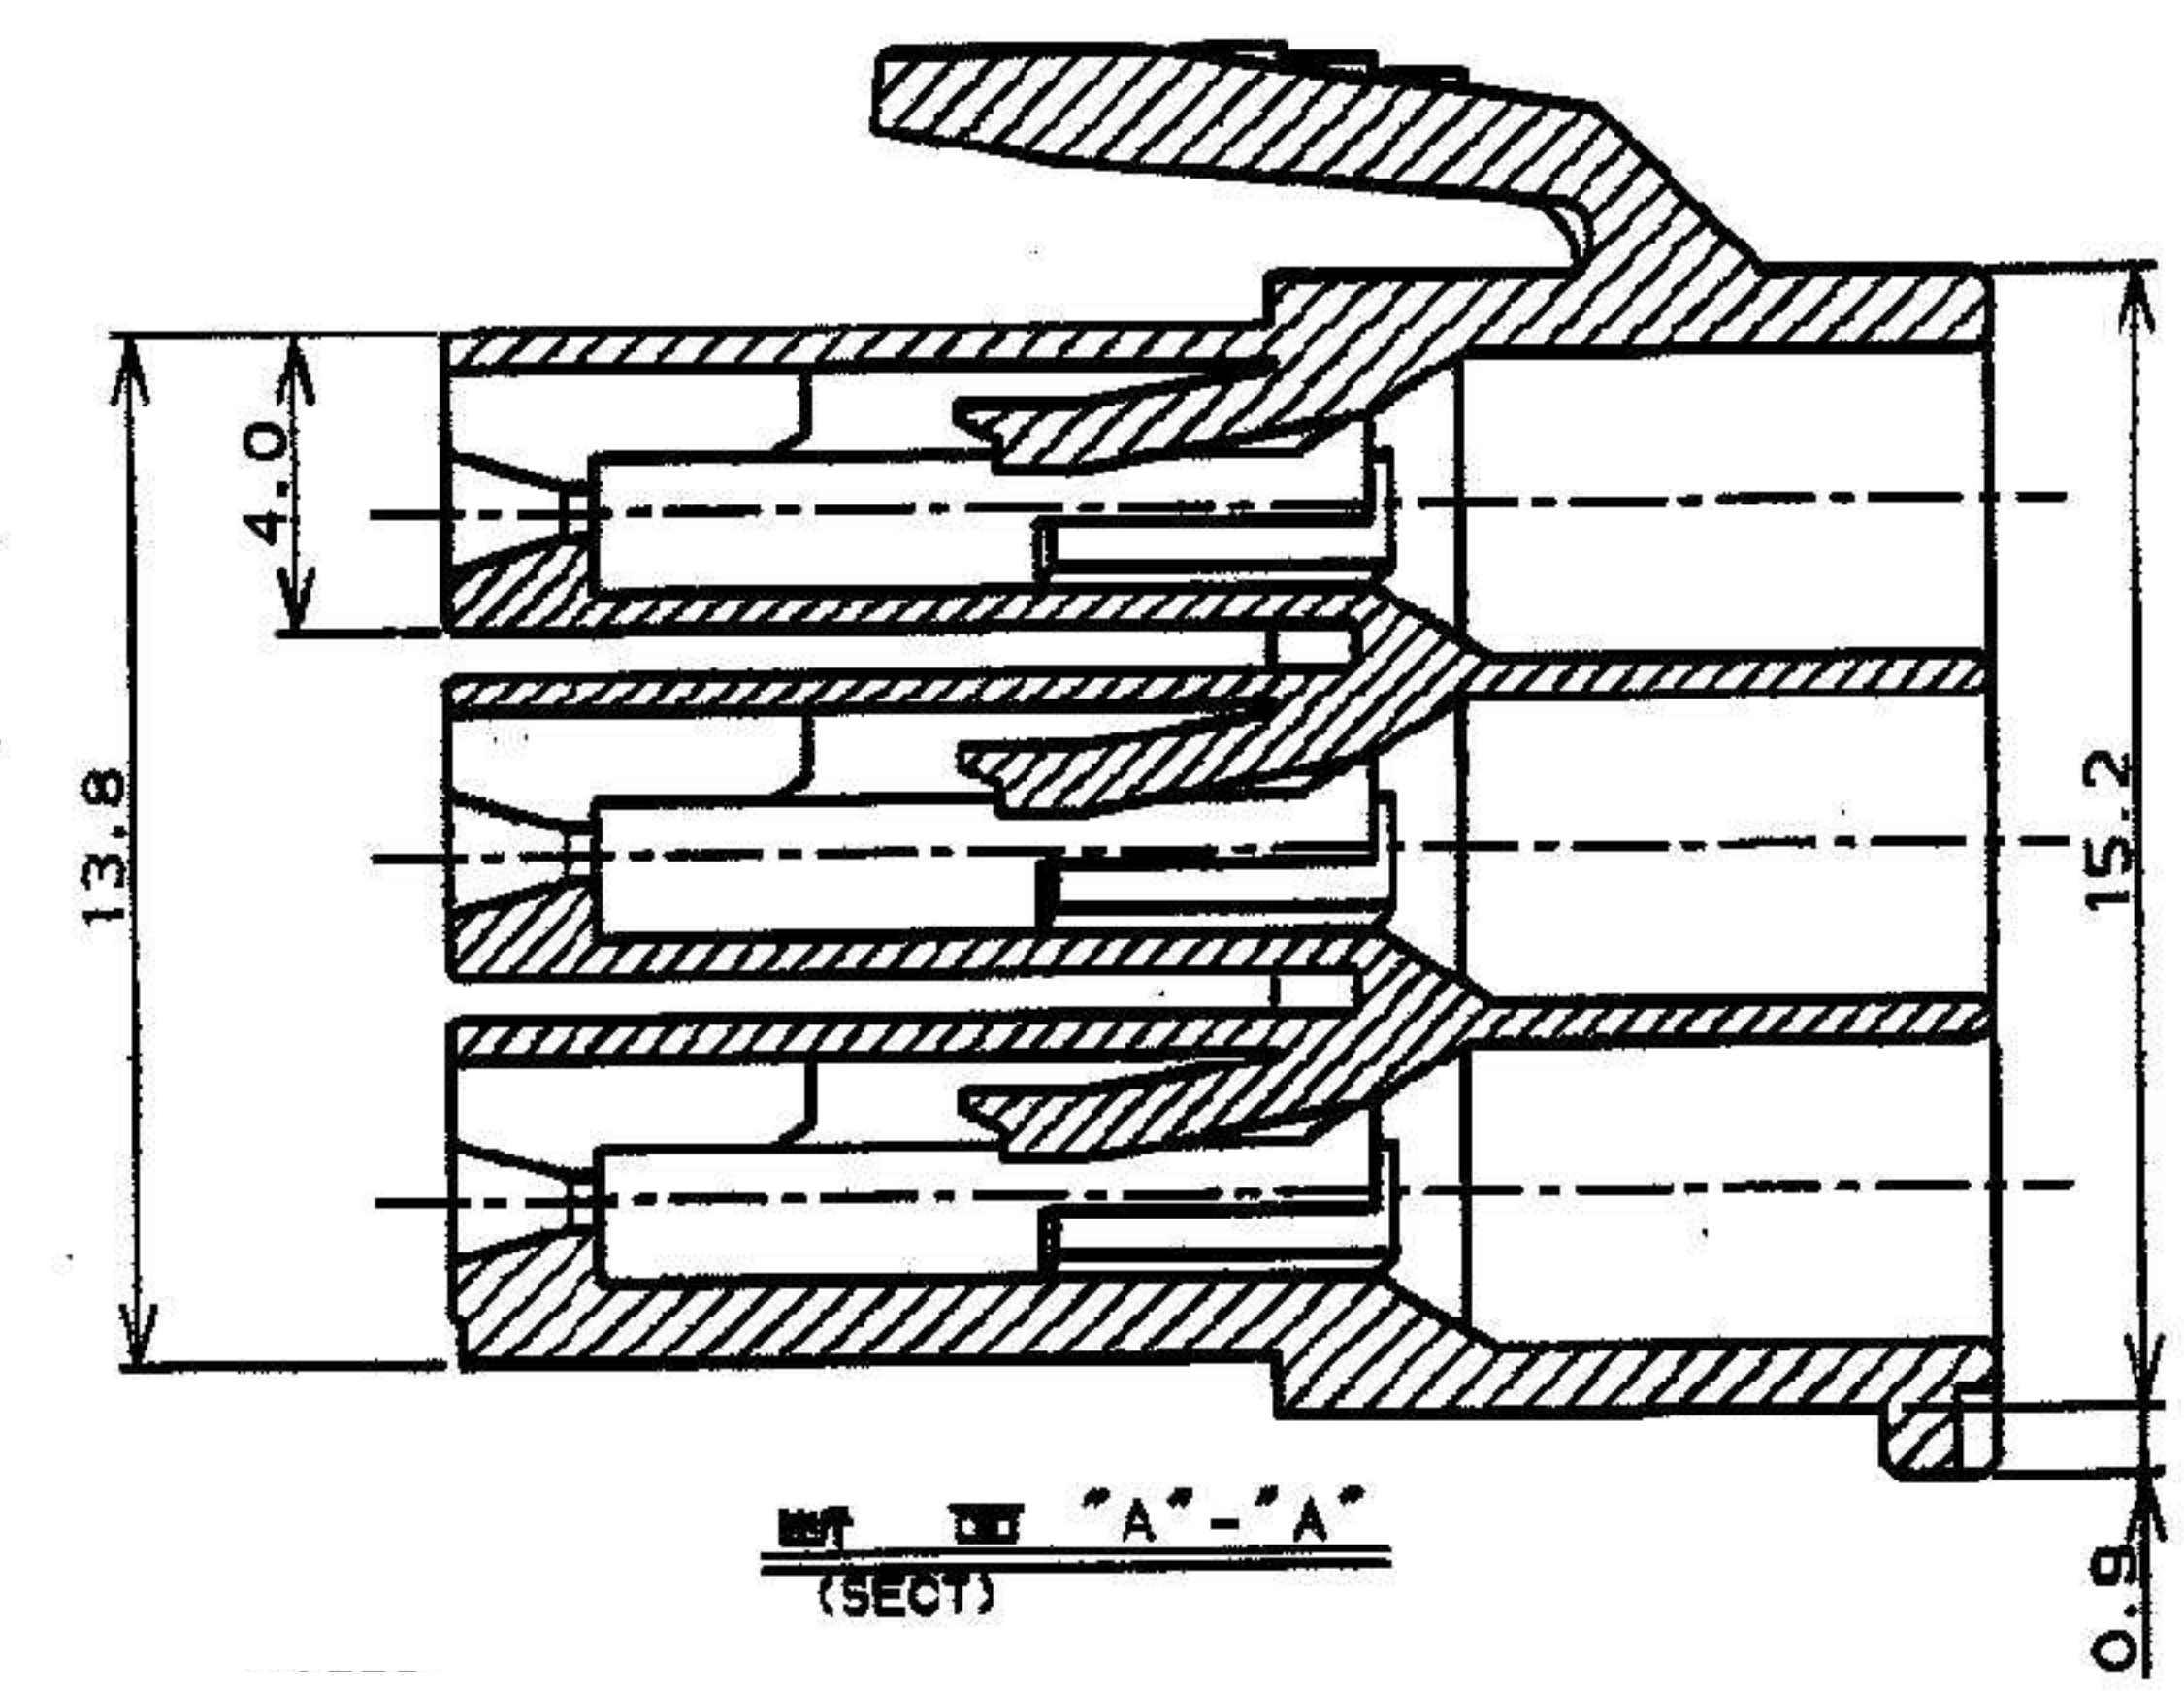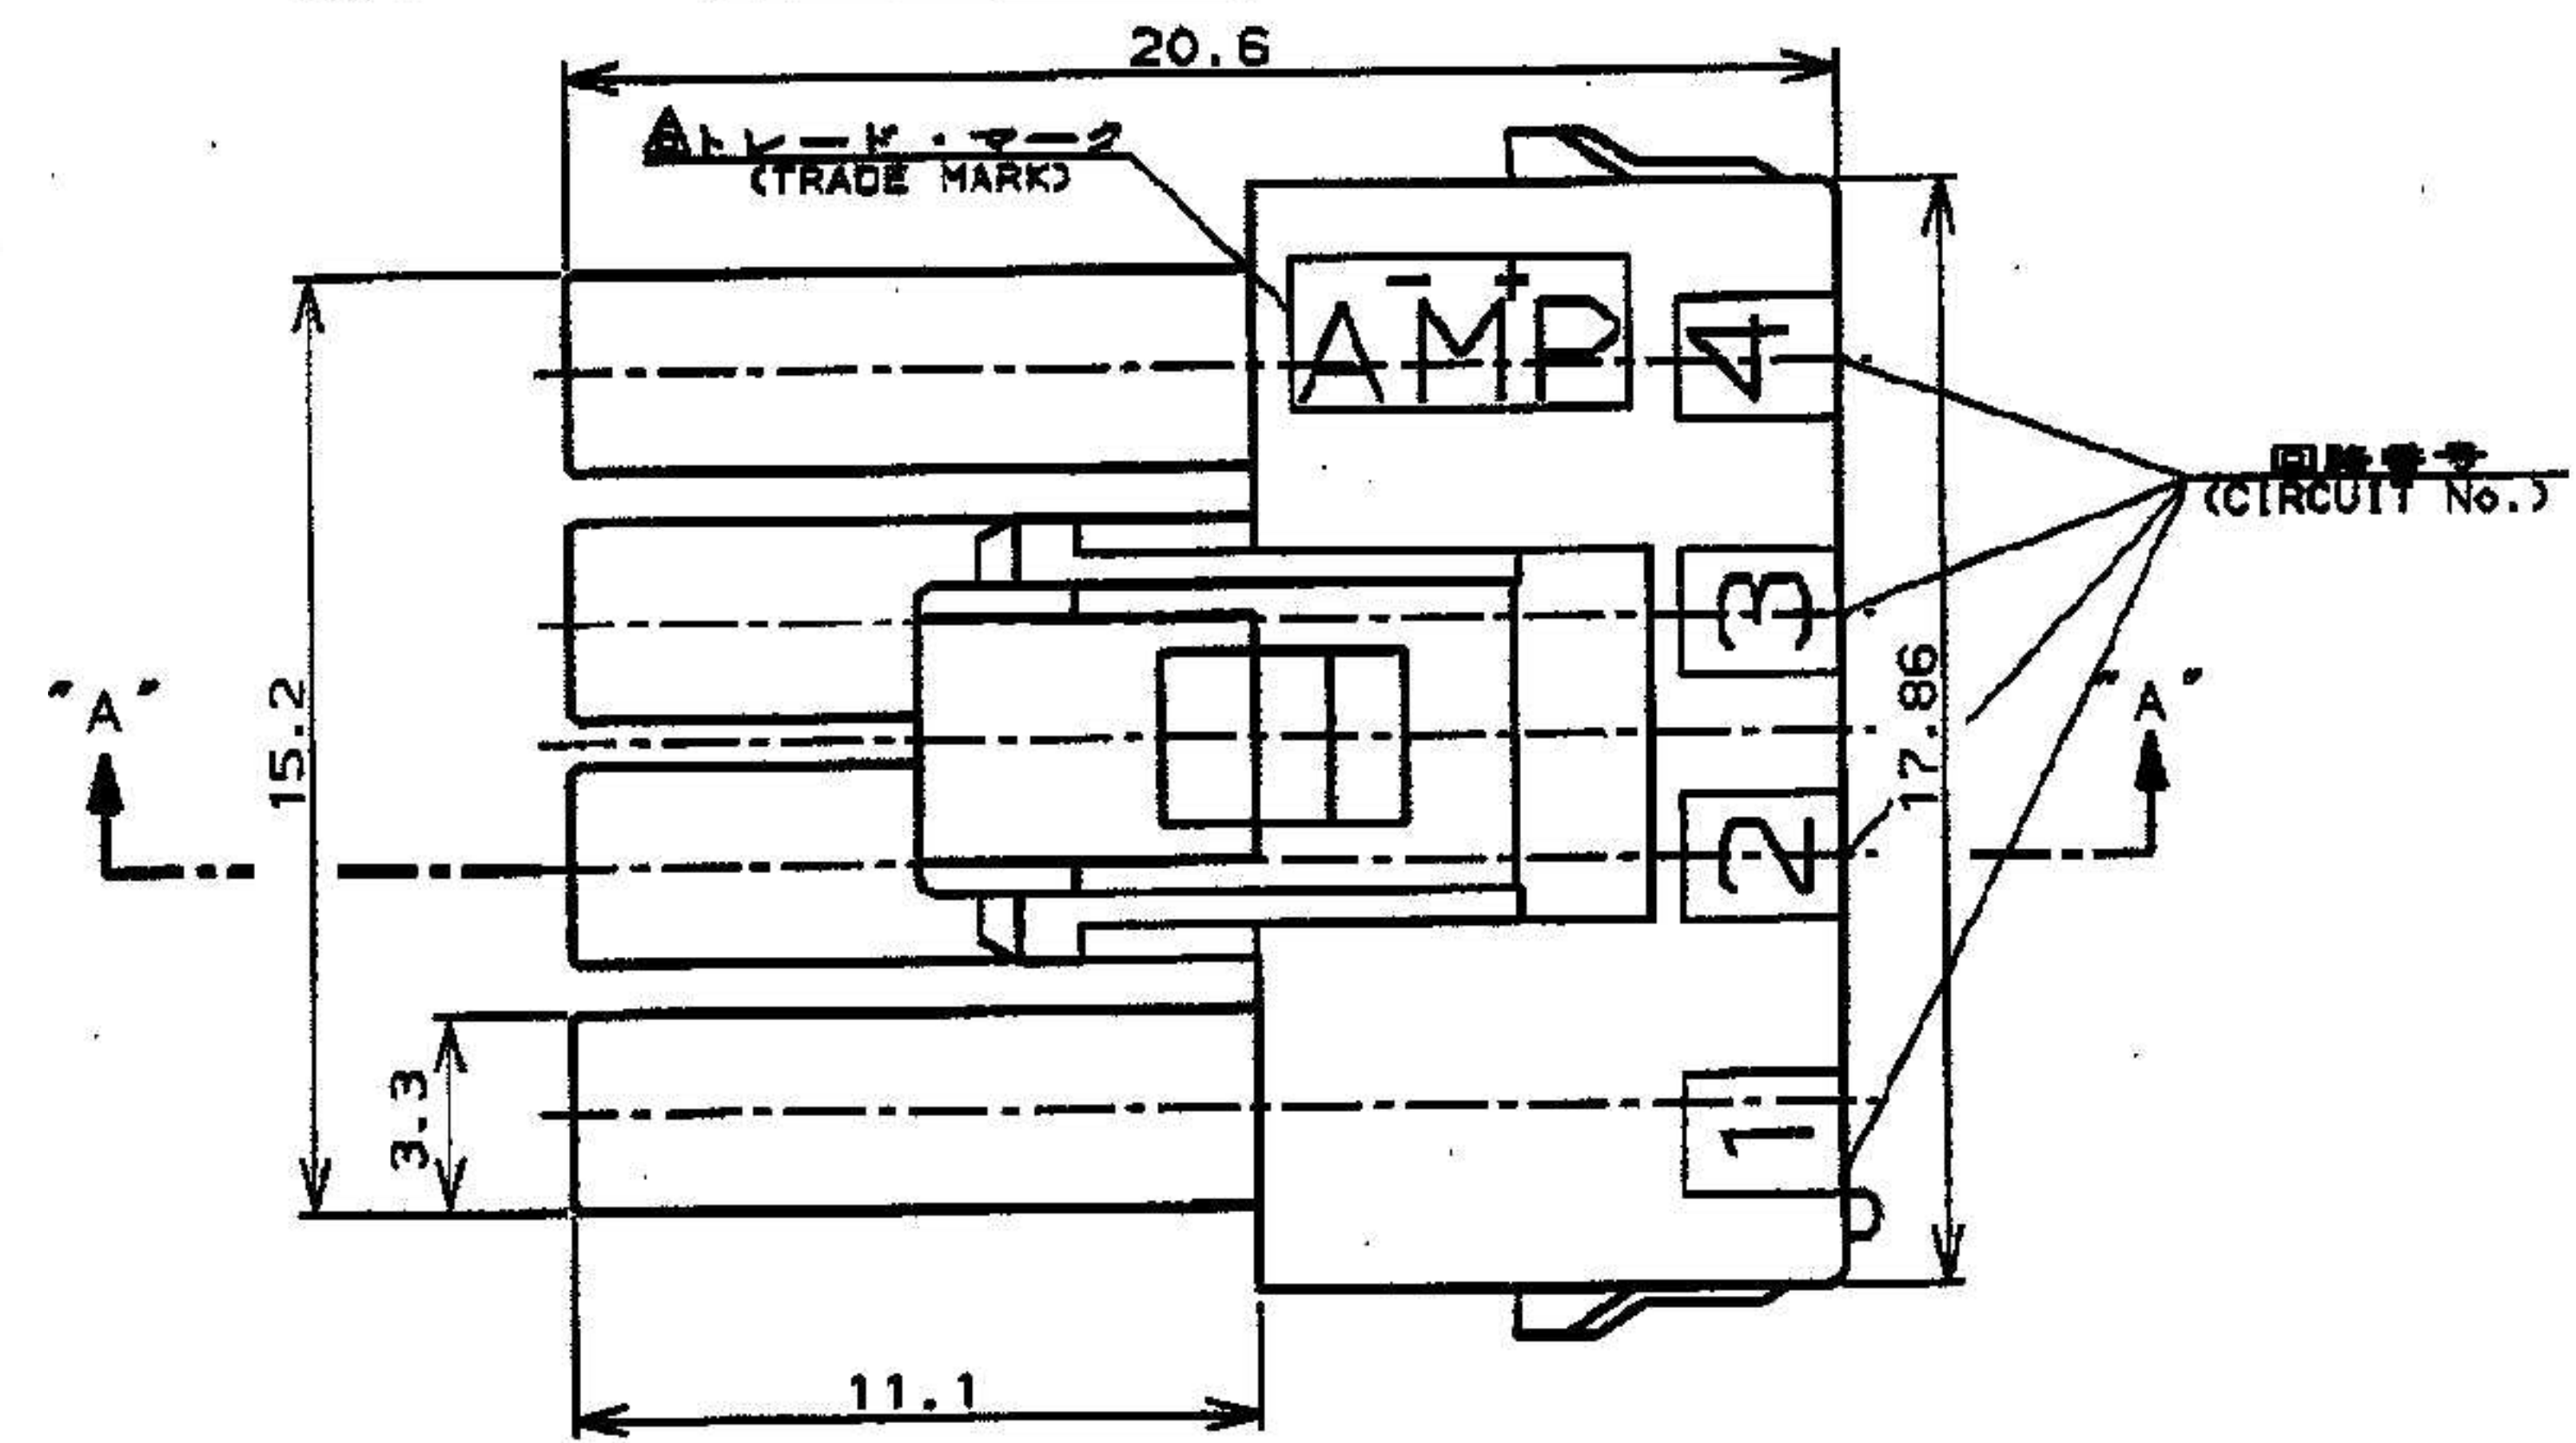

7. ALL PARTS MEET RTI ELECTRICAL RATING OF 105C ACCORDING TO UL 1977.
8. PART 5-177905-1 COMPLY WITH GLOW WIRE REQUIREMENT FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30 (GWT)
9. PART 177905-7 COMPLY WITH HOT WIRE REQUIREMENT, PA66, UL 94V-0, HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN A RESIN THAT COMPLIES WITH THE HOT WIRE IGNITION TEST 109-32026 AND ARE RECOMMENDED FOR USE WITH HWI HOUSING THAT ALSO COMPLY.

△ Preliminary-not for production

表1 (TABLE 1)

トレードマーク (TRADE MARK)	生産場所 (MANUFACTURING PLACE)
— AMP OR AMP	日本 (JAPAN)
— + AMP OR AMP	中国 (CHINA (PRC))
— AMP OR AMP	韓国 (KOREA)

自然色 (NATURAL)	12	177905-7 △
自然色 (NATURAL)	12	5-177905-1
青 (BLUE)	↑	↑ -6
黄 (YELLOW)	↑	↑ -4
自然色 (NATURAL)	12	177905-1
ハウジング色調 (HOUSING COLOR)	極微 (KPos.)	型番 (P/N)

D4	REVISED ECR-14-017020	W.W.	D.Z.	14NOV 2014	AMP Tyco Electronics AMP K.K. Kawasaki, Japan			
D3	REVISED ECR-14-013449	W.W.	D.Z.	14SEP 2014				
D2	REVISED ECR-13-019881	A.Z.	D.Z.	23DEC 2013				
D1	REVISED ECR-12-019929	A.Z.	F.M.	16NOV 2012				
D	変更 FJ00-1369-01	M	M	10JUL 2011				
C	変更 FJ00-0724-99	M	M	20MAY 99	適合電線規格 (WIRE RATED)	絶縁外皮 (INSULATION DIA.)	品名 (NAME)	AMP POWER DOUBLE LOCK CONN. 12ピン 3.96mmピッチ プラグハウジング (3列タイプ)
B	変更 FJ00-0853-99	T.Y.	M.S.	28MAY 99	材料 (MATERIAL)	仕上 (FINISH)	AMP POWER DOUBLE LOCK CONN. 3.96mm PITCH PLUG HOUSING 12 Pos (TYP. ROW)	一般公差
A	変更 FJ00-2560-95	N.Y.	M.S.	17JUN 95	8/8 ナイロン (UL94V-0) 8/8 NYLON	—	10mm下: ±0.2 16mm上: ±0.25 30mm上: ±0.3 全長: ±0.3	SIZE LOC 番号 (No.)
O	作成 FJ00-0791-93	M.S.	M.S.	9SEP 93	DR. M. SUZUKI	DE. M. SUZUKI	—	B J C-177905
LTR	変更 (REVISION RECORD)	DR	CHK	DATE	CHK. M. SHINDO	APP. Y. KASHIWA	尺度 (SCALE)	REV. D4 SHEET 1 OF 1

CUSTOMER DRAWING