
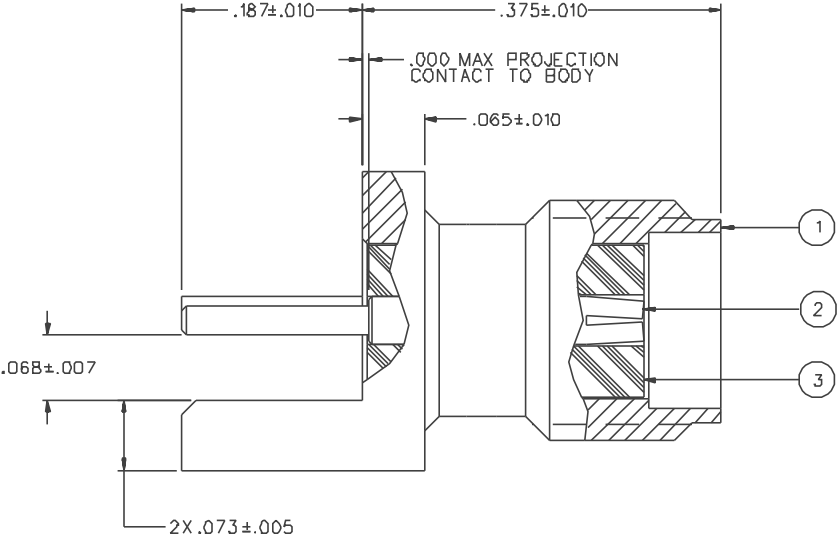


PART NUMBER	ITEM ① BODY	ITEM ② CONTACT	ITEM ③ INSULATOR
142-07D1-B01	BRASS GOLD PL .00001 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	BERYLLIUM COPPER GOLD PL .00005 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	TEFLON
142-07D1-B06	BRASS NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN	BERYLLIUM COPPER GOLD PL .00005 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	TEFLON

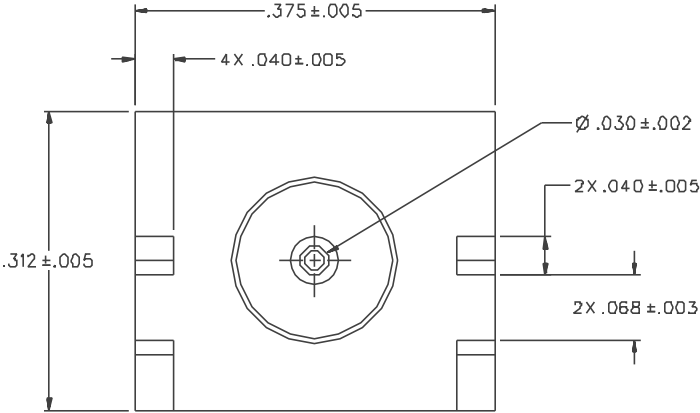

NOTES:

1. SPECIFICATIONS:

IMPEDANCE: 50 OHMS
 FREQUENCY RANGE: 0-18 GHz
 VSWR: NOT APPLICABLE
 WORKING VOLTAGE: 335 VRMS MAX AT SEA LEVEL
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS MIN AT SEA LEVEL
 INSULATION RESISTANCE: 5000 MEGOHM MIN
 CONTACT RESISTANCE:
 CENTER CONTACT - INITIAL 3.0 MILLIOHM MAX, AFTER ENVIRONMENTAL 4.0 MILLIOHM MAX
 OUTER CONDUCTOR - INITIAL 2.0 MILLIOHM MAX AFTER ENVIRONMENTAL NOT APPLICABLE
 Braid to Body - NOT APPLICABLE
 CORONA LEVEL: 250 VOLTS MIN AT 70,000 FEET
 INSERTION LOSS: NOT APPLICABLE
 RF LEAKAGE: NOT APPLICABLE
 RF HIGH POTENTIAL WITHSTANDING VOLTAGE: 670 VRMS MIN AT 4 AND 7MHZ

MECHANICAL:

ENGAGE/DISENGAGE TORQUE: 2 INCH-POUNDS MAX
 MATING TORQUE: 7-10 INCH POUNDS
 COUPLING PROOF TORQUE: NOT APPLICABLE
 COUPLING NUT RETENTION: NOT APPLICABLE
 CONTACT RETENTION: 6 LBS MIN AXIAL FORCE
 4 IN-OZ MIN RADIAL TORQUE
 CABLE ACCEPTABILITY: NOT APPLICABLE
 CABLE HEX CRIMP SIZE: NOT APPLICABLE
 CABLE RETENTION: NOT APPLICABLE
 DURABILITY: 500 CYCLES MIN

ENVIRONMENTAL:

(MEETS OR EXCEEDS THE APPLICABLE PARAGRAPH OF MIL-PRF-39012)
 THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B
 OPERATING TEMPERATURE: -65 DEG C TO 165 DEG C
 CORROSION: MIL-STD-202, METHOD 101, CONDITION B
 SHOCK: MIL-STD-202, METHOD 213, CONDITION I
 VIBRATION: MIL-STD-202, METHOD 204, CONDITION D
 MOISTURE RESISTANCE: MIL-STD-202, METHOD 106

DRAWING NO.									
C - 142-0701-801/810									
0	REVISIONS								
ENGINEERING RELEASE									
03	01-12-89	E						6-14-89	
ADDED: 2X .075+- .005, .065+- .010.									
.187+- .010									
DELETED: .573+- .015, .562+- .010									
CHANGED: UPDATED GRAPHICS,									
.040+- .005 WAS +- .010.									
4	7-16-90								
VERSION UPDATE									
5	9-6-91	R						9-17-91	
ADDED: NOTE 2 .025+- .010									
CHANGED: 2X .068+- .003 WAS 2X									
.068+- .003									
6	10-21-92	R						12-18-92	
CHANGED: .068+- .007 WAS .068+-									
.006, UPDATED GRAPHICS									
6a	2-21-94	R						3-8-94	
CHANGED: -.805 "B", .075/ .055 WAS									
.068+- .007 AND "C", .071/ .055 WAS									
.068+- .003									
6b	6-13-94	R						6-21-94	
ADDED: .000 MAX PROJECTION,									
CUT AWAY FLANGE DETAIL,									
CHANGED: 2X .068+- .003 WAS 2X									
"C", .068+- .007 WAS "B", 4X .040+-									
.004 WAS 2X .040+- .004									
DELETED: .025+- .005, NOTE 2									
TABULATED DIMENSIONS "B" & "C"									
AND REMARKS, P/N 142-0701-805									
7	10-24-96	R						ECN 44272	
VERSION UPDATE									
8	2-26-99	R						ECN 46211	
VERSION UPDATE									
* REVISION NUMBER FOLLOWED BY AN ALPHA *									
* CHARACTER INDICATES DRAWING CLASS *									
* CATION OR PART NUMBER ADDITION ONLY. *									
8a	8-13-01							ECN 47953	

CUSTOMER DRAWING

THIS DRAWING TO BE INTERPRETED
PER ANSI Y 14.5M - 1982

"μSTATION"

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY EJ	DATE 1-12-89	 Cinch Connectivity Solutions 299 Johnson Ave Ste 100 Menasha, WI 54952 1-800-247-8256	
DECIMALS .XX	mm	CHECKED BY	DATE		
XXX		APPROVED BY RJB	DATE 6-12-89	TITLE JACK ASSEMBLY END LAUNCH SMA	
MATL		APPROVED BY	DATE	CODE NO.	DRAWING NO. C - 142-0701-801/810
FINISH		RELEASE DATE	6-14-89	SCALE 10:1	U/N INCH SHEET 2 OF 2