
Microwave Coaxial Connectors

Microwave Coaxial Cable Connectors

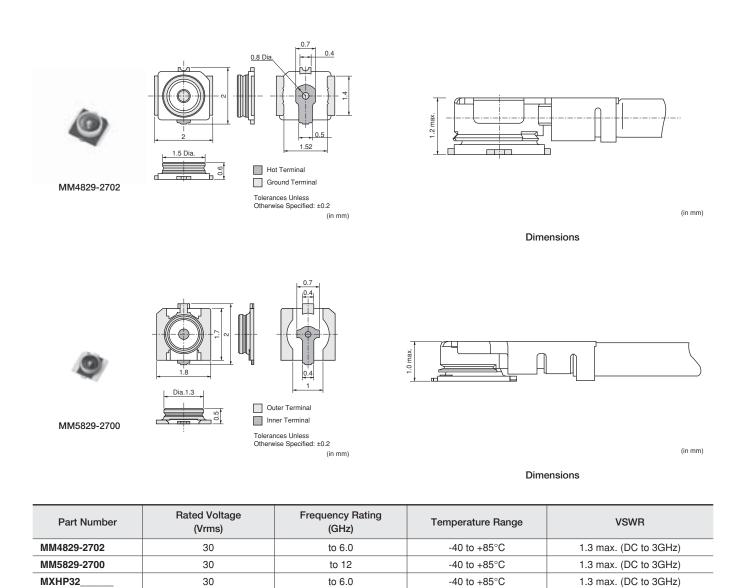

to 12

-40 to +85°C

Impedance: 50ohm


30

MXJA01


1.3 max. (DC to 3GHz)

Microwave Coaxial Connectors


Microwave Coaxial Connectors with Switch

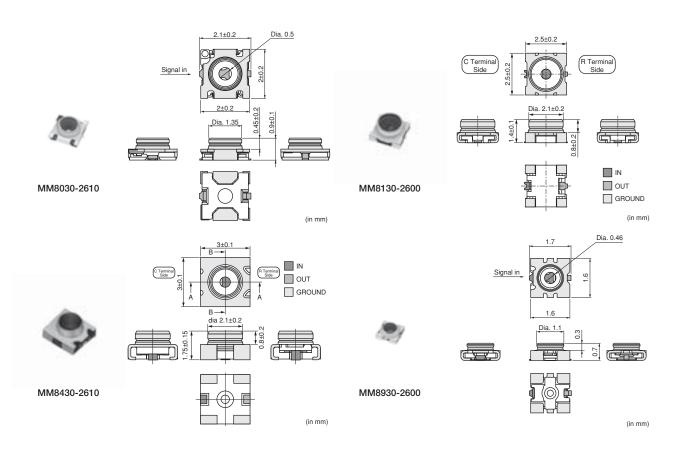






Measurement Probe for MM8130-2600/MM8430-2610 (P/N: MXHS83QE3000)




Measurement Probe for MM8030-2610 (P/N: MXHQ87WJ3000)




(in mm)

Measurement Probe for MM8930-2600 (P/N: MM126515)




muRata

ANote • Please read rating and ACAUTION (for storage, operating, rating, soldering, mounting and handling) in this catalog to prevent smoking and/or burning, etc.
This catalog has only typical specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.



Measurement Probe for MM8930-2600 (P/N: MXHQ87PA3000)



(in mm)

Part Number	Rated Voltage (Vrms)	Frequency Rating (GHz)	Temperature Range	VSWR
MM8030-2610	30	to 11	-40 to +85°C	1.2 max. (DC to 3GHz)
MM8130-2600	30	to 6	-40 to +85°C	1.2 max. (DC to 3GHz)
MM8430-2610	30	to 6	-40 to +85°C	1.2 max. (DC to 3GHz)
MM8930-2600	30	to 6	-40 to +85°C	1.2 max. (DC to 3GHz)

Impedance: 50ohm

muRata