



2

3

4

5

6

7

8

Contents

Product specifications are as of August 2016.

Part Numbering ·····	p2
Basic Characteristics	p6
Temperature Sensor and Compensation 0201 (0603) Size	р7
Temperature Sensor and Compensation 0402 (1005) Size/NCP Series	р8
Temperature Sensor and Compensation 0402 (1005) Size/NCU Series	р9
Temperature Sensor and Compensation 0603 (1608) Size/NCP Series	p10
Temperature Sensor and Compensation 0603 (1608) Size/NCU Series	p11
Temperature Sensor and Compensation 0805 (2012) Size	p12
Temperature Sensor and Compensation Chip Type Standard Land Pattern Dimensions	p13
Temperature Sensor and Compensation Chip Type Temperature Characteristics (Center Value) · · · · · · · · · · · · · · · · · · ·	p14
Temperature Sensor and Compensation Chip Type ①Caution/Notice	p17
Temperature Sensor and Compensation Chip Type Package	p21
5 Temperature Sensor Thermo String Type Temperature Sensor Thermo String Type	p24
Specifications and Test Methods	p25
6 Temperature Sensor Lead Type	p27
Temperature Sensor Lead Type Specifications and Test Methods	p28
Temperature Sensor Lead Insulation Type ···	p29
Temperature Sensor Lead Insulation Type Specifications and Test Methods	p30
Temperature Sensor Thermo String/Lead Type Temperature Characteristics (Center Value)	p31
Temperature Sensor Thermo String/Lead Type ①Caution/Notice	p32
Temperature Sensor Thermo String/Lead Type Package	p34
8 Inrush Current Suppression Lead Type	p35
Current-R Ratio (RT/R25)/ Current-Temperature Characteristics (Typical)	p37
Inrush Current Suppression Lead Type ①Caution/Notice	p41
Inrush Current Suppression Lead Type Package	p43

Please check the MURATA website (http://www.murata.com/) if you cannot find a part number in this catalog.

Part Numbering

NTC Thermistors for Temp. Sensor and Compensation Chip Type

1 Product ID

Product ID	
NC	NTC Thermistors Chip Type

2 Series

Code	Series	
P	Plated Termination Series	
U	High Reliability Series	

3Dimensions (L x W)

Code	Dimensions (L x W)	EIA
03	0.60 x 0.30mm	0201
15	1.00 x 0.50mm	0402
18	1.60 x 0.80mm	0603
21	2.00 x 1.25mm	0805

4Temperature Characteristics

Code	Temperature Characteristics
xc	Nominal B-Constant 3100–3149K
XF	Nominal B-Constant 3250–3299K
XH	Nominal B-Constant 3350–3399K
XM	Nominal B-Constant 3500–3549K
XQ	Nominal B-Constant 3650–3699K
XV	Nominal B-Constant 3900–3949K
xw	Nominal B-Constant 3950–3999K
WB	Nominal B-Constant 4050-4099K
WD	Nominal B-Constant 4150–4199K
WF	Nominal B-Constant 4250–4299K
WL	Nominal B-Constant 4450-4499K
WM	Nominal B-Constant 4500-4549K

6 Resistance

Expressed by three-digit alphanumerics. The unit is ohm (Ω) . The first and second figures are significant digits, and the third figure expresses the number of zeros that follow the two figures.

Ex.	Code	Resistance
	102	1kΩ
	103	10kΩ
	104	100kΩ

6Resistance Tolerance

Code	Resistance Tolerance	
D	±0.5%	
F	±1%	
E	±3%	
J	±5%	

7 Individual Specifications

Structures and other specifications are expressed by two figures.

Ex.	Code	Individual Specifications
	03/05/10/12/60	Standard Type
	□s	Automotive Type

8 Packaging

Code	Packaging
RA	Plastic Taping 4mm Pitch (4000 pcs.)
RB	Paper Taping 4mm Pitch (4000 pcs.)
RC	Paper Taping 2mm Pitch (10000 pcs.)
RL	Paper Taping 2mm Pitch (15000 pcs.)

NTC Thermistor for Temperature Sensor Thermo String Type

1 Product ID

Product ID	
NXF	NTC Thermistors Sensor Thermo String Type

Individual Specifications

Code	Individual Specifications
Т	Commercial Type

3Chip Dimensions

Code	Dimensions (L x T)	EIA
15	1.00 x 0.50mm	0402

4Temperature Characteristics

Code	Temperature Characteristics
XH	Nominal B-Constant 3350–3399K
xv	Nominal B-Constant 3900–3949K
WB	Nominal B-Constant 4050–4099K
WF	Nominal B-Constant 4250–4299K

6 Resistance

Expressed by three figures. The unit is (Ω) . The first and second figures are significant digits, and the third figure expresses the number of zeros that follow the two figures.

Ex.	Code	Resistance
	103	10kΩ
	473	47kΩ
	104	100kΩ

6Resistance Tolerance

Code	Resistance Tolerance
F	±1%

Lead Wire Type

Code	Lead Wire Type
А	ø0.3mm Copper Lead Wire with Polyurethane Coat

3 Shape of the Lead Wire Kink

Code	Shape of the Lead Wire Kink
1	Twisted Lead Wire Type
2	Standard Type

Packaging

Code	Packaging
В	Bulk

@Dimensions (Full Length)

Code	Dimensions (Full Length)
025	25mm
030	30mm
040	40mm
050	50mm
060	60mm
070	70mm
080	80mm
090	90mm
100	100mm
110	110mm
120	120mm
130	130mm
140	140mm
150	150mm

NTC Thermistor for Temperature Sensor/Lead Type

(Part Number) NXR T 15 XH 103 F A 1 B 040

1 2 3 4 5 6 7 8 9 10

1 Product ID

Product ID	
NXR	NTC Thermistor Sensor/Lead Type

Individual Specifications

Code	Individual Specifications
Т	Commercial Type

3Chip Dimensions

Code	Dimensions (L x T)
15	1.00 x 0.50mm

Temperature Characteristics

Code	Temperature Characteristics
XH	Nominal B-Constant 3350-3399K
XM	Nominal B-Constant 3500–3549K
xv	Nominal B-Constant 3900–3949K
WB	Nominal B-Constant 4050–4099K
WF	Nominal B-Constant 4250-4299K

6 Resistance

Expressed by three figures. The unit is (Ω) . The first and second figures are significant digits, and the third figure expresses the number of zeros that follow the two figures.

Ex.	Code	Resistance
	202	2.0kΩ
	103	10kΩ
	104	100kΩ

6Resistance Tolerance

Code	Resistance Tolerance
F	±1%
E	±3%
J	±5%

Lead Wire Type

Code	Lead Wire Type
А	Lead Type: ø0.4mm Copper-clad Fe Wire, Tinned Lead Insulation Type: ø0.46mm Cu Wire with Coat

8Shape of the Lead Wire

Code	Shape of the Lead Wire	
1	Lead Spacing 2.5mm	
3	Lead Spacing 5.0mm	
5	Lead Spacing 2.5mm (Insulation Type)	

Packaging

Code	Packaging	
Α	Ammo Pack Taping	
В	Bulk	

@Dimensions (Full Length)

Differences (Fact Length)		
Code	Lead Type	Lead Insulation Type
010	10mm	_
020	20mm	_
025	_	25mm
030	30mm	30mm
035	_	35mm
040	40mm	_
016	16mm (Taping Type)	_

NTC Thermistors for Inrush Current Suppression Lead Type

1 Product ID

Product ID	
NT	NTC Thermistors

2 Series

Code	Series	Nominal Body Diameter
PA5	Inrush Current Suppression Lead Type	ø5mm
PA6		ø6mm
PA7		ø7mm
PA9		ø9mm
PAA		ø10mm
PAD		ø13mm
PAJ		ø18mm
PAN		ø22mm

3 Resistance

Expressed by three-digit alphanumerics. The unit is ohm (Ω) . The first and second figures are significant digits, and the third figure expresses the number of zeros that follow the two figures. If there is a decimal point, it is expressed by the capital letter "R." In this case, all figures are significant digits.

Ex.

Code	Resistance
3R0	3Ω
100	10Ω

4 Resistance Tolerance

Code	Resistance Tolerance
L	±15%

⑤Individual Specifications

Code	Individual Specifications	Body Diameter
B1	Standard Type (Ammo Pack)	ø7mm, ø9mm
вм	Standard Type (Bulk)	ø7mm, ø9mm
D6	Standard Type (Ammo Pack)	ø10mm, ø13mm
DK	Standard (Bulk)	ø18mm, ø22mm
DN	Standard (Bulk)	ø10mm, ø13mm

6Packaging

Code	Packaging	
A0	Ammo Pack Taping	
во	Bulk	

Basic Characteristics

Basic Characteristics

1. Zero-power Resistance of Thermistor: R

R=R₀ expB (1/T-1/T₀) (1)

R: Resistance in ambient temperature T (K)

(K: absolute temperature)

Ro: Resistance in ambient temperature To (K)

B: B-Constant of Thermistor

2. B-Constant

as (1) formula $B = \ell \, n \, (R/R_0) \, / \, (1/T - 1/T_0) \, \cdots \, (2)$


3. Thermal Dissipation Constant

When electric power P (mW) is spent in ambient temperature T_1 and thermistor temperature rises T_2 , the formula is as follows

$$P=C(T_2-T_1)$$
(3)


C: Thermal dissipation constant (mW/°C)

Thermal dissipation constant is varied with dimensions, measurement conditions, etc.

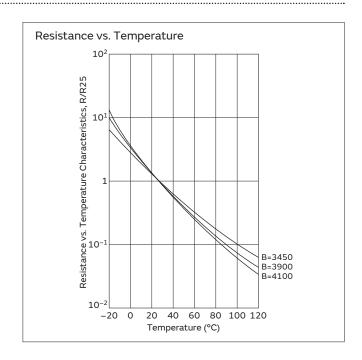

4. Thermal Time Constant

Period in which the thermistor's temperature will change 63.2% of its temperature difference from ambient temperature T_0 (°C) to T_1 (°C).

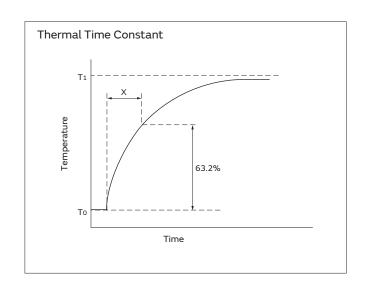

Performance

ltem	Condition
Resistance	Measured by zero-power in specified ambient temperature.
B-Constant	Calculated between two specified ambient temperatures by the next formula. T and To is absolute temperature (K). $B = \frac{\ell \ln (R/R_0)}{1/T - 1/T_0}$
Thermal Dissipation Constant	Shows necessary electric power that Thermistor's temperature rises 1°C by self-heating. It is calculated by the next formula (mW/°C). $C = \frac{P}{T-T_0}$
Rated Electric Power	Shows the required electric power that causes the thermistor's temperature to rise to a specified temperature by self-heating, at ambient temperature of 25 °C.
Permissible Operating Current	It is possible to keep the thermistor's temperature rising max. 1°C.

Please inquire about test conditions and ratings.

● Temperature Sensor and Compensation 0201 (0603) Size

Chip NTC Thermistors' Ni barrier termination provides excellent solderability and their unique construction offers high stability in the application's environment.


Features

- Excellent solderability and high stability in the application's environment
- 2. Excellent long-term stability
- 3. High accuracy in resistance and B-Constant
- 4. Reflow soldering possible
- 5. NCP series are recognized by UL/cUL. (UL1434, File No.E137188)

Applications

- 1. Temperature compensation for transistors, ICs, and crystal oscillators in mobile communications
- 2. Temperature sensor for rechargeable batteries





Detailed are accessable from the following URL. http://www.murata.com/en-global/products/thermistor/ntc/ncp

Part Number	Resistance (25°C) (ohm)	B-Constant (25-50°C) (K)	B-Constant (25-80°C) (Reference Value) (K)	B-Constant (25-85°C) (Reference Value) (K)	B-Constant (25-100°C) (Reference Value) (K)	Permissible Operating Current (25°C) (mA)	Rated Electric Power (25°C) (mW)	Typical Dissipation Constant (25°C) (mW/°C)
NCP03XM102□05RL	1.0k	3500 ±1%	3539	3545	3560	1.00	100	1
NCP03XM152□05RL	1.5k	3500 ±1%	3539	3545	3560	0.81	100	1
NCP03XM222□05RL	2.2k	3500 ±1%	3539	3545	3560	0.67	100	1
NCP03XM332□05RL	3.3k	3500 ±1%	3539	3545	3560	0.55	100	1
NCP03XM472□05RL	4.7k	3500 ±1%	3539	3545	3560	0.46	100	1
NCP03XH682□05RL	6.8k	3380 ±1%	3428	3434	3455	0.38	100	1
NCP03XH103F05RL	10k ±1%	3380 ±1%	3428	3434	3455	0.31	100	1
NCP03XH103□05RL	10k	3380 ±1%	3428	3434	3455	0.31	100	1
NCP03XV103□05RL	10k	3900 ±1%	3930	3934	3944	0.31	100	1
NCP03XH153□05RL	15k	3380 ±1%	3428	3434	3455	0.25	100	1
NCP03XH223□05RL	22k	3380 ±1%	3428	3434	3455	0.21	100	1
NCP03WF333 ☐05RL	33k	4250 ±1%	4303	4311	4334	0.17	100	1
NCP03WB473□05RL	47k	4050 ±3%	4101	4108	4131	0.14	100	1
NCP03WL473□05RL	47k	4485 ±1%	4537	4543	4557	0.14	100	1
NCP03WF683□05RL	68k	4250 ±1%	4303	4311	4334	0.12	100	1
NCP03WL683□05RL	68k	4485 ±1%	4537	4543	4557	0.12	100	1
NCP03WF104F05RL	100k ±1%	4250 ±1%	4303	4311	4334	0.10	100	1
NCP03WF104□05RL	100k	4250 ±1%	4303	4311	4334	0.10	100	1
NCP03WL104□05RL	100k	4485 ±1%	4537	4543	4557	0.10	100	1
NCP03WL154□05RL	150k	4485 ±1%	4537	4543	4557	0.08	100	1
NCP03WL224□05RL	220k	4485 ±1%	4537	4543	4557	0.06	100	1

 $[\]Box$ is filled with resistance tolerance codes (E: ±3%, J: ±5%).

Rated Electric Power shows the required electric power that the thermistor's temperature rise to 125°C by self-heating, at ambient temperature of 25 °C. Operating Temperature Range: -40°C to +125°C

Chip NTC Thermistors' Ni barrier termination provides excellent solderability and their unique construction offers high stability in the application's environment.


Features

- Excellent solderability and high stability in the application's environment
- 2. Excellent long-term stability
- 3. High accuracy in resistance and B-Constant
- 4. Reflow soldering possible
- Same B-constant in the same resistance in the three sizes (0805 size/0603 size/0402 size)
 Downsize is easy for design.
- 6. NCP series are recognized by UL/cUL. (UL1434, File No.E137188)

Applications

- Temperature compensation for transistors, ICs, and crystal oscillators in mobile communications
- 2. Temperature sensor for rechargeable batteries
- 3. Temperature compensation of LCD
- 4. Temperature compensation in general use of electric circuits





Detailed are accessable from the following URL. http://www.murata.com/en-global/products/thermistor/ntc/ncp

Part Number	Resistance (25°C) (ohm)	B-Constant (25-50°C) (K)	B-Constant (25-80°C) (Reference Value) (K)	B-Constant (25-85°C) (Reference Value) (K)	B-Constant (25-100°C) (Reference Value) (K)	Permissible Operating Current (25°C) (mA)	Rated Electric Power (25°C) (mW)	Typical Dissipation Constant (25°C) (mW/°C)
NCP15XM221□03RC	220	3500 ±3%	3539	3545	3560	2.10	100	1
NCP15XM331□03RC	330	3500 ±3%	3539	3545	3560	1.70	100	1
NCP15XQ471□03RC	470	3650 ±2%	3688	3693	3706	1.40	100	1
NCP15XQ681□03RC	680	3650 ±3%	3688	3693	3706	1.20	100	1
NCP15XQ102□03RC	1.0k	3650 ±2%	3688	3693	3706	1.00	100	1
NCP15XW152 03RC	1.5k	3950 ±3%	3982	3987	3998	0.81	100	1
NCP15XW222 03RC	2.2k	3950 ±3%	3982	3987	3998	0.67	100	1
NCP15XW332□03RC	3.3k	3950 ±3%	3982	3987	3998	0.55	100	1
NCP15XM472□03RC	4.7k	3500 ±2%	3539	3545	3560	0.46	100	1
NCP15XW472□03RC	4.7k	3950 ±3%	3982	3987	3998	0.46	100	1
NCP15XW682□03RC	6.8k	3950 ±3%	3982	3987	3998	0.38	100	1
NCP15XV103□03RC	10k	3900 ±3%	3930	3934	3944	0.31	100	1
NCP15XW153□03RC	15k	3950 ±3%	3982	3987	3998	0.25	100	1
NCP15XW223□03RC	22k	3950 ±3%	3982	3987	3998	0.21	100	1
NCP15WL223□03RC	22k	4485 ±1%	4537	4543	4557	0.21	100	1
NCP15WB333□03RC	33k	4050 ±3%	4101	4108	4131	0.17	100	1
NCP15WL333□03RC	33k	4485 ±1%	4537	4543	4557	0.17	100	1
NCP15WL473□03RC	47k	4485 ±1%	4537	4543	4557	0.14	100	1
NCP15WD683□03RC	68k	4150 ±3%	4201	4209	4232	0.12	100	1
NCP15WL683□03RC	68k	4485 ±1%	4537	4543	4557	0.12	100	1
NCP15WL104□03RC	100k	4485 ±1%	4537	4543	4557	0.10	100	1
NCP15WL154□03RC	150k	4485 ±1%	4537	4543	4557	0.08	100	1
NCP15WM154□03RC	150k	4500 ±3%	4571	4582	4614	0.08	100	1
NCP15WM224□03RC	220k	4500 ±3%	4571	4582	4614	0.06	100	1
NCP15WM474□03RC	470k	4500 ±3%	4571	4582	4614	0.04	100	1

 \Box is filled with resistance tolerance codes (E: ±3%, J: ±5%).

Rated Electric Power shows the required electric power that the thermistor's temperature rise to 125°C by self-heating, at ambient temperature of 25 °C. Operating Temperature Range: -40°C to +125°C

● Temperature Sensor and Compensation 0402 (1005) Size/NCU Series

0402/0603 sized Chip NTC Thermistors have Ni barrier termination, provide excellent solderability and offer high stability in environment due to unique inner construction.


This is new series, available market where request the high reliability for wide temperature sensing and compensation.

Features

- Excellent solderability and high stability in the application's environment
- 2. Excellent long-term stability
- 3. High accuracy in resistance and B-Constant
- 4. Reflow soldering possible
- Same B-constant in the same resistance in the three sizes (0805 size/0603 size/0402 size)
 Downsize is easy for design.
- 6. NCU series are recognized by UL/cUL. (UL1434, File No.E137188)

Applications

- Temperature compensation for transistors, ICs, and crystal oscillators in mobile communications
- 2. Temperature sensor for rechargeable batteries
- 3. Temperature compensation of LCD
- 4. Temperature compensation in general use of electric circuits



Detailed are accessable from the following URL. http://www.murata.com/en-global/products/thermistor/ntc/ncu

Part Number	Resistance (25°C) (ohm)	B-Constant (25-50°C) (K)	B-Constant (25-80°C) (Reference Value) (K)	B-Constant (25-85°C) (Reference Value) (K)	B-Constant (25-100°C) (Reference Value) (K)	Permissible Operating Current (25°C) (mA)	Rated Electric Power (25°C) (mW)	Typical Dissipation Constant (25°C) (mW/°C)
NCU15XH103D60RC	10k ±0.5%	3380 ±0.7%	3428	3434	3455	0.31	100	1
NCU15XH103F60RC	10k ±1%	3380 ±1%	3428	3434	3455	0.31	100	1
NCU15XH103□60RC	10k	3380 ±1%	3428	3434	3455	0.31	100	1
NCU15WB473D60RC	47k ±0.5%	4050 ±0.5%	4101	4108	4131	0.14	100	1
NCU15WB473F60RC	47k ±1%	4050 ±1%	4101	4108	4131	0.14	100	1
NCU15WB473□60RC	47k	4050 ±1%	4101	4108	4131	0.14	100	1
NCU15WF104D60RC	100k ±0.5%	4250 ±0.5%	4303	4311	4334	0.1	100	1
NCU15WF104F60RC	100k ±1%	4250 ±1%	4303	4311	4334	0.1	100	1
NCU15WF104□60RC	100k	4250 ±1%	4303	4311	4334	0.1	100	1

 $[\]square$ is filled with resistance tolerance codes (E: ±3%, J: ±5%).

Rated Electric Power is necessary electric power for Thermistor's temperature to rise 100°C by self heating at 25°C in still air.

Operating Temperature Range: -40°C to +125°C

If there is any additionally electrical characteristics, please contact from close sales office or website.

Chip NTC Thermistors' Ni barrier termination provides excellent solderability and their unique construction offers high stability in the application's environment.


Features

- Excellent solderability and high stability in the application's environment
- 2. Excellent long-term stability
- 3. High accuracy in resistance and B-constant
- 4. Flow/Reflow soldering possible
- Same B-Constant in the same resistance in the three sizes (0805 size/0603 size/0402 size)
 Downsize is easy for design.
- 6. NCP series are recognized by UL/cUL. (UL1434, File No.E137188)

Applications

- Temperature compensation for transistors, ICs, and crystal oscillators in mobile communications
- 2. Temperature sensor for rechargeable batteries
- 3. Temperature compensation of LCD
- 4. Temperature compensation in general use of electric circuits





Detailed are accessable from the following URL. http://www.murata.com/en-global/products/thermistor/ntc/ncp

Part Number	Resistance (25°C) (ohm)	B-Constant (25-50°C) (K)	B-Constant (25-80°C) (Reference Value) (K)	B-Constant (25-85°C) (Reference Value) (K)	B-Constant (25-100°C) (Reference Value) (K)	Permissible Operating Current (25°C) (mA)	Rated Electric Power (25°C) (mW)	Typical Dissipation Constant (25°C) (mW/°C)
NCP18XM221□03RB	220	3500 ±3%	3539	3545	3560	2.10	100	1
NCP18XM331□03RB	330	3500 ±3%	3539	3545	3560	1.70	100	1
NCP18XQ471□03RB	470	3650 ±2%	3688	3693	3706	1.40	100	1
NCP18XQ681□03RB	680	3650 ±3%	3688	3693	3706	1.20	100	1
NCP18XQ102□03RB	1.0k	3650 ±2%	3688	3693	3706	1.00	100	1
NCP18XW152□03RB	1.5k	3950 ±3%	3982	3987	3998	0.81	100	1
NCP18XW222□03RB	2.2k	3950 ±3%	3982	3987	3998	0.67	100	1
NCP18XW332□03RB	3.3k	3950 ±3%	3982	3987	3998	0.55	100	1
NCP18XM472□03RB	4.7k	3500 ±2%	3539	3545	3560	0.46	100	1
NCP18XW472□03RB	4.7k	3950 ±3%	3982	3987	3998	0.46	100	1
NCP18XW682□03RB	6.8k	3950 ±3%	3982	3987	3998	0.38	100	1
NCP18XV103□03RB	10k	3900 ±3%	3930	3934	3944	0.31	100	1
NCP18XW153□03RB	15k	3950 ±3%	3982	3987	3998	0.25	100	1
NCP18XW223□03RB	22k	3950 ±3%	3982	3987	3998	0.21	100	1
NCP18WB333□03RB	33k	4050 ±3%	4101	4108	4131	0.17	100	1
NCP18WD683□03RB	68k	4150 ±3%	4201	4209	4232	0.12	100	1
NCP18WM154□03RB	150k	4500 ±3%	4571	4582	4614	0.08	100	1
NCP18WM224□03RB	220k	4500 ±3%	4571	4582	4614	0.06	100	1
NCP18WM474□03RB	470k	4500 ±3%	4571	4582	4614	0.04	100	1


 \square is filled with resistance tolerance codes (E: ±3%, J: ±5%).

Rated Electric Power shows the required electric power that the thermistor's temperature rise to 125°C by self-heating, at ambient temperature of 25 °C. Operating Temperature Range: -40°C to +125°C

0402/0603 sized Chip NTC Thermistors have Ni barrier termination, provide excellent solderability and offer high stability in environment due to unique inner construction.

This is new series, available market where request the high reliability for wide temperature sensing and compensation.





- 1. Excellent solderability and high stability in the application's environment
- 2. Excellent long-term stability
- 3. High accuracy in resistance and B-constant
- 4. Flow/Reflow soldering possible
- 5. Same B-Constant in the same resistance in the three sizes (0805 size/0603 size/0402 size) Downsize is easy for design.
- 6. NCU series are recognized by UL/cUL. (UL1434, File No.E137188)

Applications

Features

- 1. Temperature compensation for transistors, ICs, and crystal oscillators in mobile communications
- 2. Temperature sensor for rechargeable batteries
- 3. Temperature compensation of LCD
- 4. Temperature compensation in general use of electric circuits

Detailed are accessable from the following URL. http://www.murata.com/en-global/products/thermistor/ntc/ncu

Part Number	Resistance (25°C) (ohm)	B-Constant (25-50°C) (K)	B-Constant (25-80°C) (Reference Value) (K)	B-Constant (25-85°C) (Reference Value) (K)	B-Constant (25-100°C) (Reference Value) (K)	Permissible Operating Current (25°C) (mA)	Rated Electric Power (25°C) (mW)	Typical Dissipation Constant (25°C) (mW/°C)
NCU18XH103D60RB	10k ±0.5%	3380 ±0.7%	3428	3434	3455	0.31	100	1
NCU18XH103F60RB	10k ±1%	3380 ±1%	3428	3434	3455	0.31	100	1
NCU18XH103□60RB	10k	3380 ±1%	3428	3434	3455	0.31	100	1
NCU18WB473D60RB	47k ±0.5%	4050 ±0.5%	4101	4108	4131	0.14	100	1
NCU18WB473F60RB	47k ±1%	4050 ±1%	4101	4108	4131	0.14	100	1
NCU18WB473□60RB	47k	4050 ±1%	4101	4108	4131	0.14	100	1
NCU18WF104D60RB	100k ±0.5%	4250 ±0.5%	4303	4311	4334	0.1	100	1
NCU18WF104F60RB	100k ±1%	4250 ±1%	4303	4311	4334	0.1	100	1
NCU18WF104□60RB	100k	4250 ±2%	4303	4311	4334	0.1	100	1

 \square is filled with resistance tolerance codes (E: ±3%, J: ±5%).

 $Rated\ Electric\ Power\ is\ necessary\ electric\ power\ for\ Thermistor's\ temperature\ to\ rise\ 100°C\ by\ self\ heating\ at\ 25°C\ in\ still\ air.$

Operating Temperature Range: -40°C to +125°C

If there is any additionally electrical characteristics, please contact from close sales office or website.

● Temperature Sensor and Compensation 0805 (2012) Size

Chip NTC Thermistors' Ni barrier termination provides excellent solderability and their unique construction offers high stability in the application's environment.


Features

- 1. Excellent solderability and high stability in the application's environment
- 2. Excellent long-term stability
- 3. High accuracy in resistance and B-constant
- 4. Flow/Reflow soldering possible
- Same B-Constant in the same resistance in the three sizes (0805 size/0603 size/0402 size)
 Downsize is easy for design.
- 6. NCP series are recognized by UL/cUL. (UL1434, File No.E137188)

Applications

- Temperature compensation for transistors, ICs, and crystal oscillators in mobile communications
- 2. Temperature sensor for rechargeable batteries
- 3. Temperature compensation of LCD
- 4. Temperature compensation in general use of electric circuits






Detailed are accessable from the following URL. http://www.murata.com/en-global/products/thermistor/ntc/ncp

Part Number	Resistance (25°C) (ohm)	B-Constant (25-50°C) (K)	B-Constant (25-80°C) (Reference Value) (K)	B-Constant (25-85°C) (Reference Value) (K)	B-Constant (25-100°C) (Reference Value) (K)	Permissible Operating Current (25°C) (mA)	Rated Electric Power (25°C) (mW)	Typical Dissipation Constant (25°C) (mW/°C)
NCP21XM221J03RA	220 ±5%	3500 ±3%	3539	3545	3560	3.00	200	2
NCP21XQ471J03RA	470 ±5%	3650 ±3%	3688	3693	3706	2.00	200	2
NCP21XQ102J03RA	1.0k ±5%	3650 ±3%	3688	3693	3706	1.40	200	2
NCP21XW222J03RA	2.2k ±5%	3950 ±3%	3982	3987	3998	0.90	200	2
NCP21XM472J03RA	4.7k ±5%	3500 ±3%	3539	3545	3560	0.65	200	2
NCP21XV103J03RA	10k ±5%	3900 ±3%	3930	3934	3944	0.44	200	2
NCP21XW153J03RA	15k ±5%	3950 ±3%	3982	3987	3998	0.36	200	2
NCP21XW223J03RA	22k ±5%	3950 ±3%	3982	3987	3998	0.30	200	2
NCP21WB333J03RA	33k ±5%	4050 ±3%	4101	4108	4131	0.24	200	2
NCP21WB473J03RA	47k ±5%	4050 ±3%	4101	4108	4131	0.20	200	2
NCP21WF104J03RA	100k ±5%	4250 ±3%	4303	4311	4334	0.14	200	2

Rated Electric Power shows the required electric power that the thermistor's temperature rise to 125°C by self-heating, at ambient temperature of 25 °C. Operating Temperature Range: -40°C to +125°C

Temperature Sensor and Compensation Chip Type Standard Land Pattern Dimensions



Part Number	Soldering	Dimensions (mm)					
Pait Nullibel	Methods	Chip (LxW)	a	b	С		
NCP03	Reflow Soldering	0.6x0.3	0.25	0.3	0.3		
NCP15/NCU15	Reflow Soldering	1.0x0.5	0.4	0.4-0.5	0.5		
NCP18	Flow Soldering	1.6x0.8	0.6-1.0	0.8-0.9	0.6-0.8		
NCP16	Reflow Soldering	1.000.6	0.6-0.8	0.6-0.7	0.6-0.8		
NCU18	Flow Soldering	1.6x0.8	0.6-1.2	0.8-0.9	0.6-0.8		
NC018	Reflow Soldering	1.600.8	0.6-1.2	0.6-0.7	0.6-0.8		
NCP21	Flow Soldering	2.0x1.25	1.0-1.1	0.9-1.0	1.0-1.2		
NCPZI	Reflow Soldering	2.0X1.25	1.0-1.1	0.6-0.7	1.0-1.2		

Temperature Sensor and Compensation Chip Type Temperature Characteristics (Center Value)

Part Number	NCP□□XM221	NCP□□XM331	NCP□□XQ471	NCP□□XQ681	NCP□□XM102	NCP□□XQ102	NCP□□XM152	NCP□□XW152
Resistance	220Ω	330Ω	470Ω	680Ω	1.0kΩ	1.0kΩ	1.5kΩ	1.5kΩ
B-Constant	3500K	3500K	3650K	3650K	3500K	3650K	3500K	3950K
Temp. (°C)	Resistance (Ω)	Resistance (Ω)	Resistance (Ω)	Resistance (Ω)	Resistance (kΩ)	Resistance (kΩ)	Resistance (kΩ)	Resistance (kΩ)
-40	4947.904	7421.856	11822.473	17104.854	21.266	25.154	31.899	51.791
-35	3703.755	5555.632	8767.745	12685.248	16.150	18.655	24.225	37.172
-30	2798.873	4198.309	6570.224	9505.855	12.347	13.979	18.520	27.005
-25	2135.887	3203.831	4971.784	7193.219	9.503	10.578	14.255	19.843
-20	1645.037	2467.555	3796.933	5493.436	7.365	8.079	11.047	14.728
-15	1278.034	1917.051	2923.400	4229.599	5.747	6.220	8.621	11.044
-10	1000.620	1500.930	2269.599	3283.675	4.516	4.829	6.773	8.362
-5	789.612	1184.418	1775.225	2568.411	3.572	3.777	5.358	6.389
0	627.752	941.628	1399.050	2024.158	2.844	2.977	4.266	4.922
5	502.474	753.711	1110.220	1606.275	2.280	2.362	3.419	3.825
10	405.010	607.514	887.257	1283.691	1.839	1.888	2.758	2.994
15	328.480	492.720	713.463	1032.245	1.492	1.518	2.238	2.361
20	268.044	402.066	577.375	835.351	1.218	1.229	1.827	1.876
25	220.000	330.000	470.000	680.000	1.000	1.000	1.500	1.500
30	181.576	272.365	384.800	556.733	0.825	0.819	1.238	1.207
35	150.668	226.002	316.757	458.287	0.685	0.674	1.027	0.978
40	125.681	188.521	262.177	379.320	0.571	0.558	0.857	0.797
45	105.336	158.004	218.069	315.504	0.479	0.464	0.718	0.653
50	88.717	133.076	182.297	263.749	0.403	0.388	0.605	0.538
55	75.059	112.588	153.150	221.579	0.341	0.326	0.512	0.446
60	63.777	95.666	129.249	186.998	0.290	0.275	0.435	0.371
65	54.415	81.622	109.551	158.499	0.247	0.233	0.371	0.311
70	46.631	69.946	93.281	134.960	0.212	0.199	0.318	0.261
75	40.115	60.172	79.750	115.383	0.182	0.170	0.274	0.221
80	34.637	51.955	68.446	99.029	0.157	0.146	0.236	0.187
85	30.013	45.019	58.996	85.356	0.136	0.126	0.205	0.160
90	26.110	39.165	51.036	73.839	0.119	0.109	0.178	0.137
95	22.790	34.186	44.332	64.140	0.104	0.094	0.155	0.117
100	19.957	29.935	38.640	55.905	0.091	0.082	0.136	0.101
105	17.541	26.312	33.790	48.888	0.080	0.072	0.120	0.088
110	15.453	23.180	29.664	42.918	0.070	0.063	0.105	0.076
115	13.663	20.494	26.123	37.795	0.062	0.056	0.093	0.067
120	12.114	18.171	23.091	33.409	0.055	0.049	0.083	0.058
125	10.778	16.168	20.472	29.618	0.049	0.044	0.074	0.051
Part Number		NCP□□XW222			NCP□□XM472	NCP□□XW472		NCP□□XW682
Resistance	2.2kΩ	2.2kΩ	3.3kΩ	3.3kΩ	4.7kΩ	4.7kΩ	6.8kΩ	6.8kΩ
B-Constant	3500K	3950K	3500K	3950K	3500K	3950K	3380K	3950K

Part Number	NCP□□XM222	NCP□□XW222	NCP□□XM332	NCP□□XW332	NCP□□XM472	NCP□□XW472	NCP□□XH682	NCP□□XW682
Resistance	2.2kΩ	2.2kΩ	3.3kΩ	3.3kΩ	4.7kΩ	4.7kΩ	6.8kΩ	6.8kΩ
B-Constant	3500K	3950K	3500K	3950K	3500K	3950K	3380K	3950K
Temp. (°C)	Resistance (kΩ)							
-40	46.786	75.961	70.179	113.941	105.705	162.279	133.043	234.787
-35	35.530	54.520	53.295	81.779	79.126	116.474	100.756	168.515
-30	27.162	39.607	40.743	59.411	59.794	84.615	77.076	122.422
-25	20.907	29.103	31.360	43.654	45.630	62.173	59.540	89.953
-20	16.203	21.601	24.304	32.401	35.144	46.147	46.401	66.766
-15	12.644	16.198	18.966	24.297	27.303	34.604	36.482	50.066
-10	9.934	12.264	14.901	18.396	21.377	26.200	28.904	37.906
-5	7.858	9.370	11.787	14.055	16.869	20.018	23.047	28.963
0	6.257	7.219	9.386	10.829	13.411	15.423	18.509	22.313
5	5.015	5.609	7.523	8.414	10.735	11.984	14.974	17.338
10	4.045	4.391	6.067	6.586	8.653	9.380	12.189	13.571
15	3.283	3.463	4.924	5.195	7.018	7.399	9.978	10.705
20	2.680	2.751	4.019	4.126	5.726	5.877	8.215	8.503
25	2.200	2.200	3.300	3.300	4.700	4.700	6.800	6.800
30	1.816	1.771	2.724	2.656	3.879	3.783	5.654	5.474
35	1.507	1.434	2.260	2.152	3.219	3.064	4.725	4.434
40	1.257	1.169	1.885	1.753	2.685	2.497	3.967	3.613
45	1.053	0.958	1.580	1.437	2.250	2.046	3.344	2.961
50	0.887	0.789	1.331	1.184	1.895	1.686	2.829	2.440
55	0.751	0.654	1.126	0.981	1.604	1.397	2.404	2.022
60	0.638	0.545	0.957	0.817	1.363	1.164	2.050	1.683
65	0.544	0.456	0.816	0.684	1.163	0.974	1.759	1.409
70	0.466	0.383	0.700	0.575	0.996	0.819	1.515	1.185
75	0.401	0.324	0.602	0.486	0.857	0.692	1.309	1.001
80	0.346	0.275	0.520	0.412	0.740	0.587	1.135	0.849
85	0.300	0.234	0.450	0.351	0.641	0.500	0.988	0.724
90	0.261	0.200	0.392	0.301	0.558	0.428	0.862	0.620
95	0.228	0.172	0.342	0.258	0.487	0.368	0.755	0.532
100	0.200	0.149	0.299	0.223	0.426	0.318	0.662	0.459
105	0.175	0.129	0.263	0.193	0.375	0.275	0.583	0.398
110	0.155	0.112	0.232	0.168	0.330	0.239	0.515	0.346
115	0.137	0.098	0.205	0.146	0.292	0.208	0.457	0.302
120	0.121	0.085	0.182	0.128	0.259	0.182	0.406	0.264
125	0.108	0.075	0.162	0.113	0.230	0.160	0.361	0.232

Continued on the following page. 7

Temperature Sensor and Compensation Chip Type Temperature Characteristics (Center Value)

Continued from the preceding page.

Part Number	NCP□□XV103	NCP□□XH153	NCP□□XW153	NCP□□XH223	NCP□□XW223	NCP□□WL223	NCPUWB333	NCP□□WF333
Resistance	10kΩ	15kΩ	15kΩ	22kΩ	22kΩ	22kΩ	33kΩ	33kΩ
B-Constant	3900K	3380K	3950K	3380K	3950K	4485K	4050K	4250K
Temp. (°C)	Resistance (kΩ)							
-40	328.996	293.478	517.912	430.434	759.605	1073.436	1227.263	1451.049
-35	237.387	222.256	371.724	325.976	545.196	753.900	874.449	1019.238
-30	173.185	170.021	270.048	249.364	396.070	535.073	630.851	725.084
-25	127.773	131.338	198.426	192.629	291.025	383.590	460.457	522.021
-20	95.327	102.355	147.278	150.121	216.008	277.643	339.797	379.842
-15	71.746	80.474	110.439	118.029	161.977	202.813	253.363	279.371
-10	54.564	63.759	83.617	93.514	122.638	149.462	190.766	207.566
-5	41.813	50.838	63.888	74.563	93.702	111.082	144.964	155.639
0	32.330	40.828	49.221	59.881	72.191	83.233	111.087	117.814
5	25.194	33.032	38.245	48.446	56.093	62.858	85.842	89.925
10	19.785	26.888	29.936	39.436	43.907	47.831	66.861	69.204
15	15.651	22.010	23.613	32.282	34.633	36.664	52.470	53.675
20	12.468	18.121	18.756	26.577	27.509	28.304	41.471	41.937
25	10.000	15.000	15.000	22.000	22.000	22.000	33.000	33.000
30	8.072	12.472	12.074	18.292	17.709	17.214	26.430	26.143
35	6.556	10.422	9.780	15.285	14.344	13.557	21.298	20.845
40	5.356	8.751	7.969	12.834	11.688	10.744	17.266	16.723
45	4.401	7.375	6.531	10.817	9.578	8.566	14.076	13.498
50	3.635	6.241	5.382	9.154	7.894	6.871	11.538	10.954
55	3.019	5.302	4.459	7.777	6.540	5.544	9.506	8.940
60	2.521	4.521	3.713	6.631	5.446	4.498	7.870	7.334
65	2.115	3.879	3.108	5.690	4.559	3.669	6.549	6.046
70	1.781	3.341	2.613	4.901	3.832	3.009	5.475	5.011
75	1.509	2.887	2.208	4.234	3.239	2.479	4.595	4.170
80	1.284	2.503	1.873	3.671	2.748	2.052	3.874	3.487
85	1.097	2.178	1.597	3.195	2.342	1.707	3.282	2.928
90	0.941	1.902	1.367	2.790	2.004	1.426	2.789	2.469
95	0.810	1.664	1.174	2.441	1.722	1.196	2.379	2.091
100	0.701	1.461	1.013	2.142	1.486	1.008	2.038	1.777
105	0.608	1.287	0.878	1.888	1.287	0.852	1.751	1.516
110	0.530	1.137	0.763	1.668	1.119	0.724	1.509	1.298
115	0.463	1.007	0.665	1.477	0.975	0.617	1.306	1.116
120	0.406	0.895	0.582	1.312	0.854	0.528	1.134	0.962
125	0.358	0.797	0.511	1.169	0.750	0.454	0.987	0.832

Part Number	NCP WL333	NCP□□WL473	NCPUWD683	NCP□□WF683	NCPUWL683	NCP□□WL104	NCP□□WL154	NCP□□WM154
Resistance	33kΩ	47kΩ	68kΩ	68kΩ	68kΩ	100kΩ	150kΩ	150kΩ
B-Constant	4485K	4485K	4150K	4250K	4485K	4485K	4485K	4500K
Temp. (°C)	Resistance (kΩ)							
-40	1610.154	2293.249	2735.359	2990.041	3317.893	4879.254	7318.881	7899.466
-35	1130.850	1610.605	1937.391	2100.247	2330.237	3426.818	5140.228	5466.118
-30	802.609	1143.110	1389.345	1494.113	1653.862	2432.149	3648.224	3834.499
-25	575.385	819.487	1008.014	1075.679	1185.641	1743.590	2615.385	2720.523
-20	416.464	593.146	738.978	782.705	858.168	1262.012	1893.018	1951.216
-15	304.219	433.281	547.456	575.674	626.875	921.875	1382.813	1415.565
-10	224.193	319.305	409.600	427.712	461.974	679.373	1019.059	1036.984
	166.623	237.312	309.217	320.710	343.345	504.919	757.379	767.079
0	124.850	177.816	235.606	242.768	257.266	378.333	567.499	572.667
5	94.287	134.287	180.980	185.300	194.287	285.717	428.575	431.264
10	71.747	102.184	140.139	142.603	147.841	217.414	326.121	327.405
15	54.996	78.327	109.344	110.602	113.325	166.654	249.981	250.538
20	42.455	60.467	85.929	86.415	87.484	128.653	192.979	193.166
25	33.000	47.000	68.000	68.000	68.000	100.000	150.000	150.000
30	25.822	36.776	54.167	53.871	53.208	78.247	117.370	117.281
35	20.335	28.962	43.421	42.954	41.903	61.622	92.433	92.293
40	16.115	22.952	35.016	34.460	33.208	48.835	73.252	73.090
45	12.849	18.301	28.406	27.814	26.477	38.937	58.406	58.240
50	10.306	14.679	23.166	22.572	21.237	31.231	46.846	46.665
55	8.317	11.845	18.997	18.422	17.137	25.202	37.803	37.605
60	6.748	9.610	15.657	15.113	13.904	20.448	30.671	30.453
65	5.504	7.839	12.967	12.459	11.342	16.679	25.018	24.804
70	4.513	6.427	10.794	10.325	9.299	13.675	20.513	20.293
75	3.718	5.296	9.021	8.592	7.662	11.268	16.902	16.679
80	3.078	4.384	7.575	7.185	6.343	9.329	13.993	13.776
85	2.560	3.646	6.387	6.033	5.276	7.758	11.638	11.428
90	2.139	3.046	5.407	5.087	4.407	6.481	9.721	9.520
95	1.794	2.555	4.598	4.309	3.697	5.437	8.155	7.966
100	1.511	2.152	3.922	3.661	3.114	4.580	6.869	6.688
105	1.278	1.820	3.359	3.124	2.634	3.873	5.810	5.639
110	1.085	1.546	2.887	2.675	2.236	3.289	4.933	4.772
115	0.925	1.318	2.489	2.299	1.907	2.804	4.206	4.052
120	0.792	1.128	2.155	1.983	1.632	2.400	3.601	3.454
125	0.681	0.970	1.870	1.715	1.403	2.064	3.096	2.955

Continued on the following page. 🖊

Temperature Sensor and Compensation Chip Type Temperature Characteristics (Center Value)

Continued from the preceding page.

Part Number	NCP□□WL224		NCDDDWM474
Resistance	220kΩ	220kΩ	470kΩ
B-Constant	4485K	4500K	4500K
Temp. (°C)	Resistance (kΩ)	Resistance (kΩ)	Resistance (kΩ)
-40	10734.358	11585.884	24751.661
-35	7539.001	8016.973	17127.169
-30	5350.729	5623.931	12014.762
-25	3835.898	3990.100	8524.305
-20	2776.427	2861.784	6113.811
-15	2028.126	2076.162	4435.437
-10	1494.620	1520.909	3249.216
-5	1110.822	1125.049	2403.515
0	832.332	839.912	1794.358
5	628.577	632.521	1351.294
10	478.310	480.194	1025.870
15	366.639	367.455	785.018
20	283.036	283.310	605.252
25	220.000	220.000	470.000
30	172.143	172.012	367.480
35	135.569	135.364	289.186
40	107.436	107.198	229.014
45	85.662	85.419	182.485
50	68.708	68.441	146.215
55	55.444	55.153	117.828
60	44.984	44.665	95.420
65	36.694	36.379	77.718
70	30.085	29.763	63.584
75	24.789	24.462	52.260
80	20.523	20.205	43.166
85	17.068	16.761	35.808
90	14.258	13.962	29.828
95	11.961	11.684	24.961
100	10.075	9.809	20.955
105	8.521	8.270	17.668
110	7.236	6.998	14.951
115	6.169	5.942	12.695
120	5.281	5.067	10.824
125	4.540	4.334	9.259

Resistance $10kΩ±0.5\%$ $10kΩ$ $47kΩ±0.5\%$ $47kΩ$ $100kΩ±0.5\%$ B-Constant $3380K$ $3380K$ $4050K$ $4050K$ $4250K$ Temp. (°C) Resistance (kΩ)	100kΩ 4250K esistance (kΩ) 4397.119 3088.599 2197.225 1581.881 1151.037 846.579 628.988 471.632
Temp. (°C) Resistance (kΩ) Resistance (k	esistance (kΩ) 4397.119 3088.599 2197.225 1581.881 1151.037 846.579 628.988
-40 197.390 195.652 1690.586 1747.920 4221.283 -35 149.390 148.171 1215.318 1245.428 2995.044 -30 114.340 113.347 882.908 898.485 2146.996 -25 88.381 87.559 647.911 655.802 1554.599 -20 68.915 68.237 480.069 483.954 1136.690 -15 54.166 53.650 359.009 360.850 839.019 -10 42.889 42.506 270.868 271.697 624.987 -5 34.196 33.892 206.113 206.463 469.678 0 27.445 27.219 158.126 158.214 355.975 5 22.165 22.021 122.267 122.259 272.011 10 18.010 17.926 95.256 95.227 209.489 15 14.720 14.674 74.754 74.730 162.559	4397.119 3088.599 2197.225 1581.881 1151.037 846.579 628.988
-35 149.390 148.171 1215.318 1245.428 2995.044 -30 114.340 113.347 882.908 898.485 2146.996 -25 88.381 87.559 647.911 655.802 1554.599 -20 68.915 68.237 480.069 483.954 1136.690 -15 54.166 53.650 359.009 360.850 839.019 -10 42.889 42.506 270.868 271.697 624.987 -5 34.196 33.892 206.113 206.463 469.678 0 27.445 27.219 158.126 158.214 355.975 5 22.165 22.021 122.267 122.259 272.011 10 18.010 17.926 95.256 95.227 209.489 15 14.720 14.674 74.754 74.730 162.559	3088.599 2197.225 1581.881 1151.037 846.579 628.988
-30 114.340 113.347 882.908 898.485 2146.996 -25 88.381 87.559 647.911 655.802 1554.599 -20 68.915 68.237 480.069 483.954 1136.690 -15 54.166 53.650 359.009 360.850 839.019 -10 42.889 42.506 270.868 271.697 624.987 -5 34.196 33.892 206.113 206.463 469.678 0 27.445 27.219 158.126 158.214 355.975 5 22.165 22.021 122.267 122.259 272.011 10 18.010 17.926 95.256 95.227 209.489 15 14.720 14.674 74.754 74.730 162.559	2197.225 1581.881 1151.037 846.579 628.988
-25 88.381 87.559 647.911 655.802 1554.599 -20 68.915 68.237 480.069 483.954 1136.690 -15 54.166 53.650 359.009 360.850 839.019 -10 42.889 42.506 270.868 271.697 624.987 -5 34.196 33.892 206.113 206.463 469.678 0 27.445 27.219 158.126 158.214 355.975 5 22.165 22.021 122.267 122.259 272.011 10 18.010 17.926 95.256 95.227 209.489 15 14.720 14.674 74.754 74.730 162.559	1581.881 1151.037 846.579 628.988
-20 68.915 68.237 480.069 483.954 1136.690 -15 54.166 53.650 359.009 360.850 839.019 -10 42.889 42.506 270.868 271.697 624.987 -5 34.196 33.892 206.113 206.463 469.678 0 27.445 27.219 158.126 158.214 355.975 5 22.165 22.021 122.267 122.259 272.011 10 18.010 17.926 95.256 95.227 209.489 15 14.720 14.674 74.754 74.730 162.559	1151.037 846.579 628.988
-15 54.166 53.650 359.009 360.850 839.019 -10 42.889 42.506 270.868 271.697 624.987 -5 34.196 33.892 206.113 206.463 469.678 0 27.445 27.219 158.126 158.214 355.975 5 22.165 22.021 122.267 122.259 272.011 10 18.010 17.926 95.256 95.227 209.489 15 14.720 14.674 74.754 74.730 162.559	846.579 628.988
-10 42.889 42.506 270.868 271.697 624.987 -5 34.196 33.892 206.113 206.463 469.678 0 27.445 27.219 158.126 158.214 355.975 5 22.165 22.021 122.267 122.259 272.011 10 18.010 17.926 95.256 95.227 209.489 15 14.720 14.674 74.754 74.730 162.559	628.988
-5 34.196 33.892 206.113 206.463 469.678 0 27.445 27.219 158.126 158.214 355.975 5 22.165 22.021 122.267 122.259 272.011 10 18.010 17.926 95.256 95.227 209.489 15 14.720 14.674 74.754 74.730 162.559	
0 27.445 27.219 158.126 158.214 355.975 5 22.165 22.021 122.267 122.259 272.011 10 18.010 17.926 95.256 95.227 209.489 15 14.720 14.674 74.754 74.730 162.559	471 632
5 22.165 22.021 122.267 122.259 272.011 10 18.010 17.926 95.256 95.227 209.489 15 14.720 14.674 74.754 74.730 162.559	T/ 1.002
10 18.010 17.926 95.256 95.227 209.489 15 14.720 14.674 74.754 74.730 162.559	357.012
15 14.720 14.674 74.754 74.730 162.559	272.500
	209.710
20 12.000 12.001 50.075 50.065 127.057	162.651
20 12.033 12.081 33.073 33.063 127.057	127.080
25 10.000 10.000 47.000 47.000 100.000	100.000
30 8.309 8.315 37.636 37.643 79.222	79.222
35 6.939 6.948 30.326 30.334 63.167	63.167
40 5.824 5.834 24.583 24.591 50.677	50.677
45 4.911 4.917 20.043 20.048 40.904	40.904
50 4.160 4.161 16.433 16.433 33.195	33.195
55 3.539 3.535 13.545 13.539 27.091	27.091
60 3.024 3.014 11.223 11.209 22.224	22.224
65 2.593 2.586 9.345 9.328 18.323	18.323
70 2.233 2.228 7.818 7.798 15.184	15.184
75 1.929 1.925 6.571 6.544 12.635	12.635
80 1.673 1.669 5.548 5.518 10.566	10.566
85 1.455 1.452 4.704 4.674 8.873	8.873
90 1.270 1.268 4.004 3.972 7.481	7.481
95 1.112 1.110 3.422 3.388 6.337	6.337
100 0.976 0.974 2.936 2.902 5.384	5.384
105 0.860 0.858 2.528 2.494 4.594	4.594
110 0.759 0.758 2.184 2.150 3.934	3.934
115 0.673 0.672 1.893 1.860 3.380	3.380
120 0.598 0.596 1.646 1.615 2.916	2.046
125 0.532 0.531 1.436 1.406 2.522	2.916

This product is designed for application in an ordinary environment (normal room temperature, humidity and atmospheric pressure).

Do not use under the following conditions because all of these factors can deteriorate the product characteristics or cause failures and burn-out.

 Corrosive gas or deoxidizing gas
 (Chlorine gas, Hydrogen sulfide gas, Ammonia gas, Sulfuric acid gas, Nitric oxide gas, etc.)

- 2. Volatile or flammable gas
- 3. Dusty conditions
- 4. Under vacuum, or under high or low pressure
- 5. Wet or humid locations
- 6. Places with salt water, oils, chemical liquids or organic solvents
- 7. Strong vibrations
- 8. Other places where similar hazardous conditions exist

∴ Caution (Others)

Be sure to provide an appropriate fail-safe function on your product to prevent secondary damage that may be caused by the abnormal function or the failure of our product.

Notice (Storage and Operating Conditions)

To keep the solderability of the product from degrading, the following storage conditions are recommended.

- 1. Storage condition:
 - Temperature -10 to +40°C Humidity less than 75%RH (not dewing condition)
- 2. Storage term:
 - Use this product within 6 months after delivery by first-in and first-out stocking system.
- 3. Storage place:
 - Do not store this product in corrosive gas (Sulfuric acid gas, Chlorine gas, etc.) or in direct sunlight.

Notice (Rating)

Use this product within the specified temperature range


Higher temperature may cause deterioration of the characteristics or the material quality of this product.

Notice (Handling)


The ceramic of this product is fragile, and care must be taken not to load an excessive press-force or to cause a shock at handling. Such forces may cause cracking or chipping.


Notice (Soldering and Mounting)


Mounting Position
 Choose a mounting position that minimizes the stress imposed on the chip during flexing or bending of the board.

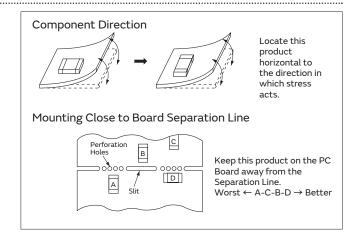

- 2. Allowable Soldering Temperature and Time
- (a) Solder within the temperature and time combinations indicated by the slanted lines in the following graphs.
- (b) Excessive soldering conditions may cause dissolution of metallization or deterioration of solder-wetting on the external electrode.
- (c) In case of repeated soldering, the accumulated soldering time should be within the range shown in the figure below. (For example, Reflow peak temperature: 260°C, twice -> The total accumulated soldering time at 260°C is within 30 seconds.)

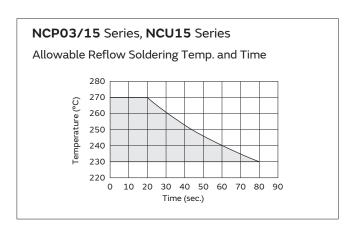







Continued on the following page. 7

Continued from the preceding page.

- 3. Recommended Temperature Profile for Soldering
- (a) Insufficient preheating may cause a crack on the ceramic body. The difference between preheating temperature and maximum temperature in the profile shall be 100 °C.
- (b) Rapid cooling by dipping in solvent or by other means is not recommended.
- * In case of repeated soldering, the accumulated soldering time should be within the range shown in the figure of section 2.

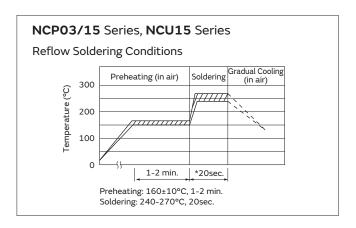

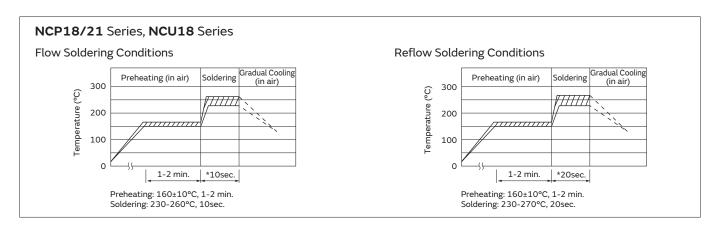

4. Solder and Flux

- (1) Solder and Paste
- (a) Reflow Soldering: NCP03/15/18/21 Series, NCU15/18 Series Use RA/RMA type or equivalent type of solder paste. For your reference, we use the solder paste below for any internal tests of this product.
 - •RMA9086 90-4-M20 (Sn:Pb=63wt%:37wt%) (Manufactured by Alpha Metals Japan Ltd.)
 - ●M705-221BM5-42-11 (Sn:Ag:Cu=96.5wt%:3.0wt%:0.5wt%) (Manufactured by Senju Metal Industry Co., Ltd.)
- (b) Flow Soldering: NCP18/21 Series, NCU18 Series We use the solder paste below for any internal tests of this product.
- 5. Cleaning Conditions

For removing the flux after soldering, observe the following points in order to avoid deterioration of the characteristics or any change of the external electrodes' quality.

- Please keep mounted parts and a substrate from an occurrence of resonance in ultrasonic cleaning.
- Please do not clean the products in the case of using a non-wash-type flux.

- •Sn:Pb=63wt%:37wt%
- •Sn:Ag:Cu=96.5wt%:3.0wt%:0.5wt%
- (2) Flux

Use rosin type flux in the soldering process. If the flux listed below is used, some problems might be caused in the product characteristics and reliability. Please do not use the following flux.

- Strong acidic flux (with halide content exceeding 0.1wt%).
- Water-soluble flux
 (*Water-soluble flux can be defined as non-rosin type
 flux including wash-type flux and non-wash-type flux.)


	NCP03/15, NCU15	NCP18/21, NCU18
Solvent	Isopropyl Alcohol	Isopropyl Alcohol
Dipping Cleaning	Less than 5 minutes at room temp. or less than 2 minutes at 40°C max.	Less than 5 minutes at room temp. or less than 2 minutes at 40°C max.
Ultrasonic Cleaning	Less than 5 minutes and 20W/ ℓ Frequency of 28kHz to 40kHz	Less than 1 minute and 20W/ ℓ Frequency of several 10kHz to 100kHz

Drying

After cleaning, promptly dry this product.

Continued from the preceding page.

- 7. Printing Conditions of Solder Paste
- The amount of solder is critical. Standard height of fillet is shown in the table below.
- Too much solder may cause mechanical stress, resulting in cracking, mechanical and/or electronic damage.

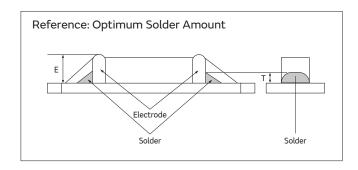

Part Number	Solder Paste Thickness	Т
NCP03	100µm	1/3E≦T≦E
NCP15, NCU15	150µm	1/3E≦T≦E
NCP18/NCP21, NCU18	200µm	0.2mm≦T≦E

- 8. Adhesive Application and Curing
- Thin or insufficient adhesive may result in loose component contact with land during flow soldering.
- Low viscosity adhesive causes chips to slip after mounting.


Temperature Sensor and Compensation Chip Type Package

Minimum Quantity Guide

David November	Quantity (pcs.)				
Part Number	Paper Tape	Embossed Tape			
NCP03	15000				
NCP15, NCU15	10000	-			
NCP18, NCU18	4000				
NCP21	-	4000			


Tape Carrier Packaging

1. Dimensions of Reel

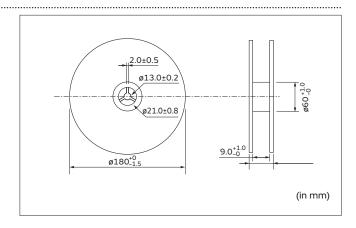

2. Taping Method

- (1) A tape in a reel contains Leader unit and Trailer unit where products are not packed. (Please refer to the figure at the right.)
- (2) The top and base tapes or plastic and cover tape are not stuck at the first five pitches minimum.
- (3) A label should be attached on the reel. (MURATA's part number, inspection number and quantity should be marked on the label.)
- (4) Taping reels are packed in a package.




Continued on the following page. 7

Temperature Sensor and Compensation Chip Type Package

Continued from the preceding page.

3. Paper Tape (NCP03/15/18 Series, NCU15/18 Series)

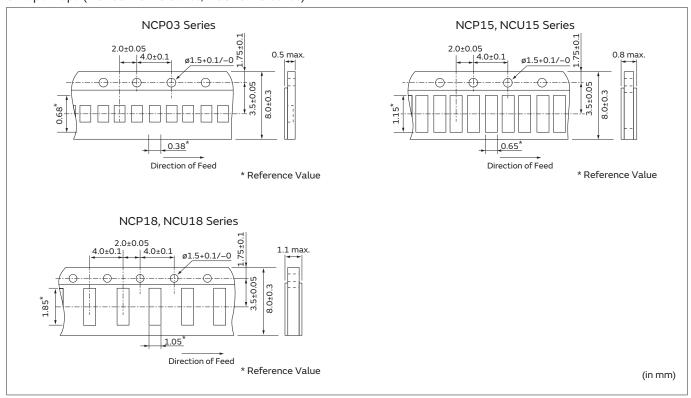

(1) Other Conditions


(a) Packaging

Products are packaged in the cavity of the base tape and sealed by a top tape and bottom tape.

(b) Tape

The top tape and bottom tape have no joints and products are packaged and sealed in the cavity of the base tape, continuously.

(2) Peeling Force of Top Tape

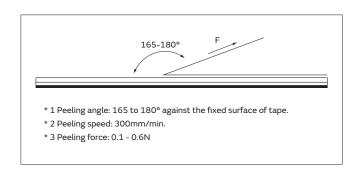

(3) Pull Strength

Pull strength of top tape is specified at 10N minimum. Pull strength of bottom tape should be specified 5N minimum.

Continued on the following page. **7**

Temperature Sensor and Compensation Chip Type Package


Continued from the preceding page.

- 4. Embossed Tape (NCP21 Series)
- (1) Other Conditions
 - (a) Packaging


Products are packaged in the each cavity of Embossed tape and sealed by Cover tape.

(b) Tape

Cover tape has no joints.

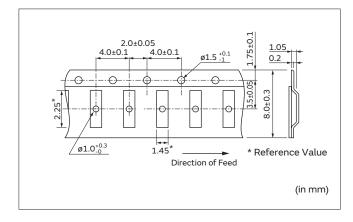

(2) Peeling Force of Cover Tape



- * 1 Peeling angle: 165 to 180° against the fixed surface of tape.
- * 2 Peeling speed: 300mm/min.
- * 3 Peeling force: 0.1 0.7N

(3) Tape Strength
Pull strength of Embossed tape and Cover tape should be
specified 10N minimum.

● Temperature Sensor Thermo String Type

This product is a small flexible lead type NTC Thermistor with a small head and a thin lead wire.


Features

- 1. This small and highly accurate NTC Thermistor provides extremely precise temperature sensing.
- 2. The small sensing head and thin lead wire deliver temperature sensing in a narrow space.
- Flexibility and a wide variety of lengths (25mm to 150mm)
 enable the design of flexible temperature sensing architectures.
- 4. This product is compatible with our 0402 (EIA) size chip Thermistor.
- 5. Excellent long-term stability
- 6. This is a halogen free product. *
 - * Cl= max.900ppm, Br=max.900ppm and Cl+Br=max.1500ppm
- 7. NXFT series are recognized by UL/cUL. (UL1434, File No.E137188).


Applications

- Temperature compensation for transistors, ICs, and crystal oscillators in mobile communications
- 2. Temperature sensor for rechargeable batteries
- 3. Temperature compensation of LCD
- 4. Temperature compensation in general use of electric circuits





NXFT15_1B Type (twist)



NXFT15_2B Type (without twist)

Detailed are accessable from the following URL. http://www.murata.com/en-global/products/thermistor/ntc/nxf

Part Number	Resistance (25°C) (ohm)	B-Constant (25-50°C) (K)	B-Constant (25-80°C) (Reference Value) (K)	B-Constant (25-85°C) (Reference Value) (K)	B-Constant (25-100°C) (Reference Value) (K)	Operating Current for Sensor (25°C) (mA)	Rated Electric Power (25°C) (mW)	Typical Dissipation Constant (25°C) (mW/°C)	Thermal Time Constant (25°C) (s)
NXFT15XH103FA B	10k ±1%	3380 ±1%	3428	3434	3455	0.12	7.5	1.5	4
NXFT15XV103FA B	10k ±1%	3936 ±1%	3971	3977	3988	0.12	7.5	1.5	4
NXFT15WB473FA B	47k ±1%	4050 ±1%	4101	4108	4131	0.06	7.5	1.5	4
NXFT15WF104FA B	100k ±1%	4250 ±1%	4303	4311	4334	0.04	7.5	1.5	4

☐ is filled with lead shape (1: twist, 2: without twist).

 $\Box\Box\Box$ is filled with Total-length codes. (25mm, 30 to 150mm interval 10mm, ex. 050=50mm)

Operating Current for Sensor rises Thermistor's temperature by 0.1°C

Rated Electric Power shows the required electric power that the thermistor's temperature rise to 30°C by self-heating, at ambient temperature of 25 °C. Operating Temperature Range: -40°C to +125°C

Temperature Sensor Thermo String Type Specifications and Test Methods

No.	ltem	Specifications	Test Methods				
1	High Temperature Storage Test	· Resistance (R25°C) fluctuation rate: less than ±1%.	125±2°C in air, for 1000 +48/-0 hours without loading.				
2	Low Temperature Storage Test	· B-Constant (B25/50°C) fluctuation rate: less than ±1%.	-40 +0/-3°C in air, for 1000 +48/-0 hours without loading.				
3	Humidity Storage Test		60±2°C, 90 to 95%RH in air, for 1000 +48/-0 hours without loading.				
4	Temperature Cycle	· Resistance (R25°C) fluctuation rate: less than ±2%. · B-Constant (B25/50°C) fluctuation rate: less than ±1%.	-40 +0/-3°C, 30 minutes in air +25±2°C, 10 to 15 minutes in air +125±2°C, 30 minutes in air +25 +2/-0°C, 10 to 15 minutes in air (1 cycle) Continuous 100 cycles, without loading.				
5	High Temperature Load		85±2°C in air, with 'Operating Current for Sensor' for 1000 +48/-0 hrs.				
6	Insulation Break - down Voltage	· No damage electrical characteristics at DC100 V, 1 min.	2mm length of coating resin from the top of Thermistor is to be dipped into beads of lead (Pb), and DC100V 1 minute is applied to circuit between beads of lead (Pb) and lead wire.				
7	Resistance to Soldering Heat	· Resistance (R25°C) fluctuation rate: less than ±1%. · B-Constant (B25/50°C) fluctuation rate: less than ±1%.	Both lead wires are dipped into 350±10°C solder for 3.5±0.5 seconds, or 260±5°C solder for 10±1 seconds according to Fig-1 (solder <jis 3282="" snagcu="" z="">).</jis>				
8	Solderability	More than 90% of lead wire surface shall be covered by solder.	Both lead wires are dipped into flux (25wt% colophony <jis 5902="" k=""> isopropyl alcohol <jis 8839="" k="">) for 5 to 10 seconds. Then both lead wires are dipped into 245±5°C solder <jis 3282="" snagcu="" z=""> for 2±0.5 seconds according to Fig-1.</jis></jis></jis>				
9	Lead Wire Pull Strength	Resistance (R25°C) fluctuation rate: less than ±1%. B-Constant (B25/50°C) fluctuation rate: less than ±1%.	The lead wire shall be inserted in a ø1.0mm hole until resin part contacts with a substrate as shown in fig2, and 1N force for 10 seconds shall be applied to the lead wire. IN (10 sec.) Fig-2				
10	Lead Wire Bending Strength	· Lead wire does not break.	Hold the lead wires as in Fig-3. Bend by 90 degrees and again bend back to the initial position. Then bend to the other side by 90 degrees and again bend back to the initial position. After bending process, 10N force for 3 seconds shall be applied to the lead wire. Fig-3				

- * \cdot R25 is zero-power resistance at 25°C.
 - · B25/50 is calculated by zero-power resistance of Thermistor in 25°C-50°C.
 - $\cdot \text{ After each test, NTC Thermistor should be kept for 1 hour at room temperature (normal humidity and normal atmospheric pressure)}.$

Continued on the following page. 🖊

Temperature Sensor Thermo String Type Specifications and Test Methods

Continued from the preceding page.

No.	Item	Specifications	Test Methods					
11	Free Fall		NTC Thermistor shall be dropped without any force onto concrete floor from 1 meter height one time.					
12	Vibration	· Resistance (R25°C) fluctuation rate: less than ±1%. · B-Constant (B25/50°C) fluctuation rate: less than ±1%. · No visible damage at resin part.	NTC Thermistor shall be fixed to the vibration test equipment. Vibration of total 1.5 mm amplitude, Frequency sequence of 10Hz - 55Hz - 10Hz in 1 minute shall be applied for right angled 3 directions for 2 hours duration each. Mount					

- * · R25 is zero-power resistance at 25°C.
- · B25/50 is calculated by zero-power resistance of Thermistor in 25°C-50°C.
- · After each test, NTC Thermistor should be kept for 1 hour at room temperature (normal humidity and normal atmospheric pressure).

■ Temperature Sensor Lead Type


This thermistor is for normal temperature level sensors having self-subsistence due to strong lead strength based on chip NTC.

Features

- 1. This highly accurate NTC Thermistor provides extremely precise temperature sensing.
- 2. This product is compatible with 1005 (1.0mm \times 0.5mm) size NTC Thermistor.
- 3. The variation per hour of this product is highly stable.
- 4. This product is produced with an automation line that was consistent from lead to packaging so that a product of uniform quality may be obtained at low cost in large quantities.
- 5. Since this product has strong lead intensity with original lead mounting technique, it is bent at the time of use and can withstand processing, etc., readily. Taping package can be supported.

Applications

- 1. For temperature detection of a rechargeable battery pack
- 2. For temperature detection of a charge circuit
- 3. For temperature detection of a printer head
- 4. For temperature detection of a DC fan motor
- 5. For temperature detection of home electronics



Detailed are accessable from the following URL. http://www.murata.com/en-global/products/thermistor/ntc/nxr

Part Number	Resistance (25°C) (ohm)	B-Constant (25-50°C) (K)	B-Constant (25-80°C) (Reference Value) (K)	B-Constant (25-85°C) (Reference Value) (K)		Operating Current for Sensor (25°C) (mA)	Rated Electric Power (25°C) (mW)	Typical Dissipation Constant (25°C) (mW/°C)	Thermal Time Constant (25°C) (s)
NXRT15XM202EA1B	2k ±3%	3500 ±1.5%	3539	3545	3560	0.27	7.5	1.5	4
NXRT15XV502FA1B	5k ±1%	3936 ±1%	3972	3977	3989	0.17	7.5	1.5	4
NXRT15XH103FA1B	10k ±1%	3380 ±1%	3428	3434	3455	0.12	7.5	1.5	4
NXRT15XV103FA1B	10k ±1%	3936 ±1%	3971	3977	3988	0.12	7.5	1.5	4
NXRT15WB333JA1B	33k ±5%	4050 ±3%	4101	4108	4131	0.07	7.5	1.5	4
NXRT15WB473FA1B	47k ±1%	4050 ±1%	4101	4108	4131	0.06	7.5	1.5	4
NXRT15WF104FA1B	100k ±1%	4250 ±1%	4303	4311	4334	0.04	7.5	1.5	4

 $\Box\Box\Box$ is filled with Total-length codes. (10 to 40mm interval 10mm, ex. 040=40mm)

Operating Current for Sensor rises Thermistor's temperature by 0.1°C.

 $Rated\ Electric\ Power\ is\ necessary\ electric\ power\ that\ thermistor's\ temperature\ rises\ 5^\circ C\ by\ self-heating\ at\ 25^\circ C\ in\ still\ air.$

Taping type of part numbers with "3A016" is available (Lead Spacing=5mm).

Operating Temperature Range: -40°C to +125°C

Temperature Sensor Lead Type Specifications and Test Methods

No.	Item	Specifications	Test Methods						
1	Low Temperature Storage Test	· Resistance (R25°C) fluctuation rate: less than ±1%.	-40 +0/-3°C in air, for 1000 +48/-0 hours without loading.						
2	High Temperature Storage Test	· B-Constant (B25/50°C) fluctuation rate: less than ±1%.	125±2°C in air, for 1000 +48/-0 hours without loading.						
3	High Temperature Load		85±2°C in air, with 'Operating Current for Sensor' for 1000 +48/-0 hrs.						
4	Humidity Storage Test	· Resistance (R25°C) fluctuation rate: less than ±2%.	60±2°C, 90 to 95%RH in air, for 1000 +48/-0 hours without loading.						
5	Temperature Cycle	B-Constant (B25/50°C) fluctuation rate: less than ±1%.	-40°C +0/-3°C, 30 minutes in air +25°C±2°C, 10 to 15 minutes in air +125°C +3/-0°C, 30 minutes in air +25°C +2/-0°C, 10 to 15 minutes in air (1 cycle) Continuous 100 cycles, without loading.						
6	Insulation Break - down Voltage	· No damage electrical characteristics on D.C.100 V, 1 min.	2mm length of coating resin from the top of thermistor is to be dipped into beads of lead (Pb), and DC100V 1 minute is applied to circuit between beads of lead (Pb) and lead wire.						
7	Resistance to Soldering Heat	· Resistance (R25°C) fluctuation rate: less than ±1%. · B-Constant (B25/50°C) fluctuation rate: less than ±1%.	Both lead wires are dipped into 350±10°C solder for 3.5±0.5 seconds, or 260±5°C solder for 10±1 seconds according to Fig-1. (solder <sn-3ag-0.5cu>) Solder Fig-1</sn-3ag-0.5cu>						
8	Solderability	More than 90% of lead wire surface shall be covered by solder.	Both lead wires are dipped into flux (25wt% colophony <jis 5902="" k=""> isopropyl alcohol <jis 8839="" k="">) for 5 to 10 seconds. Then both lead wires are dipped into 245±5°C solder <sn-3ag-0.5cu> for 2±0.5 seconds according to Fig-1.</sn-3ag-0.5cu></jis></jis>						
9	Lead Wire Pull Strength	· Resistance(R25°C) fluctuation rate: less than ±1%. · B-Constant(B25/50°C) fluctuation rate: less than ±1%. · No visible damage at resin part.	One end of a lead wire shall be fixed and 2.5N force for 10 seconds shall be applied to the other lead wire as shown in Fig-2. 2.5N (10sec.) Fig-2						
10	Lead Wire Bending Strength	· Lead wire does not break.	One lead wire is held and 2.5N force is applied. Then the body of NTC thermistor is bent by 90° and again bent back to the initial position. This sequence shall be completed twice. See Fig-3. 2.5N Fig-3						
11	Free Fall		NTC thermistor shall be dropped without any force onto concrete floor from 1 meter height one time.						
12	Vibration	Resistance (R25°C) fluctuation rate: less than ±1%. B-Constant (B25/50°C) fluctuation rate: less than ±1%. No visible damage at resin part.	NTC thermistor shall be fixed to the vibration test Equipment. Vibration of total 1.5mm amplitude, Frequency sequence of 10Hz – 55Hz – 10Hz in 1 minute, shall be applied for right angled 3 directions for 2 hours duration each.						

- * \cdot R25 is zero-power resistance at 25°C.
 - $\cdot\,$ B25/50 is calculated by zero-power resistance of Thermistor in 25°C-50°C.
 - $\cdot \ \, \text{After each test, NTC Thermistor should be kept for 1 hour at room temperature (normal humidity and normal atmospheric pressure)}.$

■ Temperature Sensor Lead Insulation Type


This thermistor is for normal temperature level sensors having self-subsistence due to strong lead strength based on chip NTC.

Features

- 1. NXR series can accurately detect temperature with NCP15 series on the head of parts.
- 2. The insulation coat with polyulethane on the surface of lead wire: 100VDC.
- 3. You can choose NTC characteristics from NCP15 series.
- 4. The resistance drift is low in the reliability test.
- 5. The production capacity is bigger and NXR is produced almost entirely in an automation line.
- 6. Adopt to Sb regulation

Applications

- 1. Secondary battery
- 2. Temperature detection for charging
- 3. Temperature detection for DC fan motor
- 4. Temperature sensing for appliance
- 5. Self-standing temperature sensing for fire detector



Detailed are accessable from the following URL. http://www.murata.com/en-global/products/thermistor/ntc/nxr

Part Number	Resistance (25°C) (ohm)	B-Constant (25-50°C) (K)	B-Constant (25-80°C) (Reference Value) (K)	B-Constant (25-85°C) (Reference Value) (K)		Operating Current for Sensor (25°C) (mA)	Rated Electric Power (25°C) (mW)	Typical Dissipation Constant (25°C) (mW/°C)	Thermal Time Constant (25°C) (s)
NXRT15XM202EA5B	2k ±3%	3500 ±1.5%	3539	3545	3560	0.36	13	2.6	4
NXRT15XV502FA5B	5k ±1%	3936 ±1%	3972	3977	3989	0.22	13	2.6	4
NXRT15XH103FA5B□□□	10k ±1%	3380 ±1%	3428	3434	3455	0.16	13	2.6	4
NXRT15XV103FA5B□□□	10k ±1%	3936 ±1%	3971	3977	3988	0.16	13	2.6	4
NXRT15WB333JA5B	33k ±5%	4050 ±3%	4101	4108	4131	0.08	13	2.6	4
NXRT15WB473FA5B	47k ±1%	4050 ±1%	4101	4108	4131	0.07	13	2.6	4
NXRT15WF104FA5B	100k ±1%	4250 ±1%	4303	4311	4334	0.05	13	2.6	4

 $\square\square\square$ is fulled with Total-length codes. (25 to 35mm interval 5mm, ex. 030=30mm)

Operating Current for Sensor rises Thermistor's temperature by 0.1°C.

 $Rated\ Electric\ Power\ is\ necessary\ electric\ power\ that\ thermistor's\ temperature\ rises\ 5^{\circ}C\ by\ self-heating\ at\ 25^{\circ}C\ in\ still\ air.$

Operating Temperature Range: -40°C to +125°C

Temperature Sensor Lead Insulation Type Specifications and Test Methods

		5 15 11	
No.	Item	Specifications	Test Methods
1	Resistance to Soldering Heat (Flow)	· Resistance (R25°C) fluctuation rate: less than ±1%. · B-Constant (B25/50°C) fluctuation rate: less than ±1%.	Both lead wires are dipped into 350±10°C solder for 3.5±0.5 seconds, or 260±5°C solder for 10±1 seconds according to Fig-1. (solder <snagcu>) Solder Fig-1</snagcu>
2	Solderability (Flow)	· More than 90% of lead wsire surface shall be covered by solder.	Both lead wires are dipped into flux (25wt% colophony <jis 5902="" k=""> isopropyl alcohol <jis 8839="" k="">) for 5 to 10 seconds. Then both lead wire are dipped into 245±5°C solder <snagcu> for 2±0.5 seconds according to Fig-1.</snagcu></jis></jis>
3	Lead Wire Breaking Strength	· Resistance (R25°C) fluctuation rate: less than ±1%. · B-Constant (B25/50°C) fluctuation rate: less than ±1%.	One end of a lead wire shall be fixed and 2.5N force for 10 seconds shall be applied to the other lead wire as shown in Fig-2. 2.5N (10sec.) Fig-2
4	Lead Wire Bending Strength	· Lead wire does not break.	One lead wire is held and 2.5N force is applied. Then the body of NTC thermistor is bent by 90° and again bent back to the initial position. This sequence shall be completed twice. See Fig-3.
5	Free Fall		NTC thermistor shall be dropped without any force onto concrete floor from 1 meter height one time.
6	Vibration	 Resistance (R25°C) fluctuation rate: less than ±1%. B-Constant (B25/50°C) fluctuation rate: less than ±1%. No visible damage at resin part. 	NTC thermistor shall be fixed to the vibration test equipment. Vibration of total 1.5 mm amplitude, frequency sequence of 10Hz - 55Hz - 10Hz in 1 minute, shall be applied for right angled 3 directions for 2 hours duration each.
7	Cold	· Resistance (R25°C) fluctuation rate: less than ±1%.	-40 +0/-3°C in air, for 1000 +48/-0 hours without loading.
8	Dry Heat	· B-Constant (B25/50°C) fluctuation rate: less than ±1%.	125±2°C in air, for 1000 +48/-0 hours without loading.
9	High Temperature with Continuous Load		85±2°C in air, with 'Operating Current for Sensor' for 1000 +48/-0 hrs.
10	Damp Heat	· Resistance (R25°C) fluctuation rate: less than ±2%.	60±2°C, 90 to 95%RH in air, for 1000 +48/-0 hours without loading.
11	Change of Temperature	· B-Constant (B25/50°C) fluctuation rate: less than ±1%.	-40°C +0/-3°C, 30 minutes in air +25°C±2°C, 10 to 15 minutes in air +125°C +3/-0°C, 30 minutes in air +25°C +2/-0°C, 10 to 15 minutes in air (1 cycle) Continuous 100 +4/-0 cycles, without loading.
12	Dielectric Breakdown Voltage	· No damage electrical characteristics on D.C.100V, 1 min.	2mm length of coating resin from the top of thermistor is to be dipped into beads of lead (Pb), and DC100V 1 minute is applied to circuit between beads of lead (Pb) and lead wire.

Temperature Sensor Thermo String/Lead Type Temperature Characteristics (Center Value)

Part Number	NXFT15XH103	NXFT15XV103	NXFT15WB473	NXFT15WF104
Resistance	10kΩ	10kΩ	47kΩ	100kΩ
B-Constant	3380K	3936K	4050K	4250K
Temp. (°C)	Resistance (kΩ)	Resistance (kΩ)	Resistance (kΩ)	Resistance (kΩ)
-40	197.388	337.503	1690.590	4221.280
-35	149.395	243.332	1215.320	2995.040
-30	114.345	177.496	882.908	2147.000
-25	88.381	130.859	647.911	1554.600
-20	68.915	97.428	480.069	1136.690
-15	54.166	73.230	359.009	839.019
-10	42.889	55.529	270.868	624.987
-5	34.196	42.467	206.113	469.678
0	27.445	32.747	158.126	355.975
5	22.165	25.450	122.267	272.011
10	18.010	19.932	95.256	209.489
15	14.720	15.727	74.754	162.559
20	12.099	12.498	59.075	127.057
25	10.000	10.000	47.000	100.000
30	8.309	8.054	37.636	79.222
35	6.939	6.529 30.326		63.167
40	5.824	5.324	24.583	50.677
45	4.911	4.366		
50	4.160	3.601	16.433	33.195
55	3.539	2.985	13.545	27.091
60	3.024	2.488	11.223	22.224
65	2.593	2.083	9.345	18.323
70	2.233	1.752	7.818	15.184
75	1.929	1.480	6.571	12.635
80	1.673	1.256	5.548	10.566
85	1.455	1.070	4.704	8.873
90	1.270	0.916	4.004	7.481
95	1.112	0.787	3.422	6.337
100	0.976	0.679	2.936	5.384
105	0.860	0.588	2.528	4.594
110	0.759	0.512	2.184	3.934
115	0.673	0.446	1.893	3.380
120	0.598	0.391	1.646	2.916
125	0.532	0.343	1.436	2.522

Part Number	NXRT15XM202	NXRT15XV502	NXRT15XH103	NXRT15XV103	NXRT15WB333	NXRT15WB473	NXRT15WF104
Resistance	2.0kΩ	5.0kΩ	10kΩ	10kΩ	33kΩ	47kΩ	100kΩ
B-Constant	3500K	3936K	3380K	3936K	4050K	4050K	4250K
Temp. (°C)	Resistance (kΩ)						
-40	44.981	168.752	195.652	337.503	1227.263	1747.920	4397.119
-35	33.671	121.666	148.171	243.332	874.449	1245.428	3088.599
-30	25.444	88.748	113.347	177.496	630.851	898.485	2197.225
-25	19.417	65.430	87.559	130.859	460.457	655.802	1581.881
-20	14.955	48.714	68.237	97.428	339.797	483.954	1151.037
-15	11.619	36.615	53.650	73.230	253.363	360.850	846.579
-10	9.097	27.764	42.506	55.529	190.766	271.697	628.988
-5	7.178	21.233	33.892	42.467	144.964	206.463	471.632
0	5.707	16.374	27.219	32.747	111.087	158.214	357.012
5	4.568	12.725	22.021	25.450	85.842	122.259	272.500
10	3.682	9.966	17.926	19.932	66.861	95.227	209.710
15	2.986	7.864	14.674	15.727	52.470	74.730	162.651
20	2.437	6.249	12.081	12.498	41.471	59.065	127.080
25	2.000	5.000	10.000	10.000	33.000	47.000	100.000
30	1.651	4.027	8.315	8.054	26.430	37.643	79.222
35	1.370	3.264	6.948	6.529	21.298	30.334	63.167
40	1.143	2.662	5.834	5.324	17.266	24.591	50.677
45	0.958	2.183	4.917	4.366	14.076	20.048	40.904
50	0.807	1.801	4.161	3.601	11.538	16.433	33.195
55	0.682	1.493	3.535	2.985	9.506	13.539	27.091
60	0.580	1.244	3.014	2.488	7.870	11.209	22.224
65	0.495	1.041	2.586	2.083	6.549	9.328	18.323
70	0.424	0.876	2.228	1.752	5.475	7.798	15.184
75	0.365	0.740	1.925	1.480	4.595	6.544	12.635
80	0.315	0.628	1.669	1.256	3.874	5.518	10.566
85	0.273	0.535	1.452	1.070	3.282	4.674	8.873
90	0.237	0.458	1.268	0.916	2.789	3.972	7.481
95	0.207	0.394	1.110	0.787	2.379	3.388	6.337
100	0.181	0.340	0.974	0.679	2.038	2.902	5.384
105	0.160	0.294	0.858	0.588	1.751	2.494	4.594
110	0.141	0.256	0.758	0.512	1.509	2.150	3.934
115	0.124	0.223	0.672	0.446	1.306	1.860	3.380
120	0.110	0.195	0.596	0.391	1.134	1.615	2.916
125	0.098	0.172	0.531	0.343	0.987	1.406	2.522

Temperature Sensor Thermo String/Lead Type (1) Caution/Notice

(Caution (Storage and Operating Conditions)

This product is designed for application in an ordinary environment (normal room temperature, humidity and atmospheric pressure).

Do not use under the following conditions because all of these factors can deteriorate the product

characteristics or cause failures and burn-out.

Corrosive gas or deoxidizing gas
 (Chlorine gas, Hydrogen sulfide gas, Ammonia gas,
 Sulfuric acid gas, Nitric oxide gas, etc.)

- 2. Volatile or flammable gas
- 3. Dusty conditions
- 4. Under vacuum, or under high or low pressure
- 5. Wet or humid locations
- 6. Places with salt water, oils, chemical liquids or organic solvents
- 7. Strong vibrations
- 8. Other places where similar hazardous conditions exist

∴ Caution (Others)

Be sure to provide an appropriate fail-safe function on your product to prevent secondary damage that may be caused by the abnormal function or the failure of our product.

Notice (Storage and Operating Conditions)

To keep the solderability of the product from degrading, the following storage condition is recommended.

- 1. Storage condition:
- Temperature -10 to +40°C Humidity less than 75%RH (not dewing condition)
- 2. Storage term:

Use this product within 6 months after delivery by first-in and first-out stocking system.

- Handling after unpacking:
 After unpacking, reseal product promptly or store it in a sealed container with a drying agent.
- 4. Storage place:

Do not store this product in corrosive gas (Sulfuric acid gas, Chlorine gas, etc.) or in direct sunlight.

Notice (Rating)

Use this product within the specified temperature range.

Higher temperature may cause deterioration of the characteristics or the material quality of this product.

Notice (Soldering and Mounting) NXF Series

Please note as shown below when you mount this product.

- 1. Do not melt the solder in the resin head when you solder this product. If you do so, there is a possibility of wire breakage, electric short mode failure and wire coating breakage. If you cut the lead wire of this product less than 20mm from the resin head, the heat of the melted solder at the lead wire edge is propagated easily to the resin head along the lead wire.
- 2. Do not touch the resin head directly with the soldering iron. It may cause the melting of solder in the resin head.
- 3. Do not separate the parallel lead wires 10mm or less from the resin.
- 4. If you mold this product with resin, please evaluate the quality of this product before you use it.
- 5. Do not bend the lead wire radius 1mm or more.

Continued on the following page. 7

Temperature Sensor Thermo String/Lead Type (1) Caution/Notice

Continued from the preceding page.

Notice (Soldering and Mounting) NXR Series

Please note as shown below when you mount this product.

- Do not melt the solder in the resin head, when you solder this product. If you melt the solder in resin the head, the wire could break and short.
 - If you cut the lead wire of this product less than 8mm from the resin head, the heat of the melted solder at the lead wire edge is propagated easily to the resin head along the lead wire. Please do not cut this product below 9mm.
- 2. Do not touch the resin head directly with the solder iron. It may cause the melting of solder in the resin head.
- 3. If you mold this product with resin, please evaluate the quality of this product before you use it.

Notice (Soldering and Mounting) NXR Series (Insulation Type)

Please note as shown below when you mount this product.

- Do not melt the solder in the resin head when you solder this product. (more than 25mm in full length of the product).
 - If you melt the solder in the resin head, it has posibility that the wire could break and short.
- 2. Do not touch the resin head directly with the solder iron. It may cause the melting of solder in the resin head.
- 3. When additional processing is carried out on this product (such as bonding, resin molding, and resin coating, etc.), please perform an audit of quality level on an automated machine and only use the product after confirming its reliability.

Please talk to us if you have concern matter, like process it under the high temperature and the high pressure.

(For example, exposed to high-temperature and high-pressure environment as mold sealing with injection molding.)

Notice (Handling) NXF/NXR Series

- The ceramic element of this product is fragile, and care must be taken not to load an excessive press-force or not to cause a shock at handling.
 Such forces may cause cracking or chipping.
- Do not apply excessive force to the lead.
 Otherwise, it may cause the junction between lead and element to break or crack. Holding the element by the side lead wire is recommended when lead wire is bent or cut.

Notice (Handling) NXR Series (Insulation Type)


- The ceramic element of this product is fragile, and care must be taken not to load an excessive press-force or not to cause a shock at handling.
 Such forces may cause cracking or chipping.
 Especially under high-temperature environment, there is a possibility that epoxy resin will become soft.
 When you set up the processing environment, please examine the processing method after evaluating the quality of this product.
- 2. Do not apply excessive force to the lead. Otherwise, it may cause the junction between lead and element to break or crack. Holding the element by the side lead wire is recommended when lead wire is bent or cut. Handle the lead with care; there is a possibility that a crack may go into the polyurethane insulated coat when bending the lead.

Temperature Sensor Thermo String/Lead Type Package

Minimum Order Quantity

	Bulk	Ammo Pack Taping		
Part Number Minimum Quantity (pcs.)		Part Number	Minimum Quantity (pcs.)	
NXF	1000	-	-	
NXR	500	NXRT_3A016	2500	

Taping Dimensions (NXRT_3A016 Series)

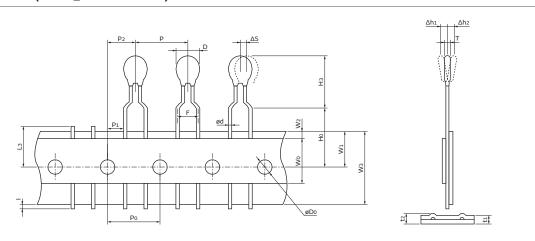

ltem	Code	Dimensions (mm)
Pitch of Component	Р	12.7±1.0
Pitch of Sprocket Hole	Po	12.7±0.3
Lead Spacing	F	5.0±1.0
Length from Hole Center to Component Center	P ₂	6.35±1.3
Length from Hole Center to Lead	P1	3.85±0.7
Body Diameter	D	4.0 max.
Deviation Along Tape, Left or Right	ΔS	0±2.0
Carrier Tape Width	W3	18.0±0.5
Position of Sprocket Hole	W1	9.0±0.5
Lead Distance between Reference and Bottom Planes	Ho	16.0±1.0
Height of Component	Нз	7.5±1.0
Protrusion Length	I	+0.5 to -1.0
Diameter of Sprocket Hole	øDo	4.0±0.1
Lead Diameter	ød	0.40±0.05
Total Tape Thickness	t1	0.6±0.3
Total Thickness, Tape and Lead Wire	t2	1.6 max.
Deviation Across Tape	Δh1, Δh2	1.0 max.
Portion to Cut in Case of Defect	L3	11.0+0
Hold down Tape Width	Wo	9.5 min.
Hold down Tape Position	W2	1.5±1.5
Thickness	Т	2.0 max.

This product effectively supresses surge currents that are generated when switching power regulators are turned on.


Features

- Lead is not contained in the ceramic element, the terminations, the solder for inner connection and the coating resin.
- 2. Most suitable for power supplies of less than 100W
- 3. Excellent recovery characteristics due to resin coating with excellent heat characteristics
- 4. Highly reliable

Applications


- 1. Switching power supplies
- 2. CRT monitors
- 3. Color televisions
- 4. VCR power supplies
- 5. Other power circuits






(in mm)





(in mm)





(in mm)

Detailed are accessable from the following URL. http://www.murata.com/en-global/products/thermistor/ntc/ntp

Part Number	Resistance (25°C) (ohm)	Permissible Max. Current (25°C) (A)	Permissible Max. Current (55°C) (A)	Thermal Time Constant (25°C) (s)	Thermal Dissipation Constant (25°C) (mW/°C)
NTPAN3ROLDKB0	3.0 ±15%	5.4	4.7	135	26.8
NTPAN4R0LDKB0	4.0 ±15%	4.7	4.1	130	26.8
NTPAN6R0LDKB0	6.0 ±15%	3.9	3.4	130	26.8
NTPAJ4R0LDKB0	4.0 ±15%	4.0	3.5	125	21.8
NTPAJ6R0LDKB0	6.0 ±15%	3.4	2.9	125	21.8
NTPAJ8ROLDKB0	8.0 ±15%	3.0	2.6	130	21.8
NTPAJ100LDKB0	10.0 ±15%	2.6	2.2	130	21.8

Continued on the following page. 7

Continued from the preceding page.


Part Number	Resistance (25°C) (ohm)	Permissible Max. Current (25°C) (A)	Permissible Max. Current (55°C) (A)	Thermal Time Constant (25°C) (s)	Thermal Dissipation Constant (25°C) (mW/°C)
NTPAD3R9LDNB0	3.9 ±15%	3.3	2.9	65	18.2
NTPAD5R1LDNB0	5.1 ±15%	3.0	2.6	85	18.8
NTPAD8R0LDNB0	8.0 ±15%	2.7	2.3	65	18.7
NTPAD160LDNB0	16.0 ±15%	2.0	1.7	100	19.1
NTPAA2R2LDNB0	2.2 ±15%	3.7	3.2	70	13.5
NTPAA3R9LDNB0	3.9 ±15%	2.7	2.3	70	13.5
NTPAA5R1LDNB0	5.1 ±15%	2.5	2.2	70	13.5
NTPAA8R2LDNB0	8.2 ±15%	2.0	1.7	70	13.5
NTPAA100LDNB0	10.0 ±15%	1.7	1.5	70	13.5
NTPA9160LBMB0	16.0 ±15%	1.4	1.2	65	11.6
NTPA74R0LBMB0	4.0 ±15%	2.3	2.0	40	9.4
NTPA75ROLBMB0	5.0 ±15%	1.9	1.6	40	9.4
NTPA78ROLBMB0	8.0 ±15%	1.7	1.5	40	9.5
NTPA7100LBMB0	10.0 ±15%	1.4	1.2	40	9.5
NTPA7160LBMB0	16.0 ±15%	1.2	1.0	40	9.9
NTPA7220LBMB0	22.0 ±15%	1.0	0.88	40	9.1
NTPA55ROLBMB0	5.0 ±15%	1.7	1.5	20	5.6
NTPA5100LBMB0	10.0 ±15%	1.2	1.1	20	5.6

NTPAD/NTPA9/NTPA9 series are also available on tape. The final alphabet of the part number should be "DNB0=>D6A0", "BNB0 =>B1A0". Operating Temperature Range: -20°C to +160°C


Permissible Electrolytic Capacitor

	, ,					
Voltage (AC) Part Number	100Vrms	120Vrms	132Vrms	220Vrms	240Vrms	264Vrms
NTPAN	8600µF	5972µF	4936µF	1777µF	1493µF	1234µF
NTPAJ	5000µF	3472µF	2870µF	1033µF	868µF	717µF
NTPAD	2700µF	1875µF	1550µF	558µF	469µF	387µF
NTPAA	1400µF	972µF	803µF	289µF	243µF	201µF
NTPA9	800µF	556µF	459µF	165µF	139µF	115µF
NTPA74R0	700 5	106 5	402.5	1.45 5	122 5	100 5
NTPA75R0	700µF	486µF	402μF	145µF	122µF	100µF
NTPA78R0	F70 F	206 5	227.5	110 5	00.5	02.5
NTPA7100	570µF	396µF	327µF	118µF	99µF	82µF
NTPA7160	400 5	270 5	220 5	02.5	60.5	F.7. F.
NTPA7220	- 400μF	278µF	230µF	83µF	69μF	57μF
NTPA5	346µF	240µF	198µF	71µF	60µF	50μF


Application Circuit




Determination of Allowable Current




NTPAN3ROL Type




NTPAN6ROL Type




NTPAJ6R0L Type




NTPAJ100L Type




NTPAN4ROL Type




NTPAJ4R0L Type



NTPAJ8ROL Type



NTPAD3R9L Type





Continued on the following page. 🖊

37


Continued from the preceding page.

NTPAD5R1L Type







NTPAA3R9L Type




NTPAA8R2L Type




NTPAD8R0L Type




NTPAA2R2L Type



NTPAA5R1L Type




NTPAA100L Type




Continued on the following page. 🖊

Continued from the preceding page.


NTPA9160L Type




NTPA75ROL Type




NTPA7100L Type




NTPA7220L Type




NTPA74R0L Type




NTPA78ROL Type



NTPA7160L Type




NTPA55ROL Type



Continued on the following page. 7

Continued from the preceding page.

NTPA5100L Type



Inrush Current Suppression Lead Type (1) Caution/Notice

Caution (Storage and Operating Conditions)

- 1. This product is designed for Switching Power Supplies with smoothing capacitors.
 - Other applications of this product may result in fire.
- 2. Use this product within the specified maximum current. Otherwise it may catch fire in the worst case.
- 3. Use this product with smoothing capacitors within the specified maximum capacitance value. Otherwise it may catch fire in the worst case.
- 4. This product is designed for application in an ordinary environment (normal room temperature, humidity and atmospheric pressure).

- Do not use under the following conditions because all these factors can deteriorate the product characteristics cause failure and burn-out.
- (1) Corrosive gas or deoxidizing gas. (Chlorine gas, Hydrogen sulfide gas, Ammonia gas, Sulfuric acid gas, Nitric oxide gas, etc.)
- (2) Volatile or flammable gas
- (3) Dusty conditions
- (4) Under high or low pressure
- (5) Wet or humid conditions
- (6) Near with salt water, oils, chemical liquids or organic solvents
- (7) Strong vibrations
- (8) Other places where similar hazardous conditions exist.

(1) Caution (Others)

Be sure to provide an appropriate fail-safe function on your product to prevent secondary damage that may be caused by the abnormal function or the failure of our product.

Notice (Storage and Operating Conditions)

To keep the solderability of the product from degrading, the following storage condition is recommended.

- 1. Storage condition:
- Temperature -10 to +40°C
- Humidity less than 75%RH (not dewing condition)
- 2. Storage term:
 - Use this product within 6 months after delivery by first-in and first-out stocking system.
- 3. Handling after unpacking: After unpacking, reseal product promptly or store it in a sealed container with a drying agent.
- 4. Storage place:

Do not store this product in corrosive gas (Sulfuric acid gas, Chlorine gas, etc.) or in direct sunlight.

Notice (Rating)

Use this product within the specified temperature

Higher temperature may cause deterioration of the characteristics or the material quality of this product.

- 1. Be sure that the preheat-up does not melt the soldering of this product. Excessive heat may cause failure to open, short or insulation break
- 2. Do not touch the body with the soldering iron. The soldering point should be min. 5mm away from the root of the lead wire.
- Notice (Soldering and Mounting)

G

Inrush Current Suppression Lead Type (1) Caution/Notice

Notice (Handling)

- When this product is operated, the temperature of some areas may be about 160°C.
 Use proper surrounding parts and material that withstand such temperature. If they are inadequate and kept at high temperature for a long time, they may be deteriorated or may produce harmful gas.
 Such harmful gas may deteriorate the element of this product.
- This product does not have waterproof construction.
 Splashed water may cause failure mode such as deterioration of characteristics or current leak.
 Therefore, do not apply clean by immersing it into water or any solvent.
- 3. The ceramic element of this product is fragile, and care must be taken not to load an excessive press-force or not to cause a shock at handling. Such forces may cause cracking or chipping to the element.
- 4. Do not apply excessive force to the lead wire. Otherwise, it may cause the junction between lead wire and element to break or crack, or may crack the element.

Therefore, fix the lead wire of the element side when the lead wire is bent or cut.

Notice (Others)


- This product may allow the passing of higher current than its initial value if it receives inrush current again before it cools down enough to recover its original resistance.
 - Be sure to consider the highest current under actual operating conditions operating temperature.
- 2. The resin coating of this product does not guarantee insulating. Keep an adequate insulating distance from surrounding parts.

Inrush Current Suppression Lead Type Package

Minimum Order Quantity

	Bulk	Ammo Pack Taping		
Part Number	Minimum Quantity (pcs.)	Part Number	Minimum Quantity (pcs.)	
NTPAN_DKB0	50	-	-	
NTPAJ_DKB0	100	-	-	
NTPAD_DNB0	150	NTPAD_D6A0	400	
NTPAA_DNB0	300	NTPAA_D6A0	750	
NTPA9_BMB0	300	NTPA9_B1A0	1000	
NTPA7_BMB0	500	NTPA7_B1A0	1000	
NTPA5_BMB0	500	NTPA5_B1A0	1500	

Taping Dimensions (NTPAD/A_D6A0 Series)

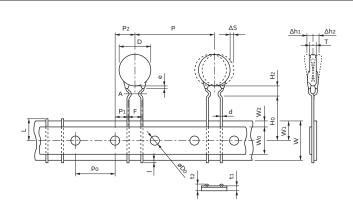

Item	Code	Dimensions (mm)
Pitch of Component	Р	30.0
Pitch of Sprocket Hole	Po Po	15.0±0.3
Lead Spacing	F	7.5±0.5
Length from Hole Center to Component Center	P ₂	7.5±1.5
Length from Hole Center to Lead	P ₁	3.75±1.0
Body Diameter	D	(refer to the table below)
Body Thickness	Т	(refer to the table below)
Deviation Along Tape, Left or Right	ΔS	±2.0
Carrier Tape Width	W	18.0±0.5
Position of Sprocket Hole	W1	9.0±0.5
Lead Distance between Reference and Bottom Plane	H ₀	16.0±0.5
Height of Component	H ₂	10.0 max.
Protrusion Length	I	+0.5 to -6.0
Diameter of Sprocket Hole	Do	4.0±0.1
Lead Diameter	d	0.8±0.05
Total Tape Thickness	t ₁	0.6±0.3
Total Thickness, Tape and Lead Wire	t ₂	2.0 max.
Deviation Across Tape	Δh1, Δh2	2.0 max.
Portion to Cut in Case of Defect	L	11.0 ⁺⁰ _{-2.0}
Hold down Tape Width	Wo	11.5 min.
Hold down Tape Position	W2	4.0 max.
Coating Extension on Lead	е	to line A


Туре	D (mm)	T (mm)
NTPAD	16.0 max.	5.5 max.
NTPAA	12.0 max.	5.0 max.

Continued on the following page. ${\cal J}$

Inrush Current Suppression Lead Type Package

Continued from the preceding page. ${f \Sigma}$

Taping Dimensions (NTPA9/7/5_B1A0 Series)



Item	Code	Dimensions (mm)
Pitch of Component	Р	12.7
Pitch of Sprocket Hole	Po	12.7±0.3
Lead Spacing	F	5.0 ^{+0.8} 0.3
Length from Hole Center to Component Center	P ₂	6.35±1.3
Length from Hole Center to Lead	P1	3.85±0.8
Body Diameter	D	(refer to the table below)
Body Thickness	Т	5.0 max.
Deviation Along Tape, Left or Right	ΔS	±1.5
Carrier Tape Width	W	18.0±0.5
Position of Sprocket Hole	W ₁	9.0 ^{+0.5} _{-0.75}
Lead Distance between Reference and Bottom Planes	Ho	16.0±1.0
Height of Component	H ₂	6.0 max.
Protrusion Length	I	+0.5 to -4.0
Diameter of Sprocket Hole	Do	4.0±0.3
Lead Diameter	d	0.6±0.05
Total Tape Thickness	t ₁	0.6±0.3
Total Thickness, Tape and Lead Wire	t ₂	2.0 max.
Deviation Across Tape	Δh1, Δh2	1.5 max.
Portion to Cut in Case of Defect	L	11.0 +0
Hold down Tape Width	Wo	11.0 min.
Hold down Tape Position	W2	4.0 max.
Coating Extension on Lead	е	to line A

Туре	D (mm)
NTPA9	11.0 max.
NTPA7	9.0 max.
NTPA5	6.0 max.

44

Global Locations

For details please visit www.murata.com



Note

1 Export Control

For customers outside Japan:

No Murata products should be used or sold, through any channels, for use in the design, development, production, utilization, maintenance or operation of, or otherwise contribution to (1) any weapons (Weapons of Mass Destruction [nuclear, chemical or biological weapons or missiles] or conventional weapons) or (2) goods or systems specially designed or intended for military end-use or utilization by military end-users.

For customers in Japan:

For products which are controlled items subject to the "Foreign Exchange and Foreign Trade Law" of Japan, the export license specified by the law is required for export.

- 2 Please contact our sales representatives or product engineers before using the products in this catalog for the applications listed below, which require especially high reliability for the prevention of defects which might directly damage a third party's life, body or property, or when one of our products is intended for use in applications other than those specified in this catalog.
 - Aircraft equipment
 - Aerospace equipment
 - 3 Undersea equipment
 - Power plant equipment
 - Medical equipment
 - Transportation equipment (vehicles, trains, ships, etc.)
 - Traffic signal equipment
 - S Disaster prevention / crime prevention equipment
 - Data-processing equipment
 - Application of similar complexity and/or reliability requirements to the applications listed above

- 3 Product specifications in this catalog are as of August 2016. They are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. If there are any questions, please contact our sales representatives or product engineers.
- 4 Please read rating and \(\tilde{\Delta}\)CAUTION (for storage, operating, rating, soldering, mounting and handling) in this catalog to prevent smoking and/or burning, etc.
- This catalog has only typical specifications.
 Therefore, please approve our product
 specifications or transact the approval sheet
 for product specifications before ordering.
- Please note that unless otherwise specified, we shall assume no responsibility whatsoever for any conflict or dispute that may occur in connection with the effect of our and/or a third party's intellectual property rights and other related rights in consideration of your use of our products and/or information described or contained in our catalogs. In this connection, no representation shall be made to the effect that any third parties are authorized to use the rights mentioned above under licenses without our consent.
- 7 No ozone depleting substances (ODS) under the Montreal Protocol are used in our manufacturing process.



www.murata.com

